
MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, CERAMIC DIELECTRIC (TEMPERATURE COMPENSATING), ESTABLISHED AND NON-ESTABLISHED RELIABILITY, STYLES CCR82 AND CC82

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-C-20.

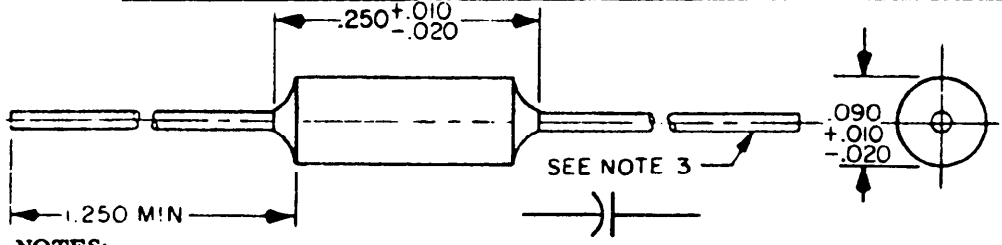

CIRCUIT DIAGRAM

INCHES	MM
.010	.25
.015	.38
.020	.51
.027	.69
.090	2.29
.250	6.35
1.250	31.75

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Lead diameter shall be .015 to .027.

FIGURE 1. Styles CCR82 and CC82 capacitors.

REQUIREMENTS:

Design and construction:
Dimensions and configuration: See figure 1.
Lead type: Axial.
Case type: Conformal coated.
DC rated voltage: See table I.
Operating temperature range: -55° to +125° C.
Characteristic: CG.
Failure rate level (CCR82 only): M (1.0%), P (0.1%), R (.01%) or S (.001%).

Thermal shock and voltage conditioning (CCR82 only): In accordance with MIL-C-20.

Capacitance: Within tolerance specified (see table I).

Dissipation factor: In accordance with MIL-C-20.

Dielectric withstanding voltage: In accordance with MIL-C-20.
Body insulation - Test II.

Source: https://assist.dla.mil -- Downloaded: 202610-15T17:07Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics.

Type designation 1/ 2/	Rated voltage volts, dc	Nominal capacitance pF	Cap. tol.	Type designation 1/ 2/	Rated voltage volts, dc	Nominal capacitance pF	Cap. tol.
CC-82CG820--	200	82	FGJK	CC-82CG470--	100	470	FGJK
CC-82CG101--	200	100	FGJK	CC-82CG561--	100	560	FGJK
CC-82CG121--	200	120	FGJK	CC-82CG681--	100	680	FGJK
CC-82CG271--	100	270	FGJK	CC-82CG821--	50	820	FGJK
CC-82CG331--	100	330	FGJK	CC-82CG102--	50	1000	FGJK
CC-82CG391--	100	390	FGJK				

1/ Complete type designation will include the following:
1st dash - Symbol "R" (for style CCR82) or dash will be deleted (for style CC82).
2nd dash - Applicable capacitance tolerance symbol.
3rd dash - Applicable failure rate level symbol (CCR82 only) or dash will be deleted (for style CC82).

2/ Capacitors deleted since the previous issue shall be replaced by selecting a capacitor with the nearest parameter.

Solderability: In accordance with MIL-C-20.

Resistance to soldering heat: In accordance with MIL-C-20.

Life: In accordance with MIL-C-20, operating condition 2.

Marking: Method I of MIL-STD-1285, as shown in following example:
JCG - "J" brand (J); and characteristic (CG).
820 - Capacitance value.
GM6 - Cap. tolerance (G); FR level, CCR82 only (M); and year code (6 for 1976).
ATM - Lot code (A); and trademark (TM).

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army -
Navy - OS
Air Force - 85
DSA - ES

User activities:
Army -
Navy - AS, SH, MC
Air Force -

Preparing activity:
Air Force - 11

Agent:
DSA - ES

(Project 5910-1189-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:07Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

C 16061

Source: https://assist.dla.mil -- Downloaded: 202610-15T17:07Z
Check the source to verify that this is the current version before use.

FOLD

ASD/ENESS
Wright-Patterson AFB, O 45433
OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE AIR FORCE
DoD-318

U.S. MAIL

ASD/ENESS
Wright-Patterson AFB, Ohio 45433

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:07Z
Check the source to verify that this is the current version before use.