MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, CERAMIC DIELECTRIC
(TEMPERATURE COMPENSATING),
ESTABLISHED AND NON-ESTABLISHED RELIABILITY,
STYLES CCR16 AND CC16

This amendment forms a part of Military Specification Sheet MIL-C-20/40B, dated 5 November 1976, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

* Figure 1, delete and substitute:

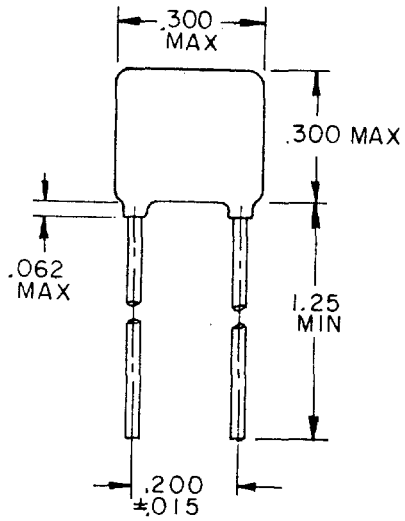

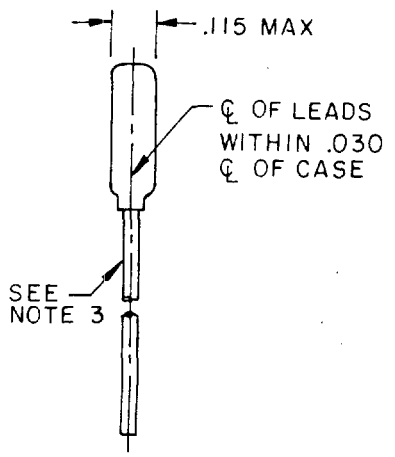

INCHES	MM
.002	.05
.015	.38
.020	.51
.030	.76
.062	1.57
.115	2.92
.200	5.08
.300	7.62
1.25	31.8



CIRCUIT DIAGRAM

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Lead diameter shall be .020 ±.002.

FIGURE 1. Styles CCR16 and CC16 capacitors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:08Z
Check the source to verify that this is the current version before use.

PAGE 3

Marking, line 2, delete and substitute: "JCG - 'J' brand (ER only) (J); and characteristic (CG)."

NOTE: The margins of this amendment are marked with an asterisk to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - ER
Navy - EC
Air Force - 11

Review activities:
Army -
Navy - OS
Air Force - 85
DLA - ES

Jser activities:
Army -
Navy - AS, SH, MC
Air Force -

Preparing activity:
Air Force - 11

Agent:
DLA - ES

(Project 5910-1323-2)

☆U.S. GOVERNMENT PRINTING OFFICE: 1980 — 603-121/779

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:08Z
Check the source to verify that this is the current version before use.