NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.


MIL-PRF-20/31A
26 AUG 1976
SUPERSEDING
MIL-C-20/31
25 May 1973

PERFORMANCE SPECIFICATION SHEET

# CAPACITORS, FIXED, CERAMIC DIELECTRIC (TEMPERATURE COMPENSATING), ESTABLISHED AND NON-ESTABLISHED RELIABILITY, STYLES CCR79 AND CC79

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-PRF-20.

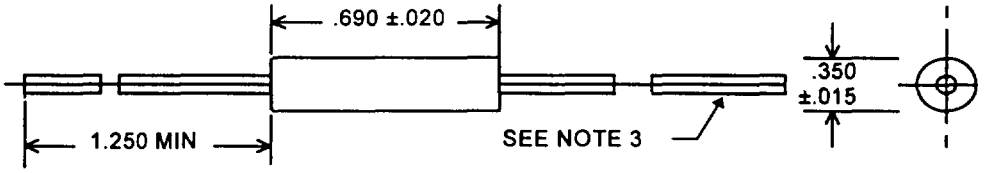


| INCHES | MM |
|---|---|
| .015 | .38 |
| .020 | .51 |
| .027 | .69 |
| .350 | 8.89 |
| .690 | 17.53 |
| 1.250 | 31.75 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Lead diameter shall be .015 to .027.

FIGURE 1. Styles CCR76 and CC76 capacitors.

REQUIREMENTS:

Design and construction:
Dimensions and configuration: See figure 1.
Lead type: Axial.
Case type: Tubular, molded.
DC rated voltage: See table I.
Operating temperature range: -55° to +125°C.
Characteristic: CG.
Failure rate level (CCR79 only): M (1.0%) or P (0.1%).

Temperature cycling and voltage conditioning (CCR79 only): In accordance with MIL-PRF-20.

Capacitance: Within tolerance specified (see table I).

Dissipation factor: In accordance with MIL-PRF-20.

Dielectric withstanding voltage: In accordance with MIL-PRF-20.
Body insulation - Test II.

Solderability: In accordance with MIL-PRF-20.

Resistance to soldering heat: In accordance with MIL-PRF-20.

Life: In accordance with MIL-PRF-20, operating condition 2.

Marking: In accordance with MIL-PRF-20, method I.

FSC 5910



Source: https://assist.dla.mil -- Downloaded: 202640-15T17:06Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics.

| Type designation 1/ | Rated voltage (volts, dc) | Nom. cap. (pF) | Cap. tol. | Type designation 1/ | Rated voltage (volts, dc) | Nom. cap. (pF) | Cap. tol. |
|---|---|---|---|---|---|---|---|
| CC-79CG392-- | 200 | 3,900 | FGJK | CC-79CG223-- | 100 | 22,000 | FGJK |
| CC-79CG472-- | 200 | 4,700 | | CC-79CG273-- | 100 | 27,000 | |
| CC-79CG562-- | 200 | 5,600 | | CC-79CG333-- | 100 | 33,000 | |
| CC-79CG682-- | 200 | 6,800 | | CC-79CG393-- | 100 | 39,000 | |
| CC-79CG822-- | 200 | 8,200 | | CC-79CG473-- | 50 | 47,000 | |
| CC-79CG103-- | 200 | 10,000 | | CC-79CG563-- | 50 | 56,000 | |
| CC-79CG153-- | 100 | 15,000 | | CC-79CG683-- | 50 | 68,000 | |
| CC-79CG183-- | 100 | 18,000 | | CC-79CG823-- | 50 | 82,000 | |

1/ Complete type designation will include the following:

1st dash - Symbol "R" (for style CCR79) or dash will be deleted (for style CC79).
2nd dash - Applicable capacitance tolerance symbol.
3rd dash - Applicable failure rate level symbol (CCR79 only) or dash will be deleted (for style CC79).

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army -
Navy - OS
Air Force - 99
DSA - ES

User activities:
Army -
Navy - AS, SH, MC
Air Force -

Preparing activity:
Air Force - 11

Agent:
DSA - ES

(Project 5910-1205-4)

☆U.S. GOVERNMENT PRINTING OFFICE: 1976-603-766/6777



Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:06Z
Check the source to verify that this is the current version before use.