INCH-POUND
MIL-PRF-20/36H
24 March 2017
SUPERSEDING
MIL-PRF-20/36G
21 April 2011

PERFORMANCE SPECIFICATION SHEET

CAPACITOR, FIXED, CERAMIC DIELECTRIC (TEMPERATURE COMPENSATING), ESTABLISHED AND NON-ESTABLISHED RELIABILITY, STYLES CCR06 AND CC06

Style CC06 is inactive for new design after 19 September 1983. Use CCR06.

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the capacitors described herein shall consist of this specification sheet and MIL-PRF-20.


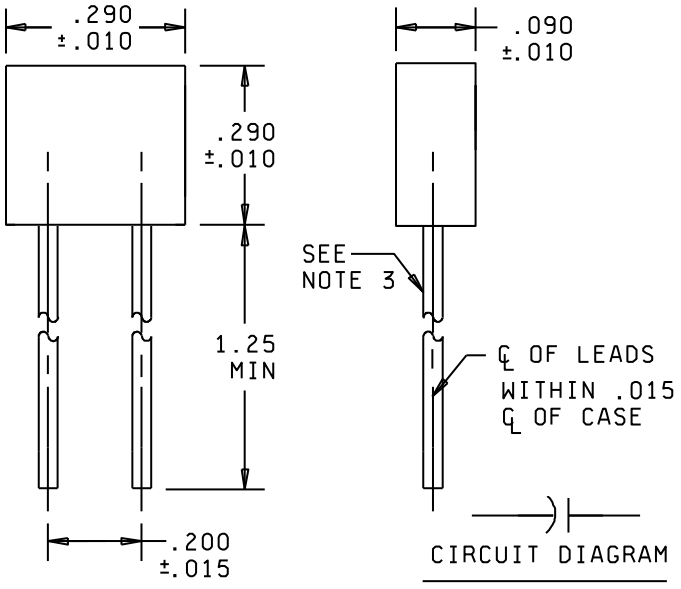


FIGURE 1. Styles CCR06 and CC06 capacitors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:07Z
Check the source to verify that this is the current version before use.

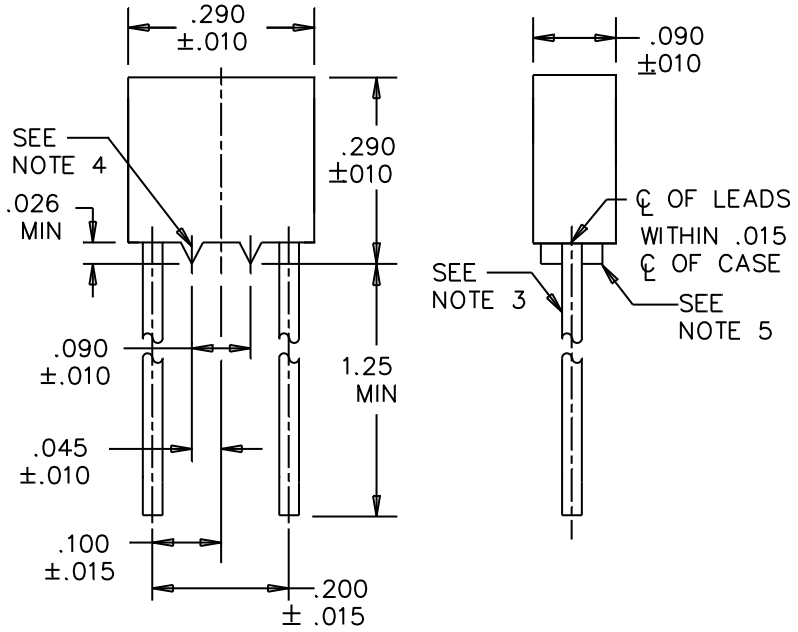

OPTIONAL CONFIGURATION WITH STANDOFFS (CCR06 ONLY)

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Lead diameter shall be .023 inch (0.58 mm) to .029 inch (0.74 mm).
4. Optional standoffs for style CCR06 shall be of triangular shape so that the standoffs will provide line contact with surface upon which the capacitor is mounted. The shape of the triangle is optional.
5. Thickness of standoffs shall be .075 inch (1.90 mm) to the body thickness.
6. Lead length may be a minimum of .625 inch (15.88 mm) for use in tape and reel automatic insertion equipment, when specified.
7. At the option of the user, the standoff configuration may be furnished as a replacement for the nonstandoff configuration of the same style.

Inches	mm
.010	0.25
.015	0.38
.026	0.66
.045	1.14
.090	2.29
.100	2.54
.200	5.08
.290	7.37
1.250	31.80

FIGURE 1. Styles CCR06 and CC06 capacitors - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:07Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: see figure 1.

Lead type: Radial.

Case type: Molded.

DC rated voltage: See table I.

Operating temperature range: -55°C to +125°C.

Characteristic: CG.

Failure rate level (CCR06 only) (percent per 1,000 hours): M (1.0), P (0.1), R (.01) or S (.001).

Thermal shock and voltage conditioning (CCR06 only): In accordance with MIL-PRF-20.

Capacitance: Within tolerance specified (see table I).

TABLE I. Capacitor characteristics.

Part or Identifying Number (PIN) 1/	Rated voltage (volts, dc)	Nominal capacitance (pF)	Capacitance tolerance
CC - 06CG361 - - -	200	360	FGJ
CC - 06CG391 - - -	200	390	FGJ
CC - 06CG431 - - -	200	430	FGJ
CC - 06CG471 - - -	200	470	FGJ
CC - 06CG511 - - -	200	510	FGJ
CC - 06CG561 - - -	200	560	FGJ
CC - 06CG621 - - -	200	620	FGJ
CC - 06CG681 - - -	200	680	FGJ
CC - 06CG751 - - -	200	750	FGJ
CC - 06CG821 - - -	200	820	FGJ
CC - 06CG911 - - -	200	910	FGJ
CC - 06CG102 - - -	200	1,000	FGJ
CC - 06CG112 - - -	200	1,100	FGJ
CC - 06CG122 - - -	200	1,200	FGJ
CC - 06CG132 - - -	200	1,300	FGJ
CC - 06CG152 - - -	200	1,500	FGJ
CC - 06CG162 - - -	200	1,600	FGJ
CC - 06CG182 - - -	200	1,800	FGJ
CC - 06CG202 - - -	100	2,000	FGJ
CC - 06CG222 - - -	100	2,200	FGJ
CC - 06CG242 - - -	100	2,400	FGJ
CC - 06CG272 - - -	100	2,700	FGJ
CC - 06CG302 - - -	100	3,000	FGJ
CC - 06CG332 - - -	100	3,300	FGJ
CC - 06CG362 - - -	100	3,600	FGJ
CC - 06CG392 - - -	100	3,900	FGJ

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:07Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.


PIN 1/	Rated voltage (volts, dc)	Nominal capacitance (pF)	Capacitance tolerance
CC - 06CG432 - - -	100	4,300	FGJ
CC - 06CG472 - - -	100	4,700	FGJ
CC - 06CG512 - - -	50	5,100	FGJK
CC - 06CG562 - - -	50	5,600	FGJK
CC - 06CG622 - - -	50	6,200	FGJK
CC - 06CG682 - - -	50	6,800	FGJK
CC - 06CG752 - - -	50	7,500	FGJK
CC - 06CG822 - - -	50	8,200	FGJK
CC - 06CG912 - - -	50	9,100	FGJK
CC - 06CG103 - - -	50	10,000	FGJK
CC - 06CG123 - - -	50	12,000	FGJK
CC - 06CG153 - - -	50	15,000	FGJK
CC - 06CG183 - - -	50	18,000	FGJK

1/ Complete PIN will include the following:
1st dash - Symbol “R” (for style CCR06) or dash will be deleted (for style CC06).
2nd dash - Applicable capacitance tolerance symbol.
3rd dash - Applicable failure rate level symbol (CCR06 only) or dash will be deleted (for style CC06).
4th dash - Symbol “V” for standoffs CCR06 only) or dash will be deleted (for style CCR06 without standoffs and style CC06).

Solderability: The leads shall be solderable up to .020 inch (0.51 mm) from the body egress.

Workmanship: For style CCR06 with standoff, exposed copper or bare leads shall be permitted to a maximum of .020 inch (0.51 mm) from the body egress. For style CCR06 without standoffs and style CC06, workmanship shall be in accordance with MIL-PRF-20.

Marking: Method I of MIL-STD-1285. At the option of the manufacturer, the marking may be placed on one side of the capacitor, or the marking may be placed on two lines as long as it is in the same order as shown in the following examples:

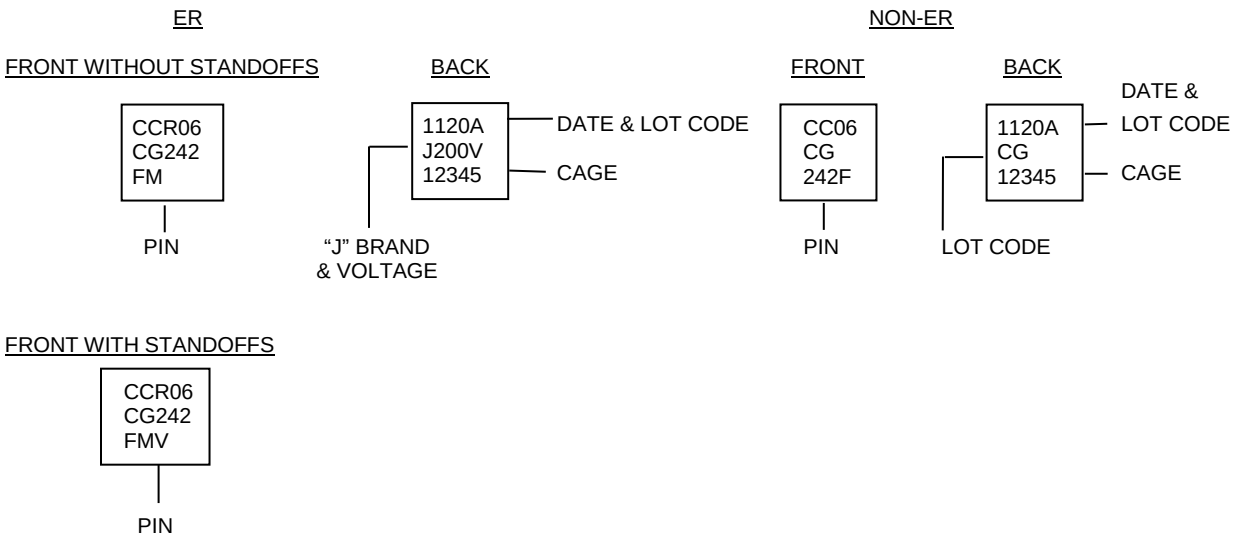

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:07Z
Check the source to verify that this is the current version before use.

Referenced documents. In addition to MIL-PRF-20, this specification sheet references the following document:

MIL-STD-1285

Changes from previous issue: The margins of this specification sheet are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5910-2017-012)

Review activities:
Navy - AS, MC, OS, SH
Air Force - 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:07Z
Check the source to verify that this is the current version before use.