NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

INCH-POUND


MIL-PRF-20/37D
30 June 1988
SUPERSEDING
MIL-C-20/37C
5 November 1976

PERFORMANCE SPECIFICATION SHEET

CAPACITORS, FIXED, CERAMIC DIELECTRIC, (TEMPERATURE COMPENSATING), ESTABLISHED AND NON-ESTABLISHED RELIABILITY, STYLES CCR07 AND CC07

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the capacitors described herein shall consist of this specification and the latest issue of MIL-PRF-20.

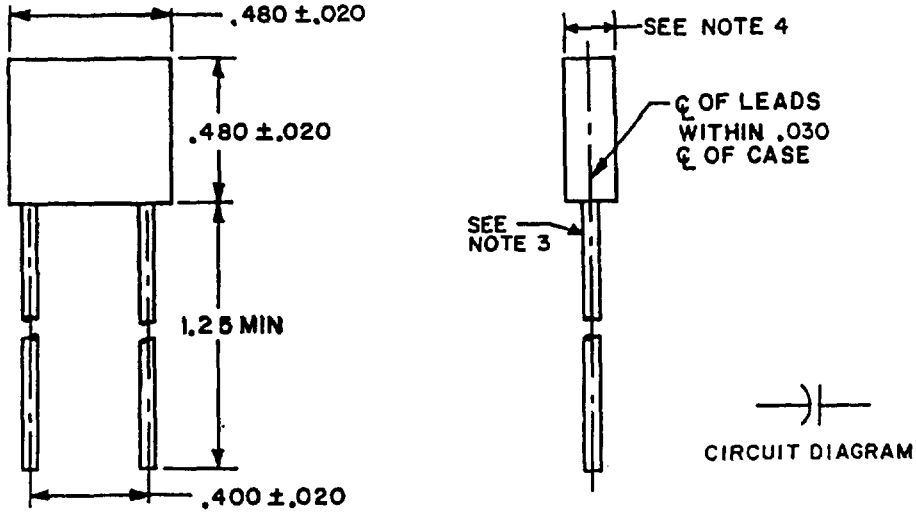

Inches	mm
.020	0.51
.030	0.76
.400	10.16
.480	12.19
1.25	31.8

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Lead diameter shall be .025 $^{+.004}_{-.001}$ (0.64 $^{+0.10}_{-0.03}$ mm).
4. Thickness shall be .200 max (5.08 mm) for 100,00 pF capacitor or .140 ± .010 (3.56 ± 0.25 mm) for all other capacitors.

FIGURE 1. Styles CCR05, CC05, CCR09 and CC09 capacitors.

Ⓓ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:08Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1.

Lead type: Radial.

Case type: Molded.

DC rated voltage: See table I.

Operating temperature range: -55°C to +125°C.

Characteristic: CG.

Failure rate level (CCR07 only): M (1.0%), P (0.1%), R (.01%) or S (.001%).

Thermal shock and voltage conditioning (CCR07 only): In accordance with MIL-C-20.

Capacitance: Within tolerance specified (see table I).

Dissipation factor: In accordance with MIL-C-20.

Dielectric withstanding voltage: In accordance with MIL-C-20.

Body insulation - Test II.

TABLE I. Capacitor characteristics.

Type designation 1/ 2/	Rated voltage	Nom. cap.	Cap. tol.	Type designation 1/ 2/	Rated voltage	Nom. cap.	Cap. tol.
	Volts, dc	pF			Volts, dc	pF	
CC-07CG222--	200	2,200	FGJK	CC-07CG183--	50	18,000	FGJK
CC-07CG272--	200	2,700	FGJK	CC-07CG223--	50	22,000	FGJK
CC-07CG332--	200	3,300	FGJK	CC-07CG273--	50	27,000	FGJK
CC-07CG392--	200	3,900	FGJK	CC-07CG333--	50	33,000	FGJK
CC-07CG472--	200	4,700	FGJK	CC-07CG393--	50	39,000	FGJK
CC-07CG562--	100	5,600	FGJK	CC-07CG473--	50	47,000	FGJK
CC-07CG682--	100	6,800	FGJK	CC-07CG563--	50	56,000	FGJK
CC-07CG822--	100	8,200	FGJK	CC-07CG683--	50	68,000	FGJK
CC-07CG103--	100	10,000	FGJK	CC-07CG823--	50	82,000	FGJK
CC-07CG123--	100	12,000	FGJK	CC-07CG104--	50	100,000	FGJK
CC-07CG153--	50	15,000	FGJK				

1/ Complete type designation will include the following:

1st dash - Symbol "R" (for style CCR07) or dash will be deleted (for style CC07).
2nd dash - Applicable capacitance tolerance symbol.
3rd dash - Applicable failure rate level symbol (CCR07 only) or dash will be deleted (for style CC07).

2/ Capacitors deleted since the previous issue shall be replaced by selecting a capacitor with the nearest parameter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:08Z
Check the source to verify that this is the current version before use.

Solderability: In accordance with MIL-C-20.

Resistance to soldering heat: In accordance with MIL-C-20.

Life: In accordance with MIL-C-20, operating condition 2.

(D) Marking: In accordance with MIL-C-20, method I.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AV
Navy - OS
DLA - ES

User activities:
Navy - AS, MC, SH

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5910-1627)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:08Z
Check the source to verify that this is the current version before use.