NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.


MIL-PRF-20/38A
6 SEP 1977
SUPERSEDING
MIL-C-20/38
25 May 1973

PERFORMANCE SPECIFICATION SHEET

CAPACITORS, FIXED, CERAMIC DIELECTRIC
(TEMPERATURE COMPENSATING),
ESTABLISHED AND NON-ESTABLISHED RELIABILITY,
STYLES CCR08 AND CC08

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-PRF-20.

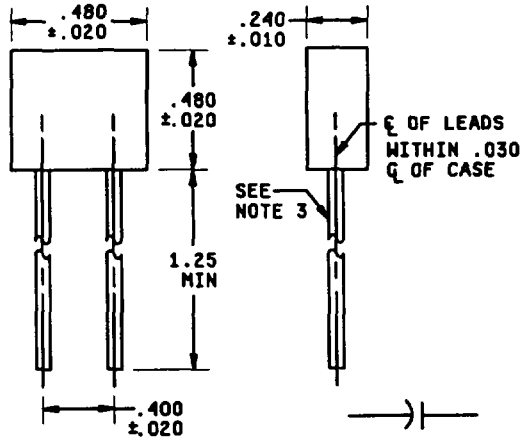

INCHES	MM
.001	.03
.004	.10
.010	.25
.020	.51
.025	.64
.030	.76
.240	6.10
.400	10.16
.480	12.19
1.25	31.75

CIRCUIT DIAGRAM

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Lead diameter shall be $.025^{+.004}_{-.001}$

FIGURE 1. Styles CCR08 and CC08 capacitors.

REQUIREMENTS:

Design and construction:
Dimensions and configuration: See figure 1.
Lead type: Radial.
Case type: Molded.
DC rated voltage: See table I.
Operating temperature range: -55° to +125°C.
Characteristic: CG.
Ⓐ Failure rate level (CCR08 only): M (1.0%), P (0.1%), R (0.01%), or S (0.001%).

Thermal shock and voltage conditioning (CCR08 only): In accordance with MIL-PRF-20.

Capacitance: Within tolerance specified (see table I).

Dissipation factor: In accordance with MIL-PRF-20.

Dielectric withstanding voltage: In accordance with MIL-PRF-20.
Body insulation - Test II .

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:08Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics.

Type designation 1/	Rated voltage (Volts, dc)	Nominal capacitance (pF)	Cap. tol.	Type designation 1/	Rated voltage (Volts, dc)	Nominal capacitance (pF)	Cap. tol.
CC-08CG392--	200	3,900	GJK	CC-08CG183--	100	18,000	GJK
CC-08CG472--	200	4,700	GJK	CC-08CG563--	50	56,000	GJK
CC-08CG153--	100	15,000	GJK	CC-08CG683--	50	68,000	GJK

1/ Complete type designation will include the following:
1st dash - Symbol "R" (for style CCR08) or dash will be deleted (for style CC08).
2nd dash - Applicable capacitance tolerance symbol.
3rd dash - Applicable failure rate level symbol (CCR08 only) or dash will be deleted (for style CC08).

Solderability: In accordance with MIL-C-20.

Resistance to soldering heat: In accordance with MIL-C-20.

Life: In accordance with MIL-C-20, operating condition 2.

Marking: In accordance with MIL-C-20, method I.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army -
Navy - OS
Air Force - 85
DLA - ES

User activities:
Army -
Navy - AS, SH, MC
Air Force -

Preparing activity:
Air Force - 11

Agent:
DLA - ES

(Project 5910-1248)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:08Z
Check the source to verify that this is the current version before use.