INCH-POUND

MIL-PRF-20/38B
21 June 2001
SUPERSEDING
MIL-PRF-20/38A
6 September 1977

PERFORMANCE SPECIFICATION SHEET

CAPACITORS, FIXED, CERAMIC DIELECTRIC
(TEMPERATURE COMPENSATING),
ESTABLISHED AND NON-ESTABLISHED RELIABILITY,
STYLES CCR08 AND CC08

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the capacitors described herein shall consist of this specification and the latest issue of MIL-PRF-20.

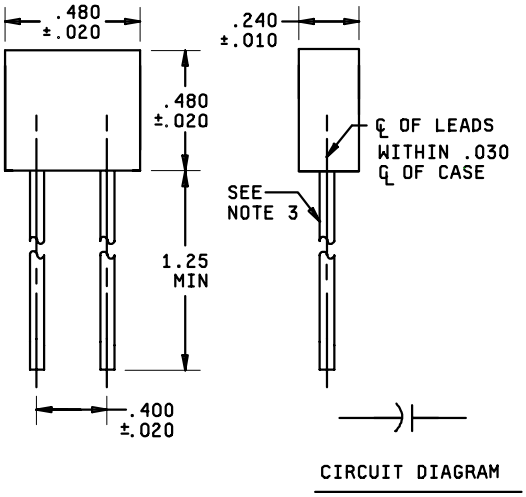

Inches	mm
.001	.03
.004	.10
.010	.25
.020	.51
.025	.64
.030	.76
.240	6.10
.400	10.16
.480	12.19
1.250	31.75

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Lead diameter shall be .025 +.004, -.001 (0.64 +0.10, -0.03 mm).

FIGURE 1. Styles CCR07 and CC07 capacitors.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Lead type: Radial.

Case type: Molded.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:08Z
Check the source to verify that this is the current version before use.

DC rated voltage: See table I.

Operating temperature range: -55°C to +125°C.

Characteristic: CG.

Failure rate level (CCR08 only): M (1.0 percent), P (0.1 percent), R (.01 percent) or S (.001 percent).

Thermal shock and voltage conditioning (CCR08 only): In accordance with MIL-PRF-20.

Capacitance: Within tolerance specified (see table I).

Dissipation factor: In accordance with MIL-PRF-20.

Dielectric withstanding voltage: In accordance with MIL-PRF-20.

Body insulation: Test II.

TABLE I. Capacitor characteristics.

Type designation 1/	Rated voltage (volts, dc)	Nominal capacitance (pF)	Capacitance tolerance	Type designation 1/	Rated voltage (volts, dc)	Nominal capacitance (pF)	Capacitance tolerance
CC-08CG392--	200	3,900	GJK	CC-08CG183--	100	18,000	GJK
CC-08CG472--	200	4,700	GJK	CC-08CG563--	50	56,000	GJK
CC-08CG153--	100	15,000	GJK	CC-08CG683--	50	68,000	GJK

1/ Complete type designation will include the following:
1st dash - Symbol “R” (for style CCR08) or dash will be deleted (for style CC08).
2nd dash - Applicable capacitance tolerance symbol.
3rd dash - Applicable failure rate level symbol (CCR08 only) or dash will be deleted (for style CC08).

Solderability: In accordance with MIL-PRF-20.

Resistance to soldering heat: In accordance with MIL-PRF-20.

Life: In accordance with MIL-PRF-20, operating condition 2.

Marking: In accordance with MIL-PRF-20, method I.

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Navy - AS, MC, OS, SH
Air Force - 99

Preparing activity:
DLA - CC

(Project 5910-2116-09)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:08Z
Check the source to verify that this is the current version before use.