| INCH-POUND |
MIL-C-55302/132B
1 June 1993
SUPERSEDING
MIL-C-55302/132A
9 April 1986

MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES RECEPTACLE SOCKET CONTACTS, STRAIGHT THRU, 64 OR 96 CONTACT POSITIONS, FOR PRINTED WIRING BOARDS (.100 INCH SPACING)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-55302


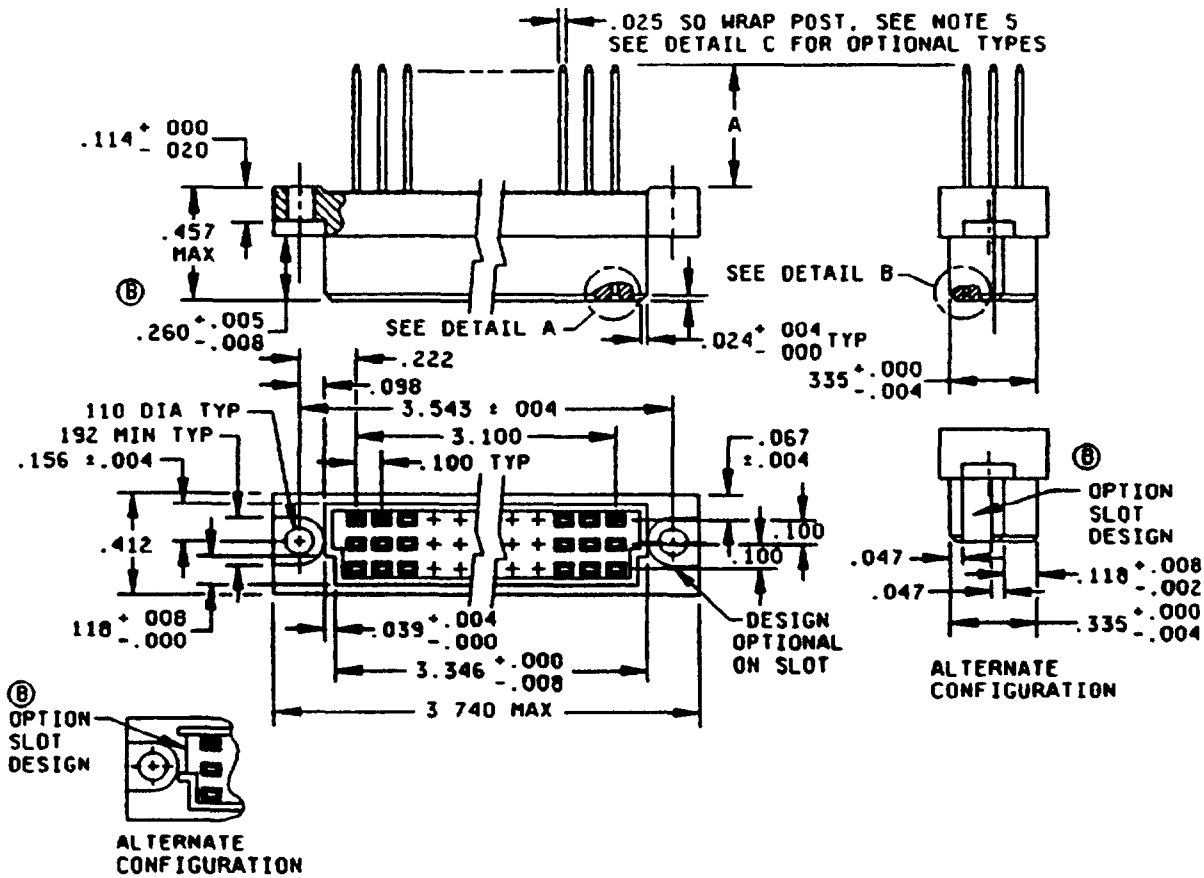


FIGURE 1. Connector, receptacle, 100 (2 54 mm) spacing


Ⓑ denotes changes

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

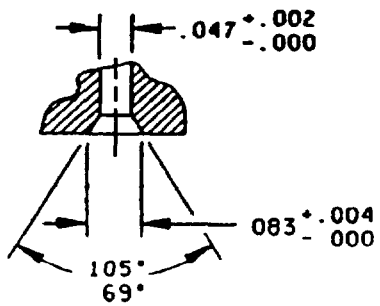

DETAIL A

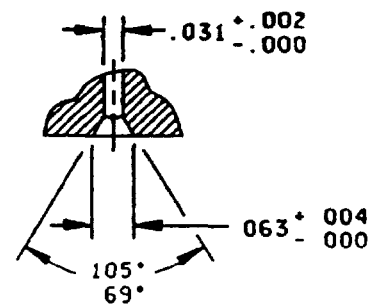


DETAIL B

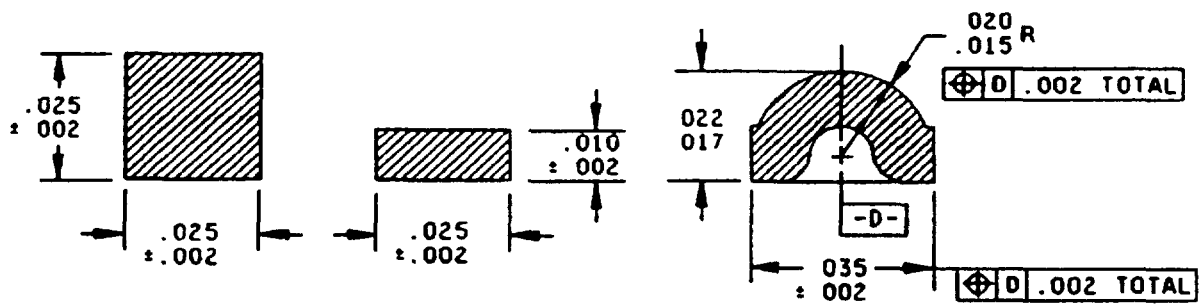


DETAIL C OPTIONAL DESIGNS FOR PRINTED CIRCUIT TAILS

FIGURE 1 Connector, receptacle, 100 (2.54 mm) spacing - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.



VIEW FROM TERMINATION END
CONNECTOR MARKING

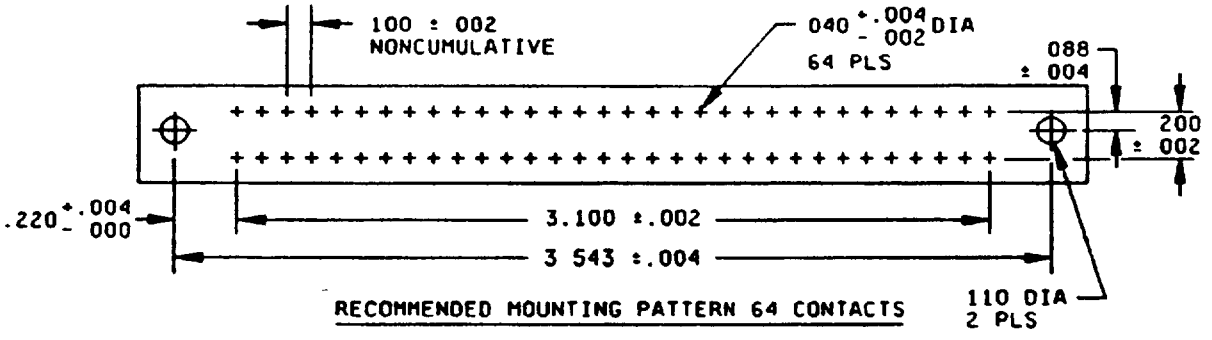

RECOMMENDED MOUNTING PATTERN 64 CONTACTS

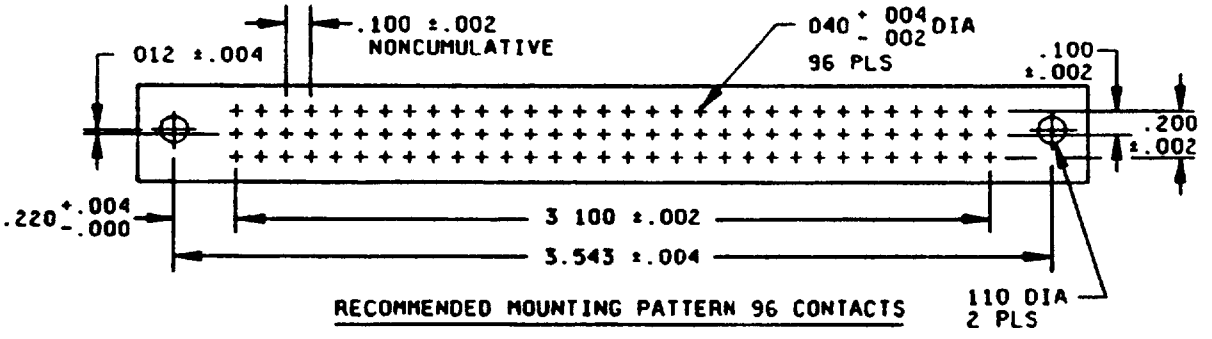

RECOMMENDED MOUNTING PATTERN 96 CONTACTS

FIGURE 1 Connector, receptacle, .100 (2 54 mm) spacing - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

Part number	Number of contacts	Type of termination	"A" dimension
M55302/132-01	96	Printed circuit	104 ± 010
M55302/132-02	96	Wrappost	.520 ±.020 1/
M55302/132-03	96	Wrappost	.677 ±.020 2/
M55302/132-04	64	Printed circuit	.104 ±.020 3/
M55302/132-05	64	Wrappost	.520 ±.020 1/ 3/
M55302/132-06	64	Wrappost	677 ± 020 2/ 3/


1/ This dimension is suitable for 2 wraps of 26, 28, or 30 AWG
2/ This dimension is suitable for 3 wraps of 26, 28, or 30 AWG
3/ These connectors have the middle row (row 8) of contacts excluded

Inches	mm	Inches	mm	Inches	mm	Inches	mm
002	0.05	.024	0 61	083	2 11	200	5 08
004	0.10	.025	0.64	.088	2.24	.220	5.59
.008	0.20	.031	0 79	.091	2.31	.222	5 64
010	0.25	035	0.89	100	2.54	.335	8 51
012	0 30	039	0 99	110	2 79	412	10 46
015	0 38	040	1 02	114	2 90	457	11 61
017	0.43	.047	1 19	118	3.00	3.100	78 74
020	0 51	063	1.60	156	3 96	3.346	84 99
022	0.56	.067	1.70	.192	4 88	3.543	89.99
						3.740	95 00

NOTES
1 Dimensions are in inches.
2 Metric equivalents are given for general information only
3 Unless otherwise specified, tolerance is ± 005 (0 13 mm)
4 These connectors make with connectors specified in MIL-C-55302/131
5 Wrappost contacts shall be in accordance with MIL-STD-1130


FIGURE 1 Connector, receptacle, 100 (2 54 mm) spacing - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

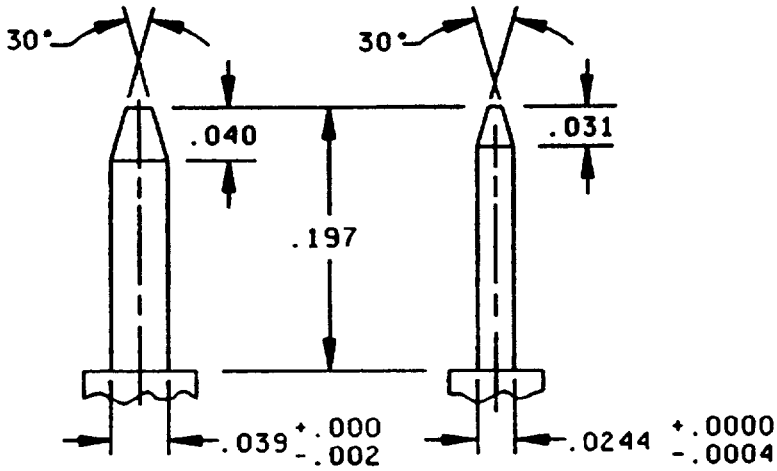

TEST PIN A

Inches	mm
0004	0 010
002	0 05
.008	0 20
0220	0 559
0244	0.620
031	0 79
039	0 99
040	1.02
197	5 00

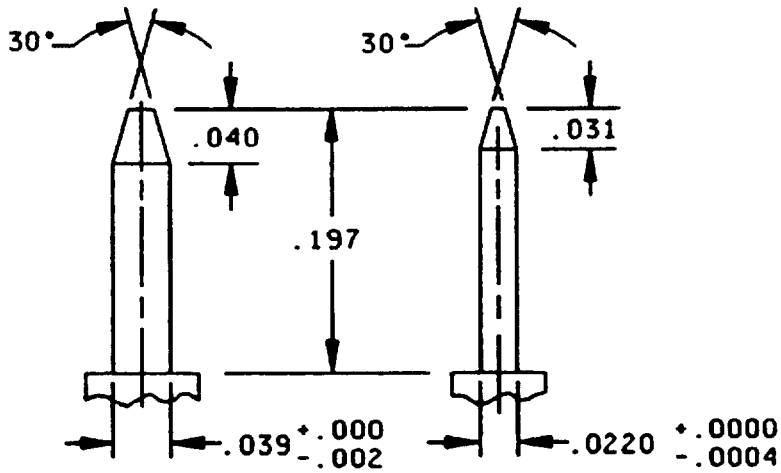


TEST PIN B

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only
3. Unless otherwise specified, tolerances are ±.008 (0 20 mm) on decimals and 2° on angles

FIGURE 2 Test pins

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

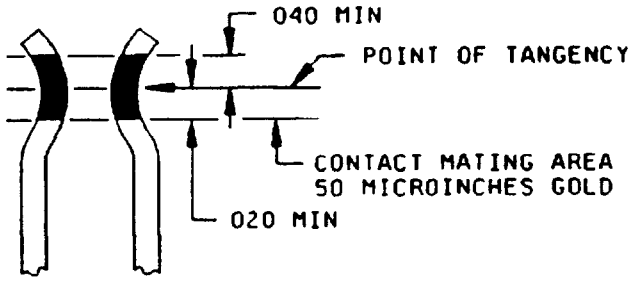

Inches	mm
020	0.51
.040	1 02

NOTES
1 Dimensions are in inches
2 Metric equivalents are given for general information only

FIGURE 3 Contact plating

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration. See figure 1

Materials and finish

Contact plating. The contact mating area shall be gold in accordance with MIL-G-45204, type II, grade C or D, class 1, over nickel plating in accordance with QQ-N-290, 30 to 150 microinches The contact mating area is defined in figure 3.

Nonfunctional areas Any portion of the contact other than the contact mating area or termination area can be plated in accordance with paragraph 3.3 3 4.3 section E of MIL-C-55302.

Contact identification See figure 1

Body design The insulator body of each receptacle may be two-piece construction secured by mechanical means

Contact separation force. Separation force shall be 5 ounce minimum, using the following test pins

1. Insert and withdraw test pin A (see figure 2)
2 Insert test pin B (see figure 2) fully and withdraw test pin B .071 inch and measure the separation force

Mating and unmating. The maximum mating force, in pounds, shall not exceed a value equal to 0 25 times the number of contacts, and the withdrawal force, in pounds, shall be a minimum of 0.025 times the number of contacts and shall not exceed the measured insertion force, when the housing is loaded with contacts and mated with connector specified in MIL-C-55302/131

Contact rating 3 0 amperes maximum per contact.

Contact resistance: No individual contact pair shall have a resistance exceeding .020 ohm

Contact retention. 3 pounds minimum per contact

Dielectric withstanding voltage

Sea level 1,000 volts rms, 50 or 60 hertz

High altitude: 300 volts rms, 50 or 60 hertz.

Oversize pin exclusion. Not applicable

Part number. See figure 1.

CONCLUDING MATERIAL

Custodians
Army - CR
Navy - EC
Air Force - 17

Review activities:
Army - AR, MI, AV, AT
Navy - SH, AS, OS
Air Force - 11, 85, 99
DLA - ES

User activities
Army - ME, WC
Navy - MC
Air Force - 19

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-3873)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.