MILITARY SPECIFICATION SHEET

(A) CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES:
PLUG, PIN CONTACTS, 41, 66, 114 CONTACT POSITIONS,
FOR PRINTED WIRING BOARDS (.100 X .050 OFFSET GRID)

This specification is approved for use by Rome Air Development Center, Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connectors described herein shall consist of this document and the latest issue of Specification MIL-C-55302.

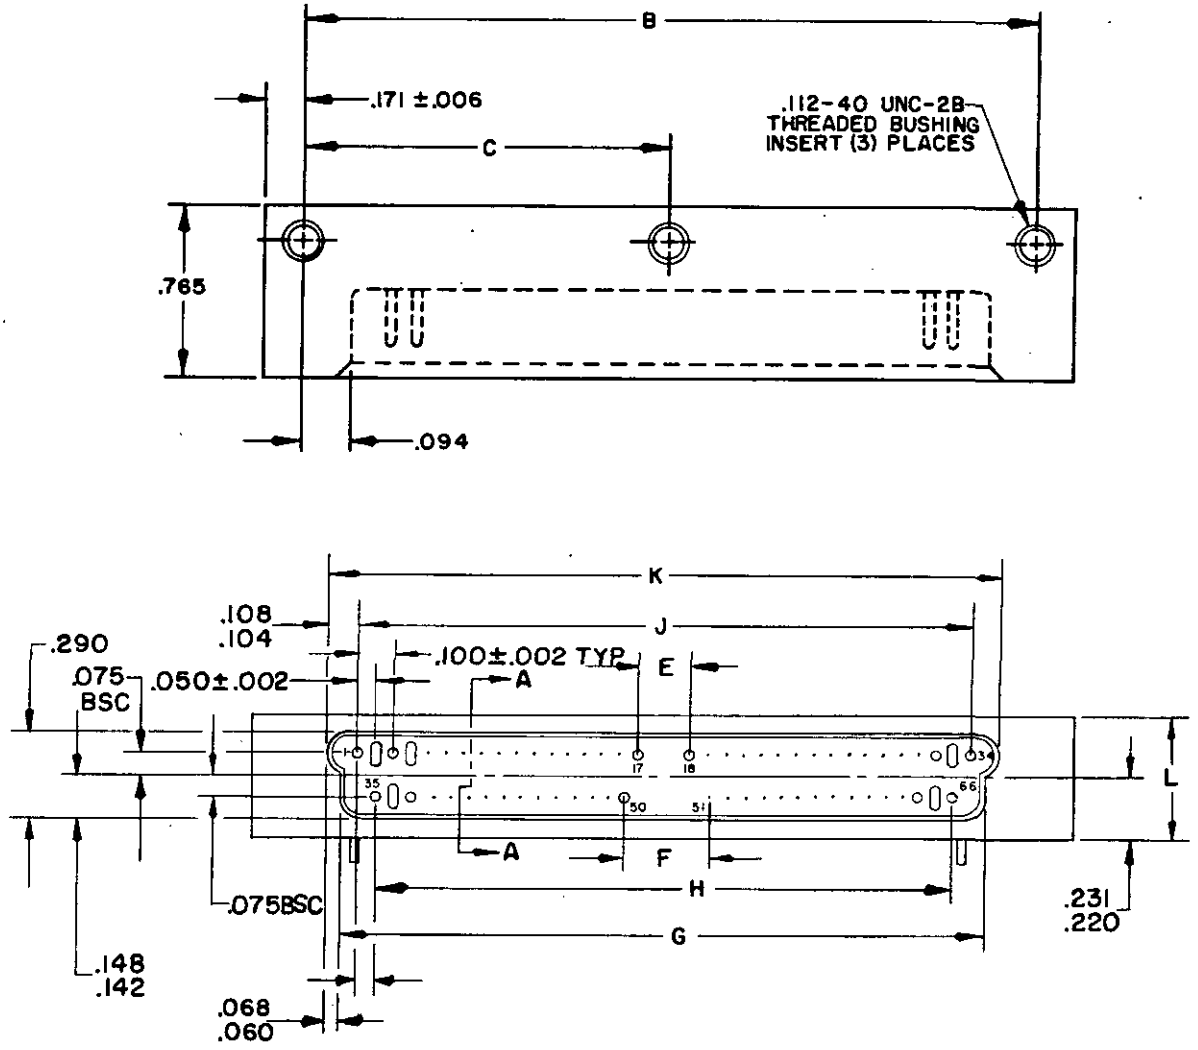


FIGURE 1. Connectors, plug (.100 X .050 offset grid).

(A) Denote change

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

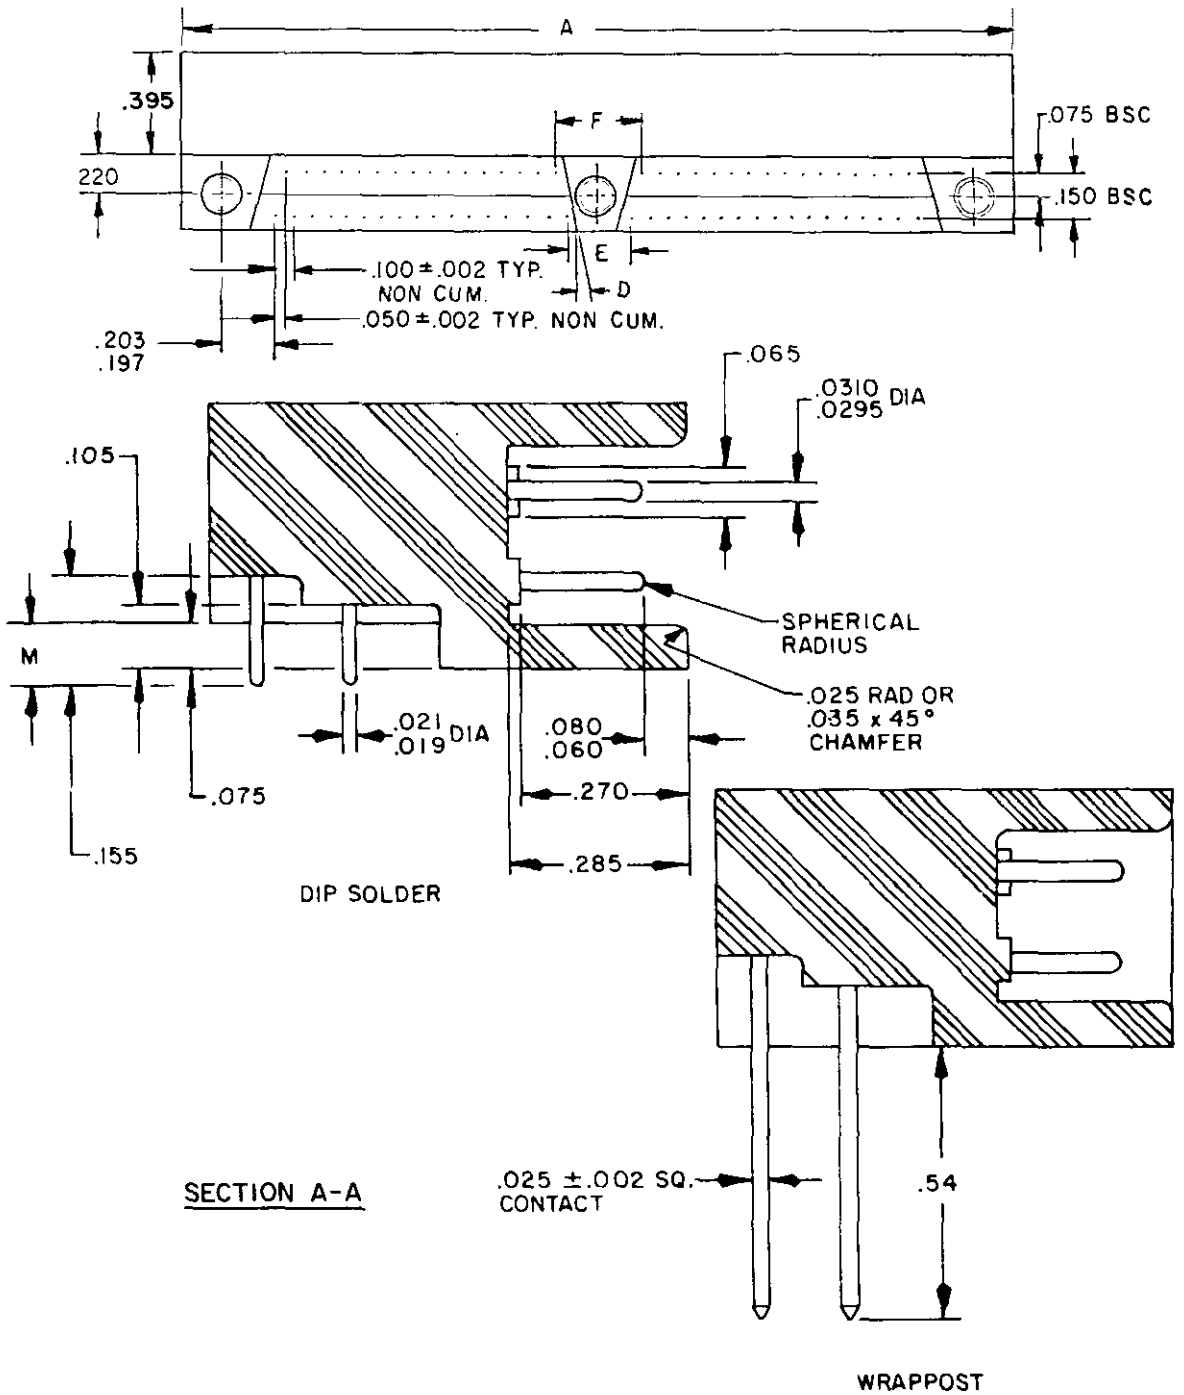


FIGURE 1. Connectors, plug (.100 X .050 offset grid) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.002	.05	.104	2.64	.270	6.86	3.200	81.28
.010	.25	.105	2.67	.285	7.24	3.400	86.36
.019	.48	.108	2.74	.290	7.37	3.500	88.90
.021	.53	.125	3.18	.300	7.62	3.585	91.06
.025	.64	.142	3.61	.365	9.27	3.712	94.28
.0295	.75	.148	3.76	.400	10.16	3.900	99.06
.031	.79	.150	3.81	.436	11.07	4.24	107.70
.035	.89	.155	3.94	.452	11.48	5.900	149.86
.050	1.27	.160	4.06	.500	12.70	6.000	152.40
.060	1.52	.172	4.37	.54	13.72	6.085	154.56
.068	1.73	.197	5.00	.765	19.43	6.215	157.86
.075	1.91	.203	5.16	1.950	49.53	6.400	162.56
.080	2.03	.220	5.59	2.400	60.96	6.74	171.20
.094	2.39	.231	5.87	2.74	69.60		
.100	2.54						

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm) on three place decimals, ±.02 (.51 mm) on two place decimals, and ±2° on angles.
4. These connectors mate with connectors specified in MIL-C-55302/82.

FIGURE 1. Connectors, plug (.100 X .050 offset grid) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

Ⓐ TABLE I. Dash number, contacts, and dimensions.

Dash number	Number of contacts	P.C. board thickness	Type of termination	DIMENSIONS											
				A	B	BSC C	D	BSC E	BSC F	G	H	J	K	L	M
-01	66	1/16 IN	Dip solder	4.24	3.900	1.950	18° 30'	.300	.400	3.585	3.400	3.500	3.712	.436	.105
-02 1/	66	1/16 IN	Dip solder												.105
-03	66	3/32 IN	Dip solder												.160 .125
-04 1/	66	3/32 IN	Dip solder												.160 .125
-05	66	N/A	Wrappost												N/A
-06	41	1/16 IN	Dip solder	2.74	2.400	2.400	N/A	N/A	N/A	2.085	1.900	2.000	2.212	.436	.105
-07 1/	41	1/16 IN	Dip solder												.105
-08	41	3/32 IN	Dip solder												.160 .125
-09 1/	41	3/32 IN	Dip solder												.160 .125
-10	114	1/16 IN	Dip solder	6.74	6.400	3.200	18° 30	.400	.500	6.085 ±.010	5.900	6.000	6.215 ±.010	.452	.105
-11 1/	114	1/16 IN	Dip solder												.105
-12	114	3/32 IN	Dip solder												.160 .125
-13 1/	114	3/32 IN	Dip solder												.160 .125
-14	114	N/A	Wrappost												N/A

1/ No SN60 or SN63 on termination end.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Ⓐ Dimensions and configuration: See figure 1 and table I. Connector is designed for assembly to an .068/.058 printed circuit board. or .099/.089 printed circuit board.

Material: In accordance with MIL-C-55302.

Contacts: Phosphor bronze per QQ-W-321, alloy 510.

Plating: The contact plating shall be gold per MIL-G-45204, type II, grade C, class 1 over suitable copper plate. The termination end of the pin contact shall be hot dipped in SN60 or SN63 solder in accordance with QQ-S-571, to within .015 of mounting surface. The thickness of the solder shall be no less than .0001 and no more than .001 inch. Not more than .000050 inch of gold shall be retained after dipping.

Contact identification: See figure 1.

Contact resistance: The potential drop across mated contacts at 3 amperes test current shall not exceed 25 millivolts, and after corrosion test shall not exceed 30 millivolts.

Dielectric withstanding voltage:
Sea level: 1500 Vac (rms) test.
50,000 feet altitude: 500 Vac (rms) test.

Current rating: 3.0 amperes maximum per contact. 2.25 amperes continuous per contact per connector at room ambient.

Part number: See table I.

Custodian:
Air Force - 17

Review activities:
Air Force - 11, 85, 99
DLA - ES

User activity:
Air Force - 19

Preparing activity:
Air Force - 17

Agent:
DLA - ES

(Project 5935-F094-16)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-55302/83A(USAF)

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76

Replaces edition of 1 Jan 72 which may be used.

S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DoD-316

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

ROME AIR DEVELOPMENT CENTER, AFSC
RADC (RBRD)
GRIFFIS AFB, NY 13441

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.