
MIL-A-55339/36A
1 February 1983
SUPERSEDING
MIL-A-55339/36
11 January 1977

MILITARY SPECIFICATION SHEET

ADAPTER, CONNECTOR, COAXIAL, RADIO FREQUENCY,
(WITHIN SERIES TNC), CLASS 2, STRAIGHT PLUG

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connector adapter described herein shall consist of this specification and the latest issue of MIL-A-55339.

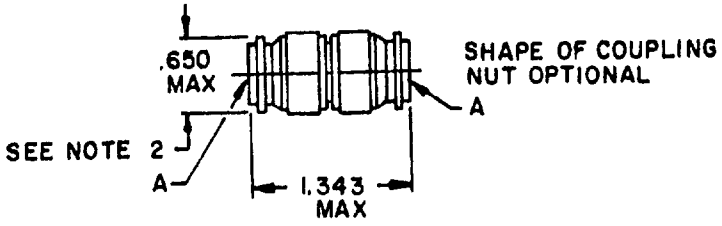

Reference	Series	Contact	Figure
A	TNC	Pin	2

INCHES	MM
.650	16.51
1.343	34.11


NOTES:
1. Dimensions are in inches.
2. This dimension is the largest overall diameter of the connector.
3. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.


FIGURE 1. General configuration.

Ⓐ denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:07Z
Check the source to verify that this is the current version before use.

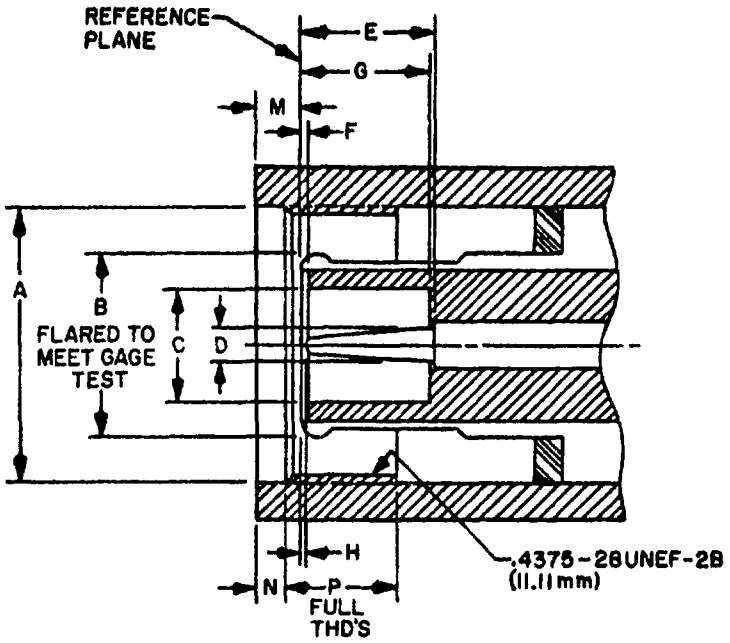



Ltr	Dimensions in inches with metric equivalents (mm) in parentheses	
	Minimum	Maximum
A	.440 (11.18)	
B	Gage test	
C	.190 (4.83)	
D	.052 (1.32)	.054 (1.37)
E	.210 (5.33)	230 (5.84)
F	.006 (.15)	
G	.208 (5.28)	.228 (5 79)
H	.003 (.08)	.040 (1.02)
J	.081 (2.06)	.087 (2.21)
K	.078 (1.98)	
M		.078 (1.98)
N	.063 (1.60)	
P	.156 (3.96)	

NOTES:
1. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
2. Three holes .027 (.69 mm) minimum diameter equally spaced for safety wiring. Location on coupling nut optional.
3. All undimensioned pictorial configurations are for reference purposes only.

FIGURE 2. Mating dimensions for male terminations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:07Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

General configuration: See figure 1.

Impedance: 50 ohms, nominal.

Working voltage:
Sea level - 500 V rms.
70,000 feet - 125 V rms.

Frequency range: 0 to 11 GHz.

Temperature range: -65°C to +165°C.

Performance (installation torque is not applicable).

Dimensions: See figures 1 and 2.

Center contact retention:
Axial force - 6 lbs, minimum.
Torque - 4 in. oz, minimum.

Force to engage and disengage:
Longitudinal force - Not applicable.
Torque - 2 in. lb, maximum.

Mating characteristics:
Outer contact, series TNC.
Minimum test ring ID - .319 in., maximum.
Pin finish - 16 microinches.
Insertion force - 5 lbs, maximum.
Insertion depth - .093 in., minimum.
Number of insertions - 1.
Maximum test ring ID - .324 in., minimum.
Test ring finish - 16 microinches.
Insertion depth - .031 in. of their tip ends.
Number of insertions - 1.

Permeability: <2.0.

Seal:
Pressurized - Not applicable.
Weatherproof - Not applicable.

Insulation resistance: 5,000 megohms, minimum.

Voltage standing wave ratio: 1.35 maximum at .5 to 11 GHz.

RF leakage (total): -60 dB, minimum, 2 to 3 GHz.

RF insertion loss: .18 dB, maximum, 9 GHz

(.06 $\sqrt{F\ (GHz)}$ dB maximum tested at 3 GHz).

Durability: 500 cycles minimum at 12 cycles/minute maximum. The connector shall meet the mating characteristics and force to engage and disengage requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:07Z
Check the source to verify that this is the current version before use.

Dielectric withstanding: Test voltage - 1,500 V rms, minimum (sea level).

Ⓐ Contact resistance (milliohms, maximum):

Contact	Initial	After
Center	2.0	2.5
Outer	.45	Not applicable

Vibration, high frequency: Interruptions - 1 µs, maximum.

Shock. Test condition I.

Thermal shock: Test condition C.

Moisture resistance: 200 megohms, minimum.

Corona level:
Voltage - 375 V, minimum.
Altitude - 70,000 feet, minimum.

RF high potential withstanding voltage:
RF voltage - 1,000 V rms, minimum.
Frequency - 5 MHz, minimum.

Salt spray (corrosion): Test condition B.

Coupling proof torque: 15 lbs.

Coupling mechanism retention force: 100 lbs, minimum.

Marking: As specified in MIL-A-55339.
Part No. M55339/36-00001.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI, AT
Navy - SH
Air Force - 11, 99
DLA - ES

User activities:
Navy - AS, MC
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Army - CR

(Project 5935-3342)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:07Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12062 WASHINGTON D. C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Communications - Electronics Command
ATTN: DRSEL-ED-TO
Fort Monmouth, NJ 07703

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:07Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil – Downloaded: 2025-08-12 13:07Z
Check the source to verify that this is the current version before use.