
MILITARY SPECIFICATION SHEET

Ⓐ ADAPTER, CONNECTOR, COAXIAL, RADIO FREQUENCY
(WITHIN SERIES TNC JACK TO TWO SERIES TNC JACKS), CLASS 2, "T" JAMNUT MOUNT

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense

The complete requirements for procuring the connector adapter described herein shall consist of this document and the latest issue of Specification MIL-A-55339.

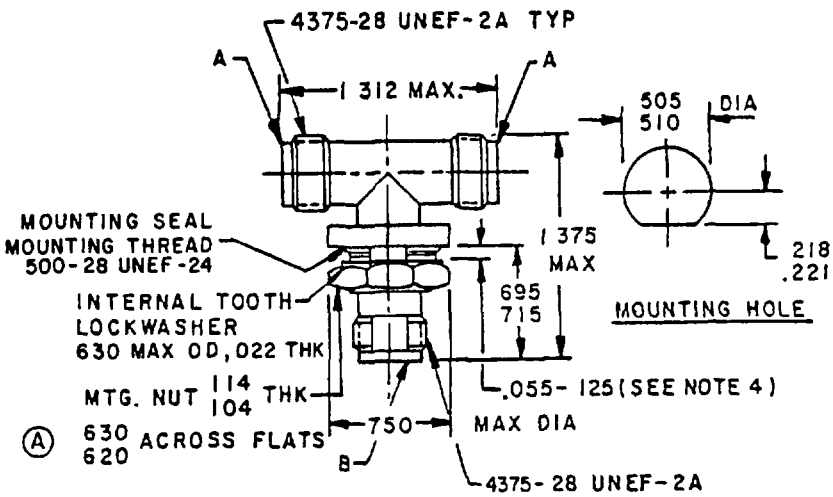

INCHES	MM
.022	.56
.055	1.40
.104	2 64
.114	2.90
.125	3.18
.218	5 54
.221	5.61
4375	11 112
.500	12 70
.505	12 83
.510	12.95
620	15 75
630	16 00
695	17.65
715	18 16
750	19 05
1 312	33.32
1 375	34 92


Reference	Series	Contact	Figure
A & B	TNC	Socket	2

NOTES.
1. Dimensions are in inches.
2. This dimension is the largest overall diameter of the connector
3. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
4. Panel thickness .055 (1 40 mm) minimum, .125 (3.18 mm) maximum
Ⓐ5. Unless otherwise specified, tolerances are ±.005 (.13 mm) on three place decimals and ±.010 (.25 mm) on two place decimals


FIGURE 1 General configuration.

Ⓐ denotes changes

Source: https://assist.dla.mil -- Downloaded: 20260-22T23:08Z
Check the source to verify that this is the current version before use.

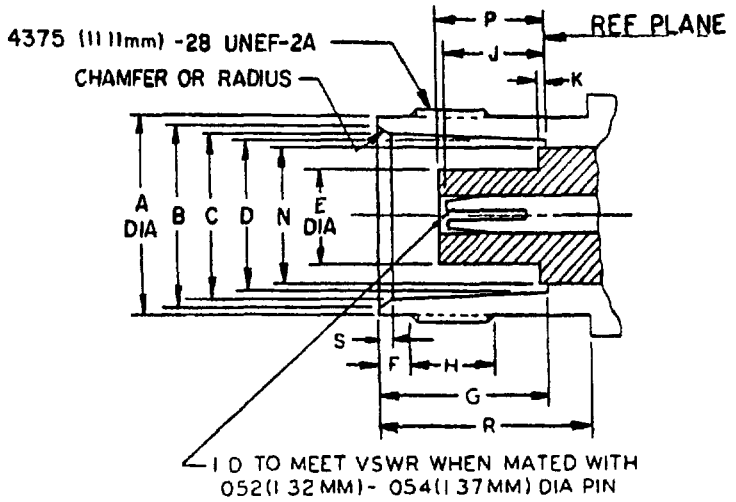

Ltr	Dimensions in inches with metric equivalents (mm) in parentheses (see note)	
	Minimum	Maximum
A	.378 (9.60)	.381 (9.68)
B	.345 (8.76)	.356 (9.04)
C	.327 (8.31)	.333 (8.46)
D	.319 (8.10)	.321 (8.15)
E		.186 (4.72)
F	.068 (1.73)	.088 (2.24)
G	.329 (8.36)	.333 (8.46)
H	.187 (4.75)	
J	.186 (4.72)	.206 (5.23)
K		.006 (.15)
L	.195 (4.95)	
M	.081 (2.06)	.087 (2.21)
N		.256 (6.50)
P	.188 (4.78)	.208 (5.28)
R	.415 (10.54)	
S	.015 (.38)	.030 (.76)



*N dimension applies to that portion (if applicable) of the dielectric which protrudes beyond the metal shoulder (or reference plane) by dimension K

NOTES:
1. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
2 All undimensioned pictorial configurations are for reference purposes only.

FIGURE 2. Mating dimensions for socket terminations

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:08Z
Check the source to verify that this is the current version before use.

DESIGN AND CONSTRUCTION·

General configuration See figure 1

Impedance 50 ohms, nom

Working voltage Sea level - 500 Vrms
70,000 feet - 125 Vrms

Frequency range 0 to 11 GHz

Temperature range -65° to +165°C

PERFORMANCE (installation torque is not applicable)

Dimensions See figures 1 and 2.

Center contact retention. Axial force - 6 lb, min
Torque - 4 in oz, min

Force to engage and disengage Longitudinal force - Not applicable
Torque - 2 in lb, max

Mating characteristics.
Center contact (socket)
Oversize test pin dia - 057 in., min
Insertion depth - 125 in , min
No of insertions - 1
Max test pin (insertion force test)
Steel test pin dia - 054 in , min.
Pin finish - 16 microinches
Insertion force - 2 lb, max
No of insertions - 1.
Min test pin (withdrawal force)
Steel test pin dia - 052 in., max
Pin finish - 16 microinches
Withdrawal force - 2 oz, min
No of withdrawals - Not applicable
Outer contact - Not applicable

Permeability <2 0

Seal·
Hermetic - Not applicable
Pressurized - Not applicable.
Weatherproof - 30 PSI max (mounting seal)

Insulation resistance 5,000 megohms, min

VSWR. Not applicable

RF leakage (total) Not applicable

RF insertion loss Not applicable

Durability 500 cycles minimum at 12 cycles/min maximum The connector shall meet the mating characteristics and force to engage and disengage requirements

Dielectric withstanding Test voltage - 1,500 Vrms, min (sea level)

Contact resistance (milliohms, max)

Contact	Initial	After
Center	2 5	3 0
Outer	0 25	Not applicable

Source: https://assist.dla.mil -- Downloaded: 202610-22T23:08Z
Check the source to verify that this is the current version before use.

Vibration, high frequency: Interruptions - 1 µs, max.

Shock: Test condition I.

Thermal shock: Test condition C

Moisture resistance: 200 megohms, min.

Corona level: Voltage - 375 V, min
Altitude - 70,000 feet, min.

RF high potential withstanding voltage: RF voltage - 1,000 Vrms, min
Frequency - 5 MHz, min

Salt spray (corrosion): Test condition B.

MARKING: As specified in MIL-A-55339.
Part no. M55339/50-00001

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities.
Army - AR, MI
Navy - SH, OS
Air Force - 11, 99
DLA - ES

User activities:
Army - AT
Navy - MC, AS, SH
Air Force - 19

Preparing activity
Army - CR

Agent:
DLA - ES

(Project 5935-3057-18)

Source: https://assist.dla.mil -- Downloaded: 202610-22T23:08Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No 22-R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity

DOCUMENT IDENTIFIER AND TITLE

MIL-A-55339/50A

NAME OF ORGANIZATION AND ADDRESS

HQ, USA CORADCOM
ATTN DRDCO-CM-DM
Fort Monmouth, NJ 07703

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:08Z
Check the source to verify that this is the current version before use.

FOLD

HQ, USA CORADCOM
ATTN DRDCO-CM-DM
Fort Monmouth, NJ 07703

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314



HQ, USA CORADCOM
ATTN DRDCO-CM-DM
Fort Monmouth, NJ 07703

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-22T23:08Z
Check the source to verify that this is the current version before use.