
MILITARY SPECIFICATION SHEET

# CAPACITORS, CHIP, MULTIPLE LAYER, FIXED, UNENCAPSULATED, CERAMIC DIELECTRIC, ESTABLISHED RELIABILITY STYLE CDR33 METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the capacitors described herein shall consist of this specification and the latest issue of MIL-C-55681.

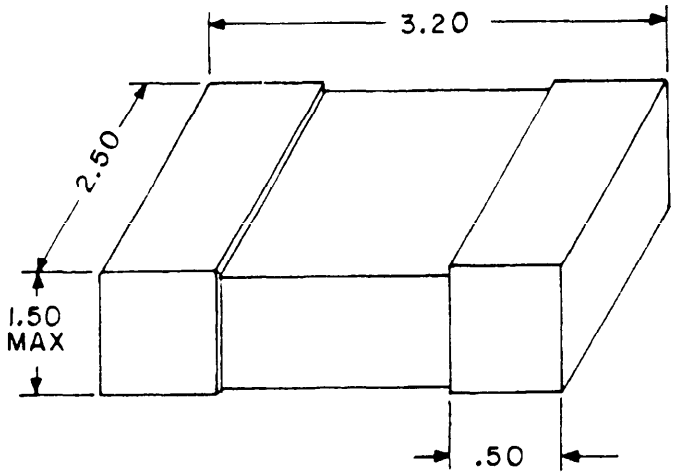


| MM | INCHES |
|---|---|
| .25 | .010 |
| .30 | .012 |
| .50 | .020 |
| .60 | .023 |
| 1.50 | .059 |
| 2.50 | .098 |
| 3.20 | .125 |

NOTES:
1. Dimensions are in millimeters.
2. Dimensions are for bare chips, for solder coated terminations add .60 to the length and .30 to the width and thickness.
3. Unless otherwise specified, tolerance is ±.25.

FIGURE 1. Style CDR33 capacitors.



FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:55Z
Check the source to verify that this is the current version before use.

TABLE I. Style CDR33 capacitor characteristics.

| Type designation 1/ | Capacitance | Capacitance tolerance | Rated temperature and voltage-temperature limits | Rated voltage |
|---|---|---|---|---|
| | (pF) | | | volts, dc |
| CDR33BP102B--- | 1,000 | F, J, K | BP | 100 |
| CDR33BP112B--- | 1,100 | " | " | " |
| CDR33BP122B--- | 1,200 | " | " | " |
| CDR33BP132B--- | 1,300 | " | " | " |
| CDR33BP152B--- | 1,500 | " | " | " |
| CDR33BP162B--- | 1,600 | " | " | " |
| CDR33BP182B--- | 1,800 | " | " | " |
| CDR33BP202B--- | 2,000 | " | " | " |
| CDR33BP222B--- | 2,200 | " | " | " |
| CDR33BP242A--- | 2,400 | " | " | 50 |
| CDR33BP272A--- | 2,700 | " | " | " |
| CDR33BP302A--- | 3,000 | " | " | " |
| CDR33BP332A--- | 3,300 | " | " | " |
| CDR33BX153B--- | 15,000 | K, M | BX | 100 |
| CDR33BX183B--- | 18,000 | " | " | " |
| CDR33BX223B--- | 22,000 | " | " | " |
| CDR33BX273B--- | 27,000 | " | " | " |
| CDR33BX393A--- | 39,000 | " | " | 50 |
| CDR33BX473A--- | 47,000 | " | " | " |
| CDR33BX563A--- | 56,000 | " | " | " |
| CDR33BX683A--- | 68,000 | " | " | " |
| CDR33BX823A--- | 82,000 | " | " | " |
| CDR33BX104A--- | 100,000 | " | " | " |

1/ The complete part number will include additional symbols to indicate capacitance tolerance, termination and failure rate level.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:55Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Body structure: Multi-layer, unencapsulated monolithic ceramic.

Capacitance value: See table I.

Capacitance tolerance: See table I.

Operating temperature range: -55°C to +125°C.

Marking: In accordance with MIL-C-55681.

Custodians:
Army - ER
Navy - EC
Air Force - 11

Review activities:
Navy - AS, OS
Air Force - 17, 85, 99
DLA - ES

User activities:
Navy - MC, SH
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Army - ER

(Project 5910-1438-3)



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:55Z
Check the source to verify that this is the current version before use.