INCH-POUND

MIL-P-80104D
27 March 1990
SUPERSEDING
MIL-P-80104C
23 March 1984

MILITARY SPECIFICATION

PRESS, SWAGING, WIRE ROPE FITTINGS, HYDRAULICALLY POWERED

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers hydraulical presses used for swaging fittings onto wire rope.

1.2 Classification. The swaging press shall be of the following sizes. The size to be furnished shall be as specified (see 3.5 and 6.2).

Size 1 - 200 ton

Size 2 - 350 ton

Size 3 - 500 ton

Size 4 - 800 ton

Size 5 - 1000 ton

Size 6 - 1200 ton

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Industrial Plant Equipment Center, ATTN: DIPEC-SSG, 2163 Airways Blvd. Memphis, Tennessee 38114-5051, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 3442

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:38Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, stardards, and hardbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

MILITARY

MIL-M-18058 Machinery, Metal and Woodworking, Packaging of.

STANDARDS

FEDERAL

FED-STD-H28 Screw Thread Standards for Federal Services.

MILITARY

MIL-STD-461 Electromagnetic Emission and Susceptibility Requirements for the Control of Electromagnetic Interference.

MIL-STD-462 Electromagnetic Interference Characteristics, Measurement of.

(Unless otherwise indicated copies of Federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

CODE OF FEDERAL REGULATIONS (CFR)

U.S. DEPARTMENT OF LABOR, OCCUPATIONAL SAFETY AND HEALTH ADMINISTRATION (OSHA)

29 CFR 1910 - Occupational Safety and Health Standards.

(Application for copies should be addressed to the Superintendent of Documents, U. S. Government Printing Office, Washington, DC 20402-0001.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:38Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, handbooks, drawings, publications, and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contract activity.)

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI B11.2 - Hydraulic Presses - Safety Requirements for the Construction, Care, and Use. (DOD adopted)

(Application for copies should be addressed to the American National Standards Institute, ATTN: Sales Dept., 1430 Broadway, New York, NY 10018-3363.)

JOINT INDUSTRIAL COUNCIL (JIC)

JIC H-1 - Hydraulic Standards for Industrial Equipment and General Purpose Machine Tools.

(Application for copies should be addressed to the Joint Industrial Council, c/o The National Tool Builders Association, 7901 WestPark Drive, McLean, VA 22101-4269.)

NATIONAL ELECTRICAL MANUFACTURERS' ASSOCIATION (NEMA)

NEMA MG 1 - Motors and Generators. (DOD adopted)

(Application for copies should be addressed to the National Electrical Manufacturers' Association, 2101 L Street, N.W., Washington, DC 20037-1580.)

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 79 - Electrical Standard for Industrial Machinery. (DOD Adopted)

(Application for copies should be addressed to the National Fire Protection Association, Batterymarch park, Quincy, MA 02269-9101.)

(Non-Govermnent standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:38Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), one complete press shall be subjected to first article inspection (see 6.4) in accordance with 4.4.

3.2 Design. The swaging press shall be new (not a prototype) and one of the manufacturer's current production models capable of swaging metal fittings on wire rope in accordance with the requirements herein. The press shall include all components, parts, and features necessary to meet the performance requirements specified herein. The press shall be of the scissor or alligator type design with provisions in the jaws for installing dies for the swaging process.

3.2.1 Measuring and indicating device calibration. Measuring and indicating devices shall be graduated in inch-pound (see 6.5.1) , metric (see 6.5.2) , or dual (inch-pound and metric) units as specified by the procuring activity (See 6.2). Regardless of the measurement system used, all measuring and indicating devices on the machine shall be graduated in the same system.

3.2.2 Reclaimed materials. The press may contain reclaimed materials to the maximum extent possible provided such materials will not jeopardize the intended use, performance, or-design life of the press. Reclaimed materials shall have been collected or recovered from solid waste and reprocessed to become a source of raw materials, as opposed to virgin raw materials. None of the above shall be interpret to mean that the use of used, rebuilt, or remanufactured end products are allowed under this specification.

3.2.3 Energy efficiency The press and its components that directly consume energy in normal operation shall be designed and constructed for energy efficiency in accordance with the developments available within the industry.

3.2.4 Controls. All hydraulic operating controls shall be located convenient to the operator's work station.

3.2.5 Safety and health requirements. All parts, components, mechanisms, and assemblies furnished on the press, whether or not specifically required herein, shall conform with all requirements of 29 CFR 1910 and ANSI B11.2. If a conflict arises between 29 CFR 1910 and B11.2, 29 CFR 1910 shall apply. Additional safety and health requirements shall be as specified in detail (see 6.2). Covers, guards, or other safety devices normally furnished as standard on the manufacturer's commercial press supplied to the commercial market shall be provided for the point of operation and all other parts of the press that present safety hazards. Additional guarding dependent on workpiece size and configuration shall be provided when specified and fully described by the procuring activity (see 6.2).

3.2.6 Mercury restriction. The press shall not contain mercury or mercury compounds nor be exposed to free mercury during manufacture.

3.2.7 Asbestos restriction. Asbestos and materials containing asbestos shall not be used on or in the press.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:38Z
Check the source to verify that this is the current version before use.

3.2.8 Environmental protection. During the manufacture, operation, service, transportation, or storage of the press, and its components materials hazardous to the ecological system as prohibited by Federal, state, or local statutes in effect on the date of the contract shall not be used or emitted.

3.2.9 Lubrication. Means shall be provided to ensure lubrication for all moving parts. Each lubricant reservoir shall have means for determining fluid level. All oil holes, grease fittings, and filler caps shall be accessible.

3.2.10 Interchangeability. To provide for replacement of worn parts, all parts shall be manufactured to definite dimensions and tolerances that will permit installation of replacement parts without modification of the part or machine. All replacement parts shall be interchangeable with their respective original parts, and fit/function with mating components.

3.3 Construction. The press shall be constructed of parts which are new, without defects, and free of repairs. The structure shall withstand all forces encountered during swaging operations to its maximum rating and capacity without permanent distortion, or failure.

3.3.1 Castings and forgings. All castings and forgings shall be free of defects, scale, and mismatching. No processes such as welding, peening, plugging, or filling with solder or paste shall be used for reclaiming any defective part. Such processes may be used only for enhancing surface finish and appearance.

3.3.2 Surfaces. All surfaces shall be clean and free of harmful or extraneous materials. All edges shall be either rounded or beveled unless sharpness is required to perform a necessary function. Except as otherwise specified herein, the condition and finish of all surfaces shall be in accordance with the manufacturer's commercial practice.

3.3.3 Welding, brazing, or soldering. Welding, brazing, or soldering shall be employed only where specified in the original design. None of these operations shall be employed as a repair measure for any defective part.

3.3.4 Painting. Unless otherwise specified (see 6.2), the press shall be painted in accordance with the manufacturer's commercial practice and color.

3.3.5 Threads. All threaded parts used on the press and its related attachments and accessories shall conform to FED-STD-H28 and the applicable "Detailed Standard" section referenced therein.

3.3.6 Electromagnetic interference control. When specified (see 6.2), equipment furnished under this specification shall comply with MIL-STD-461. The equipment and subsystem class and the emission and susceptibility requirements shall be as specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:38Z
Check the source to verify that this is the current version before use.

3.4 Components.

3.4.1 Base and rocker. The base and rocker shall be of cast iron or cast steel and of the strength to withstand the maximum rated capacity of the press without failure or damage to the press or press components. The base and rocker shall be provided with holes for installing pins at the pivot points of the press. provisions for securing a hydraulic cylinder shall be provided in the base. Means for connecting the base, rocker, and hydraulic cylinder shall be integral of the press. The jaw portion of the rocker and base shall be machined providing a smooth flat surface for mounting a die plate.

3.4.2 Hydraulic system. The hydraulic system shall consist of a hydraulic pump, a hydraulic cylinder complete with piston, fittings, necessary piping, hoses and control valves. A pressure relief valve, preset in accordance with the manufacturer's recommended pressure shall be provided. Means shall be provided to prevent extension of the piston shaft beyond its normal limit. The hydraulic system shall meet or exceed the requirements of JIC-H-1.

3.4.2.1. Hydraulic pump assembly. The hydraulic pump assembly shall provide the pressure to comply with the requirements specified herein.

3.4.2.2 Filtration system. The fluid filtration system shall provide clean fluid to the hydraulic system. The type filter used shall be the manufacturer's standard type filter.

3.4.2.3 Fluid reservoir. The fluid reservoir shall be designed to be filled not less than 1-1/4 times the volume required to fill the hydraulic System l The reservoir shall have a cleanout opening, a means for draining fluid, a filler strainer, and a means for determining fluid level.

3.4.3 Die mounting plates. The press shall have the necessary holes, slots, and guides for mounting die plates to the upper and lower jaws. The die mounting plates shall have provisions for mounting die clamps. The mounting plates and die clamps shall have means for securing and aligning the swaging dies.

3.4.4 Electrical requirements. The electrical system shall be wired to conform to NFPA 79. Unless otherwise specified (see 6.2), each press shall be wired to operate on dual 3 phase, 60 Hertz (Hz), 230/460 volts. Conversion from one voltage to the other shall be accomplished by reconnection of existing components. The press shall be initially wired as specified (see 6.2).

3.4.4.1 Motors. Motors shall be rated for continuous duty and shall have ball or roller bearings of the scald and permanently lubricated type. Unless otherwise specified (see 6.2) , each motor shall have a dripproof enclosure.

3.4.5 Worklight. When specified (see 6.2), a worklight shall be provided. The light shall have a protective shield, an on-off switch, and shall be adjustable to reflect maximum light on the work area.

Source: https://assist.dla.mil -- Downloaded: 202610-23T04:38Z
Check the source to verify that this is the current version before use.

3.4.6 Hour meter. When specified (see 6.2), the press shall be equipped with an hour meter. The hour meter shall be installed to display accumulated operating time of the main drive motor. The meter shall be of the nonresetting type and shall have a range of 0 to 9,999 hours in increments of not greater than 1 hour. The meter shall be sealed to prevent the entrance of dust and moisture and shall be mounted to withstand shock and vibration generated by the press.

3.5 Size and capacity. Unless otherwise specified (see 6.2), the size and capacity of the press shall meet the requirements of table I for the size specified. Machine size and capacity shall be not less than the stated requirements of the size ordered.

TABLE I. Sizes and capacities.

Sizes	1	2	3	4	5	6
Capacity (tons)	200	350	500	800	1000	1200
Wire rope dia.	3/4	1	1-1/2	2	2	2-1/2
Jaw opening, (inches)	1	2-3/4	3	4-1/2	6	6

3.5.1 physical size limitations. When specified (see 6.2), the physical size of the machine shall be limited. The physical size of the machine shall not exceed the height, width, and length restrictions specified by the procuring activity to ensure the machine will fit in its future operating location.

3.6 Performance. The press shall be capable of swaging stainless steel, aluminum, and carbon steel fittings to wire rope. The swaged fittings shall withstand a pulling form capable of breaking the wire rope without damage to the swaged assembly.

3.7 Standard equipment. All standard equipment normally furnished with the manufacturer's commercial press shall be furnished.

3.8 Optional equipment. Optional equipment shall be furnished as specified and fully described (see 6.2). The optional equipment provided shall be functional without requiring modification of the equipment or machine.

3.9 Repair parts. Required repair parts shall be furnished as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 202640-23T04:38Z
Check the source to verify that this is the current version before use.

3.10 Marking on instruments, control panels, charts, and plates. All words on the machine including all instruments, control panels, control units, charts, plates, and related attachments shall be in the English language. Characters shall be permanently marked in boldface on a contrasting background. All plates shall be corrosion resistant.

3.10.1 Lubrication plate or chart. When specified (see 6.2), a lubrication plate or chart shall be attached to each press. If a chart is furnished, it shall be placed in a transparent plastic folder, or permanently sealed between clear plastic sheets. unless otherwise specified (see 6.2), the information provided on the chart or plate shall be as listed below.

Points of lubricant application
Type of lubricant
Servicing interval
Military or Federal specification for each lubricant (if applicable)

3.10.2 Nameplate. A nameplate shall be securely attached to each press. Unless otherwise specified (see 6.2), the nameplate shall contain the information listed below.

Nomenclature
Manufacturer's name
Manufacturer's model designation
Manufacturer's serial number
Power input (volts, total amps, phase, frequency)
Amp rating of largest motor
Short circuit/over-current protection rating
Contract number or order number
National stock number or plant equipment code
Date of manufacture

3.10.3 Hydraulic fluid requipments plate. When specified (see 6.2), a hydraulic fluid requirements plate shall be attached to the machine at the hydraulic reservoir fill point. Unless otherwise specified (see 6.2), the plate shall contain the following information:

Type of fluid (SAE number or military or Federal specification number)
Type of filter

3.11 Workmanship. workmanship of the press and its accessories shall meet all requirements specified herein.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:38Z
Check the source to verify that this is the current version before use.

disapproved by the Government. The Government reserves the right to perform any inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspections set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4).

b. Quality conformance inspection {see 4.5).

4.3 Inspection conditions. Unless otherwise specified (see 6.2), all inspections shall be performed in accordance with the test conditions specified in 4.7.1.

4.4 First article inspection. When a first article inspection is required, it shall be applied to the first article submittd in accordance with 3.1. Unless otherwise specified (see 6.2), first article inspection shall consist of the examination in 4.6 and all tests in 4.7. The press shall pass the examination and all tests to be accepted.

4.5 Quality conformance inspection. Quality conformance inspection shall be applied to each press prior to being offered for acceptance under the contract. Unless otherwise specified (see 6.2), quality conformance inspection shall consist of the examination in 4.6, the tests in 4.7, and the inspection in 4.8. The machine shall pass the examination, all tests, and the inspection to be accepted.

4.6 Examination. Each press shall be examined to determine compliance with all requirements of this specification.

4.7 Tests.

4.7.1 Test conditions. All tests shall be performed in an indoor facility with ambient conditions of 41° to 104° Fahrenheit (F) and 20 to 95 percent relative humidity.

4.7.2 Operational test. Each press shall be operated at no load for not less than one-half hour. Proper operation of all controls, motors, adjusting mechanisms, and accessories shall be verified during the trial period.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:38Z
Check the source to verify that this is the current version before use.

4.7.3 Performance tests. Unless otherwise specified (see 6.2), the wire rope diameter used for testing press sizes 1, 2 and 3 shall be 5/8 inches. The wire rope diameter for testing press sizes 4, 5 and 6 shall be 1-3/8 inches. The type fittings used for the test shall be as specified by the procuring activity (see 6.2). One type fitting of stainless steel, one of the aluminum, and one of carbon steel shall be selected for the test. After the swaging operation, each swaged assembly shall be subjected to a pull destruction test. In this test, the wire rope shall break without damage to the fitting. All performance tests shall be completed without making any adjustments to or performing any maintenance on the machine.

4.7.4 Electromagnetic interference control test. Equipment requiring electromagnetic Interference control shall be tested for compliance with 3.3.6 using the procedures given in MIL-STD-462.

4.8 Packaging inspection. packaging of each item shall be inspected to determine compliance with the requirements of section 5.

5. PACKAGING

5.1 packaging requirements. The requirments for packaging shall be in accordance with MIL-M-18058.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The press is intended to swage metal fittings onto wire rope.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Size required (see 1.2).

c. Issue of DODISS to be cited in the solicitation and, if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).

d. First article, if required (see 3.1).

e. Specify system of units for measuring and indicating devices (See 3.2.1).

f. Additional safety and health requirements, if required (see 3.2.5).

g. Specify configuration of additional point-of-operation guarding, if required (see 3.2.5).

h. Painting, if different (see 3.3.4.).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:38Z
Check the source to verify that this is the current version before use.

i. If electromagnetic interference control is required, specify the equipment and subsystem class and the emission and susceptibility required (see 3.3.6).

j. Electrical requirements, if different (see 3.4.4).

k. Voltage requirements, if different (see 3.4.4).

l. Motors, if different (see 3.4.4.1).

m. Worklight, if required (see 3.4.5).

n. Hour meter, if required (see 3.4.6).

o. Size and capacity, if different (see 3.5).

p. Specify physical size limitation, if required (see 3.5.1).

q. Specify and fully describe optional equipment, if required (See 3.8).

r. Specify applicable repair parts, if required (see 3.9).

s. Lubrication plate, if required (see 3.10.1).

t. Specify information to be provided on lubrication plate if different (see 3.10.1).

u. Nameplate, if different (see 3.10.2).

v. Hydraulic fluid requirements plate, if different (see 3.10.3).

w. Inspection conditions, if different (see 4.3).

x. First article inspection, if different (see 4.4).

y. Quality conformance inspection, if different (4.5).

z. Wire diameter, if different (see 4.7.3).

aa. Type of fittings required for performance test (see 4.7.3).

6.3 Consideration of data requirements. The following data requirements should be considered when this specification is applied on a contract. The applicable Data Item Descriptions (DIDs) should be reviewed in conjunction with the specific acquisition to ensure that only essential data are requested\provided and that the DIDs are tailored to reflect the requirements of the specification acquisition.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:38Z
Check the source to verify that this is the current version before use.

TO ensure correct contractual application of the data requirements, a Contract Data Requirements List (DD Form 1423) must be prepared to obtain the data, except where DOD FAR Supplement 27.475-1 exempts the requirement for a DD Form 1423.

Reference Paragraph	DID Number	DID Title	Suggested Tailoring
N/A	DI-TMSS-80527	Commercial Off-The-Shelf (COTS) Manuals	Require all data be in the English Language
N/A	DI-TMSS-80528	Supplemental Data for Commercial Off-The-Shelf (COTS) Manuals	Require all data be in the English Language

The above DIDs were those cleared as of the date of this specification. The current issue of DOD 5010.12-L, Acquisition Management Systems and Data Requirements Control List (AMSDL), must be researched to ensure that only current, cleared DIDs are cited on the DD Form 1423.

6.3.1 Technical data. It should be specified in the remarks section of the DD Form 1423 that all technical data furnished should be written in the English language.

6.4 First article. When first article inspection is required, the contracting officer should provide specific guidance to offerors whether the its(s) should be a first article sample, a first production its, or a stardard production item from the contractor's current inventory and the number of items to be tested as specified in 4.4. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract.

6.5 Definitions.

6.5.1 Inch-pound units. Inch-pound units are a system of measures based on the yard and pound commonly used in the United States of America and defined by the National Institute of Standards and Technology. Inch-pound units having the same names in other countries may differ in magnitude.

6.5.2 Metric units. Metric units are a system of basic measures defined by the International System of Units based on "Le Systeme International d'Unites (SI)," of the International Bureau of Weights and Measures. These units are described in ASTM E 380 and IEEE 268 (MIL-STD-961).

Source: https://assist.dla.mil - Downloaded: 2026-10-23T04:38Z
Check the source to verify that this is the current version before use.

6.6 Measurement system. In this specification, all measurements, dimensions, sizes, and capacities are given in inch-pound units. These measurements may be converted to metric units through the use of the conversion factors and methods specified in FED-STD-376.

6.7 Cross-reference of classification. Classification changes from the previous issue of this specification are as follows:

MIL-P-80104C	MIL-P-80104D
Size - 200	Size - 1
	Size - 2 (New size)
Size - 500	Size - 3
Size - 650	Deletd
Size - 800	Size - 4
Size - 1000	Size - 5
Size - 1200	Size - 6
Size - 3000	Deleted

6.8 Changes from previous issues. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.


6.9 Safety and health requirements. The 29 CFR 1910 limits only the total hazard level (noise, radiation, electromagnetic emissions, noxious vapors, air contaminants and heat) of the environment in which a machine will operate. It does not limit the hazard level of individual machines in an operating environment. The procuring activity should analyze the existing hazard level in the proposed operating environment and specify additional requirements necessary to integrate this new machine into its future environment.

6.10 Training. Training required by the procuring activity should be provided as specified in the contract.

6.11 Warranty. Warranty requirements should be as specified by the procuring activity in the contract.

6.12 Inspection location. The contractor should identify in his response to the solicitation the location where inspection and tests are to be performed.

6.13 Part or Identifying Number (PIN). The PIN to be used for presses acquired to this specification are created as follows:

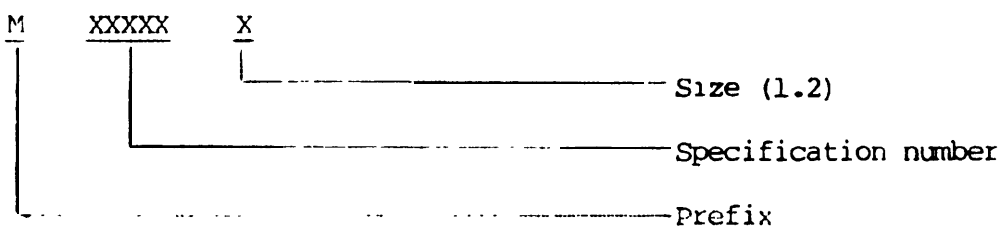

Source: https://assist.dla.mil - Downloaded: 2026-10-23T04:38Z
Check the source to verify that this is the current version before use.

6.14 Subject term (key word) listing.

Hydraulic
Press
Swage

Custodians:
Navy - SH
Air Force - 99

Review activities:
Air Force - 84
DLA - GS

User activity:
Navy-As

Preparing Activity:
DLA - IP

Project (3442-0055)

Source: https://assist.dla.mil - Downloaded: 2026-10-23T04:38Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revisi letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization waive any portion of the referenced document(s) or to amend contractual requirements

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-P-80104D	2. DOCUMENT DATE (YYMMDD) 900327

3. DOCUMENT TITLE
Press, Swaging, Wire Rope Fittings, Hydraulically Powered

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

REASON FOR RECOMMENDATION

SUBMITTER		
5a. NAME (Last, First, Middle Initial)	5b. ORGANIZATION	
5c. ADDRESS (Include Zip Code)	5d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

PREPARING ACTIVITY		
8a. NAME ense Industrial Plant Equipment Center	8b. TELEPHONE (Include Area Code) (1) Commercial (901)775-6247	(2) AUTOVON (AV)683-6247
8c. ADDRESS (Include Zip Code) 2163 Airways Blvd. Memphis, TN 38114-5051	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026-03-04 13:04:38Z
Check the source to verify that this is the current version before use.