INCH-POUND

MIL-W-80075C
16 October 1989
SUPERSEDING
MIL-W-80075B
31 January 1977

MILITARY SPECIFICATION

WELDING POWER SOURCE, ARC, DC, TRANSFORMER-RECTIFIER, CONSTANT CURRENT, WITH EIGHT CONTROL MODULES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers direct current (DC), transformer-rectifier, constant current arc welding power sources capable of supplying welding power simultaneously to eight control modules with equipment and accessories specified herein. All requirements specified in this document are the minimum requirements of the Government and are not intended to limit the manufacturer in machine design or performance.

1.2 Classification. Unless otherwise specified (see 6.2), the control modules shall be the following size.

Size	Rating, amperes, per module (at 60 percent duty cycle)
200	200

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Industrial Plant Equipment Center, ATTN: DIPEC-SSM, 2163 Airways Boulevard, Memphis, Tennessee 38114-5051, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 3431

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:36Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

MILITARY

MIL-W-45562 - Welding and Soldering Equipment, Supplies and Accessories, Packaging of.

STANDARDS

FEDERAL

FED-STD-H28 - Screw Thread Standards for Federal Services.

(Unless otherwise indicated, copies of Federal and military specifications, standards, and handbooks are available from the Naval Publications and Forms Center, (ATTN: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

CODE OF FEDERAL REGULATIONS (CFR)

U. S. DEPARTMENT OF LABOR, OCCUPATIONAL SAFETY AND HEALTH ADMINISTRATION (OSHA)

29 CFR 1910 - Occupational Safety and Health Standards.

(Application for copies should be addressed to the Superintendent of Documents, U. S. Government Printing Office, Washington, DC 20402-0001.)

(Copies of specifications, standards, handbooks, drawings, publications, and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the Solicitation (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:36Z
Check the source to verify that this is the current version before use.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI Z49.1 - Safety in Welding and Cutting. (DOD adopted)

(Application for copies should be addressed to the American National Standards Institute, ATTN: Sales Dept., 1430 Broadway, New York, NY 10018-3363.)

NATIONAL ELECTRICAL MANUFACTURERS' ASSOCIATION (NEMA)

NEMA EW 1 - Electric Arc Welding Apparatus. (DOD adopted)

(Application for copies should be addressed to the National Electrical Manufacturers' Association, 2101 L Street, N.W., Washington, DC 20037-1580.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), one complete power source shall be subjected to first article inspection (see 6.4) in accordance with 4.4.

3.2 Design. The welding power source shall be new (not a prototype) and one of the manufacturer's current production models. Each welding power source shall consist of eight welding control modules housed in a common enclosure, powered by a single main transformer. The eight modules shall be independent of each other and shall furnish constant current welding power to eight operators. All parts subject to wear, breakage, or distortion shall be accessible for adjustment replacement or repair.

3.2.1 Reclaimed materials. The power source may contain reclaimed materials to the maximum extent possible provided such materials will not jeopardize the intended use, performance, or design life of the power source. Reclaimed materials shall have been collected or recovered from solid waste and reprocessed to become a source of raw materials, as opposed to virgin raw materials. None of the above shall be interpreted to mean that the use of used, remanufactured, or rebuilt products are allowed under this specification.

3.2.2 Energy efficiency. The welding power source and its components that directly consume energy in normal operation shall be designed and constructed for energy efficiency as governed by the developments available within the industry.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:36Z
Check the source to verify that this is the current version before use.

3.2.3 Safety and health requirements. All parts, components, mechanisms, and assemblies furnished on the welding power source, whether or not specifically required herein, shall conform to all requirements of ANSI 249.1 and OSHA 29 CFR 1910. If a conflict arises between ANSI 249.1 and OSHA 29 CFR 1910, OSHA 29 CFR 1910 shall apply, Additional safety and health requirements shall be as specified (see 6.2). Covers, guards, or other safety devices normally furnished as standard on the manufacturer's commercial power source supplied to the commercial market shall be provided for the point of operation and all other parts of the power source that present safety hazards.

3.2.4 Mercury restriction. The welding power source shall not contain mercury or mercury compounds nor be exposed to free mercury during manufacture.

3.2.5 Asbestos restriction. Asbestos and materials containing asbestos shall not be used on or in the welding power source.

3.2.6 Environmental protection. During the construction of the power source, the manufacturer shall comply with all applicable Federal, state, and local statutes in effect on the date of the contract which regulate the use of materials hazardous to the ecological system. During its operation, the power source shall comply with all applicable Federal statutes in effect on the date of the contract which regulate the emission of hazardous materials to the environment.

3.2.7 Interchangeability. To provide for replacement of worn parts, all parts shall be manufactured to definite dimensions and tolerances that will permit installation of replacement parts without modification of the part or power source.

3.3 Construction. The power source shall be constructed of parts which are new, without defects, and free of repairs. The power source shall withstand operation to its maximum rating and capacity without permanent distortion or failure.

3.3.1 Fastening devices. All fasteners shall be installed to prevent change of tightness. Fastening devices subject to removal or adjustment shall not be permanently installed.

3.3.2 Surfaces. All surfaces shall be clean and free of harmful or extraneous materials. All edges shall be either rounded or beveled unless sharpness is required to perform a necessary function. Except as otherwise specified herein, the condition and finish of all surfaces shall be in accordance with the manufacturer's commercial practice.

3.3.3 Welding brazing, or soldering. Welding, brazing, or soldering shall be employed only where specified in the original design. None of these operations shall be employed as a repair measure for any defective part.

3.3.4 Painting. Unless otherwise specified (see 6.2), the welding power source shall be painted in accordance with the manufacturer's commercial practice and color.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:36Z
Check the source to verify that this is the current version before use.

3.3.5 Threads. All threaded parts used on the welding power source and its related attachments and accessories shall conform to FED-STD-H28 and the applicable "Detailed Standard" section referenced therein.

3.3.6 Portability. The power source shall be mounted on a base and provided with means for lifting at a designated point by crane or hoisting mechanism equipped with a hook, shackle, or clevis or by a fork lift truck. The lifting device shall be capable of supporting 2-1/2 times the weight of the power source.

3.3.7 Corrosion protection. Corrosion protection of all metal components shall conform to the requirements of NEMA EW 1. The power source shall be designed and equipped for operation and storage outside in a humid, salt and dust laden shipyard environment, including adverse weather conditions and wind driven rain. All external and internal surfaces, internal components, wiring, and connections shall be protected to withstand extreme environmental conditions.

3.4 Power source components and requirements.

3.4.1 Welding rating and performance. The welding power source shall be designed for any direct current welding operation using straight and reverse polarity. The power source shall be rated at 800 amperes at 40 volts at 100 percent duty cycle. When properly connected to the power source, each of the eight modules shall be rated at 200 amperes at 40 volts at 60 percent duty cycle using either straight or reverse polarity. The welding current range for each single module shall be 35 to 300 amperes. The power source shall be designed to allow an operator to strike and maintain a stable arc using electrodes of any size and type within the volt/ampere limits of the power source. The welding arc shall be continuous without loss of arc more than once in 6 inches of weld. Welding operation from one module shall not cause readjustment of control to other modules.

3.4.2 Enclosure. The power source components shall be securely mounted within a rigid, all weather, metal enclosure conforming to the requirements of NEMA EW 1. The ventilation openings shall be designed to prevent the entrance of rodents and trash. Access to the primary and secondary terminals, transformer taps, and diode bridges shall be provided. Access openings shall be easily removable for inspection, cleaning, and servicing. Inlet and outlet electrical connections shall be clearly and permanently marked.

3.4.3 Transformer. The transformer(s) shall produce a continuous current which, when rectified, shall have a direct current rating as specified in 3.4.1. The transformer(s) shall be of the laminated core or shell type. The insulation system of primary and secondary transformer coils shall conform to the requirements of NEMA EW1. The transformer(s) shall be rigidly mounted within the enclosure. All terminals shall be permanently marked.

3.4.4 Rectifier. A full wave semiconductor diode rectifier shall be provided. All components shall be of suitable size and design for the intended service. Surge suppression protection shall be provided with capacity to reduce any transient voltage peaks which would cause component failure. Components subject to failure shall be easily removable to permit replacement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:36Z
Check the source to verify that this is the current version before use.

3.4.5 Modules. Each welding power source shall have eight modules (one module for each welding station). The modules shall be complete welding units or separate control units connected to the transformer. The separate control units shall have rectifiers, current stabilizing, and current controlling circuitry. Each module shall have a panel with connections for secondary welding leads, a remote control receptacle, devices for current adjustments, and provisions for either straight or reverse polarity. The connections for welding cables shall be installed to prevent accidental contact by operators.

3.4.6 Controls. All operating controls shall be located convenient to the operator's welding stations. When specified (see 6.2), remote hand amperage controls complete with at least 20 feet of cord and a plug shall be provided.

3.4.7 Insulation. The insulation used shall comply with NEMA EW 1.

3.4.8 Ventilation system. The welding power sources shall be equipped with cooling fan(s) of suitable capacity to provide cooling of all components. The fan assembly shall be rigidly mounted to the frame to withstand vibrations. Fan blades shall not fall under normal operating conditions. Each fan motor(s) shall have a switch to initiate the shutdown of the unit upon failure or slowdown of the fan motor(s). When specified (see 6.2), automatic fan time control shall be provided to turn the fan(s) on when an arc is struck and off 3 to 5 minutes after the arc is broken.

3.4.9 Temperature rise. The maximum allowable temperature rise of various insulated parts of the power source shall be in accordance with NEMA EW 1.

3.4.10 Automatic failure protection. The primary line voltage feeding the system shall be automatically removed in the event of an overload, excessive temperature rise, or component failure. All control circuits shall be protected by fuses or circuit breakers. All fuses and circuit breakers shall be accessible for replacement or manual resetting.

3.4.11 Electrical system. Unless otherwise specified (see 6.2), the welding power source shall operate from 230/460 volt, 60 Hertz (Hz), 3-phase alternating current (AC) input power. Unless otherwise specified (see 6.2), the power source shall be initially wired for operation on 460 volts. The power source shall be wired to conform to NEMA EW 1.

3.4.11.1 Ground connections. Each power source shall have a ground connection for system grounding. Common grounding connections of all modules shall also be provided.

3.4.11.2 Auxiliary power. Each welding power source shall have an auxiliary 115-volt, AC duplex receptacle located on the control panel for job site power for lights, hand tools, and other accessories.

3.4.11.3 Open circuit voltage. The open circuit voltage shall be in accordance with NEMA EW 1 for DC transformer-rectifier welding power sources.

3.4.12 Parallel operation. Individual modules shall operate in parallel when connected according to the manufacturer's instructions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:36Z
Check the source to verify that this is the current version before use.

3.5 Standard equipment. All standard equipment normally provided with the manufacturer's commercial power source shall be furnished.

3.6 Optional equipment. Optional equipment shall be furnished as specified and fully described (see 6.2).

3.7 Repair parts. Required repair parts shall be furnished as specified (see 6.2).

3.8 Marking on instruments, control panels, and plates. All words on instruments, control panels, and plates shall be in the English language. Characters shall permanently marked in boldface on a contrasting background. All plates shall be corrosion resistant.

3.8.1 Nameplate. A nameplate shall be securely attached to each power source. Unless otherwise specified (see 6.2), the nameplate shall provide the information listed below:

Nomenclature
Manufacturer's name
Manufacturer's model designation
Manufacturer's serial number
power input (volts, total amps, phase, frequency)
Contract Number or Order Number
National Stock Number or Plant Equipment Code
Date of manufacture

3.8.2 Diagram of connections. A diagram of connections shall be attached to a readily accessible inside surface of the welding power source. The diagram shall be protected by a coating of transparent material.

3.9 Workmanship. Workmanship of the welding power source and its accessories shall meet all requirements specified herein.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspections set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all

Source: https://assist.dla.mil -- Downloaded: 202610-23T04:36Z
Check the source to verify that this is the current version before use.

requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submissions of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4).

b. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. Unless otherwise specified (see 6.2), all inspections shall be performed in accordance with the test conditions specified in 4.7.1.

4.4 First article inspection. When a first article inspection is required, it shall be applied to the first article submitted in accordance with 3.1. Unless otherwise specified (see 6.2), first article inspection shall consist of the examination in 4.6 and all tests in 4.7. The power source shall pass the first article examination and all tests to be accepted.

4.5 Quality conformance inspection. Quality conformance inspection shall be applied to each item prior to being offered for acceptance under the contract. Unless otherwise specified (see 6.2), quality conformance inspection shall consist of the examination in 4.6, the tests in 4.7.2 and 4.7.3.3, and the inspection in 4.8. The power source shall pass the examination, all tests, and the inspection to be accepted.

4.6 Examination. The welding power source shall be examined to determine compliance with all requirements of this specification.

4.7 Tests.

4.7.1 Test conditions. All tests shall be performed in an indoor facility with ambient conditions of 50° to 104° Fahrenheit and 20 percent to 95 perecent relative humidity.

4.7.2 Operational test. All circuits in the power source shall be energized. Proper operation of all controls, motors, adjusting mechanisms, and accessories and optional equipment shall be verified without performing any actual welding.

4.7.3 Performance tests. Each power source shall be capable of performing all tests specified herein. Where applicable, tests shall follow the procedures of NEMA EW 1. At the option of the procuring activity, each power source shall be subjected to tests in accordance with specified requirements designated by the procuring activity in lieu of, or in addition to, the following tests (see 6.2). All performance tests shall be completed without performing any maintenance on the power source.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:36Z
Check the source to verify that this is the current version before use.

4.7.3.1 Rough handling test. The power source shall be subjected to and pass jerk and drop tests conforming to NEMA EW 1. When the rough handling test is required, it shall be performed prior to performing any other test(s).

4.7,3.2 High potential test. The welding power source shall be subjected to and pass a high potential test conforming to NEMA EW 1.

4.7.3.3 Maximum current output test. The power source shall be tested to determine that the maximum current output meets the requirements for the maximum rated current output for the power source given in 3.4.1.

4.7.3.4 Dielectric tests. Dielectric tests shall be performed in accordance with NEMA EN 1.

4.7.3.5 Overload tests. With the equipment operating in a thermally stabilized condition at rated load current, a 200-percent-of-rated-load current shall be applied. The power source shall comply with the requirements of 3.4.10.

4.7.3.6 Temperature test. The power source shall be subjected to and pass temperature rise tests conforming to NEMA EW 1.

4.7.3.7 Overtemperature protection test. With the equipment operating in a thermally stabilized condition at rated load current and with enclosure panels in place, the fan motor shall be disconnected to determine that the thermostatic protection device meets the requirements of 3.4.10.

4.7.3.8 Welding test. Weld deposits shall be made using stick electrodes of the sizes that will test the minimum and maximum current ratings of the power source. Eight, 7-inch long weld beads shall be made, one from each of the eight stations. Welding from each station shall be conducted while simulating operation of the remaining modules, with resistance loading of stations. Eight simultaneous welds may be made instead of resistance loading, if desired. With two stations connected in parallel, a weld bead shall be made using 150 percent of rated current of one station. Evidence of difficulty in establishing or maintaining an arc during the welding shall constitute failure of test and rejection of the welding power source.

4.8 Packaging inspection. Packaging of each item shall be inspected to determine compliance with the requirements of section 5.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-W-45562.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:36Z
Check the source to verify that this is the current version before use.

6.1 Intended use. The welding power sources covered by this specification are intended for shielded metal arc welding (SMAW) (stick welding) and gas tungsten arc welding (GTAW) processes requiring up to eight operators simultaneously welding from the same power source using either straight or reverse polarity.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Size required, if different (see 1.2).

c. Issue of DODISS to be cited in the solicitation and, if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).

d. First article, if required (see 3.1).

e. Additional safety and health requirements, if required (see 3.2.3).

f. Painting, if different (see 3.3.4).

g. Remote hand controls, if required (see 3.4.6).

h. Automatic fan time control, if required (see 3.4.8).

i. Electrical system, if different (see 3.4.11).

j. Specify initial input voltage, if different (see 3.4.11).

k. Specify and describe optional equipment, if required (see 3.6).

1. Specify applicable repair parts, if required (see 3.7).

m. Nameplate, if different (see 3.8.1).

n. Inspection conditions, if different (see 4.3).

o. First article inspection, if different (see 4.4).

p. Quality conformance Inspection, if different (see 4.5).

q. Tests, if different (see 4.7.3).

6.3 Consideration of data requirements. The following data requirements should be considered when this specification is applied on a contract. The applicable Data Item Descriptions (DIDs) should be reviewed in conjunction with the specific acquisition to ensure that only essential data are requested/provided and that the DIDs are tailored to reflect the requirements of the specific acquisition. To ensure correct contractual application of the data requirements, a Contract Data Requirements List (DD Form 1423) must be prepared to obtain the data, except where DOD FAR Supplement 27.475-1 exempts

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:36Z
Check the source to verify that this is the current version before use.

Reference Paragraph	DID Number	DID Title	Suggested Tailoring
.	.	.	.
.	.		.

The above DIDs were those cleared as of the date of this specification. The current issue of DOD 5010.12-L, Acquisition Managernent Systems and Data Requirements Control List (AMSDL), must be researched to ensure that only current, cleared DIDs are cited on the DD From 1423.

6.3.1 Technical data. It should be specified in the "Remarks" section of the DD Form 1423 that all technical data ordered shall be written in the English language.

6.4 First article. When first article inspection is required, the contracting officer should provide specific guidance to offerors whether the item(s) should be a first article sample, a first production item, or a standard production item from the contractor's current inventory and the number of items to be tested as specified in 4.4. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results, and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract. Bidders should not submit alternate bids unless specifically requested to do so in the solicitation.

6.5 Definitions.

6.5.1 Inch-pound units. Inch-pound units are a system of measures based on the yard and pound commonly used in the United States of America and defined by the National Bureau of Standards. Inch-pound units having the same names in other countries may differ in magnitude.

6.5.2 Metric units. Metric units are a system of basic measures defined by the International System of Units based on "Le Systeme International D'Unites (SI)," of the International Bureau of Weights and Measures. These units are described in ASTM E 380 and IEEE 268 (MIL-STD-961).

6.6 Measurement system. In this specification, all measurements, dimensions, sizes, and capacities are given in inch-pound units. These measurements may be converted to metric units through the use of the conversion factors and methods specified in FED-STD-376.

6.7 Cross-reference of classification changes. Power source classification changes from the previous issue of this specification are as follows:

MIL-W-80075B	MIL-W-80075C
Size 8-200	Size 200
Size 8-400	Deleted

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:36Z
Check the source to verify that this is the current version before use.

6.8 Changes from previous issues. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.


6.9 Safety and health requirements. Regulation 29 CFR 1910 limits only the total hazard level (noise, radiation, electromagnetic emissions, noxious vapors, air contaminants, and heat) of the environment In which a machine will operate. It does not limit the hazard level of individual machines in an operating environment. The procuring activity should analyze the existing hazard level in the proposed operating environment and specify additional requirements necessary to integrate this new power source into Its future environment.

6.10 Training. Training required by the procuring activity should be provided as specified in the contract.

6.11 Warranty. Warranty requirements should be as specified by the procuring activity in the contract.

6.12 Inspection location. The contractor should identify in his response to the solicitation the location where inspection and tests are to be performed.

6.13 Part or identifying number (PIN). The PIN to be used for power sources acquired to this specification are created as follows:

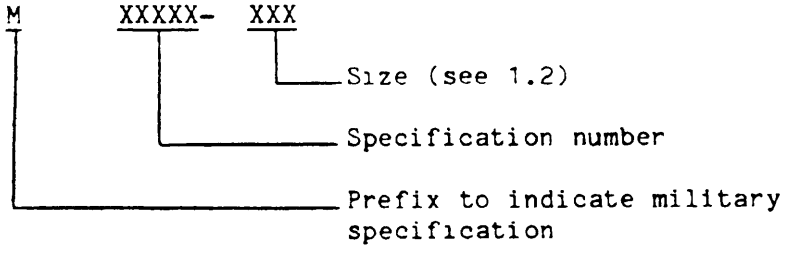

Custodians:
Army - AL
Navy - SH
Air Force - 99

Preparing activity:
DLA - IP

Project (3431-0192)

Review activities:
Army - AR
Air Force - 84
DLA - GS

User activities:
Army - AR
Navy - CG, MC, YD, AS
DLA - GS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:36Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-W-80075	Weld Power Source, Arc, DC, Tran-Rect, Constant Current, 8-Op

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil downloaded: 2026-01-23T04:36Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along thu line)

(Fold along this line)

DEFENSE LOGISTICS AGENCY
Headquarters
Defense Industrial Plant Equipment Center
Memphis, Tennessee 38114-5051

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 4966 WASHINGTON D C
POSTAGE WILL BE PAID BY THE DEFENSE LOGISTICS AGENCY

Commander
Defense Industrial Plant Equipment Center
ATTN: DIPEC-SSM
Memphis, Tennessee 38114-5051

Source: https://assist.dla.mil -- Downloaded: 202610-23T04:36Z
Check the source to verify that this is the current version before use.