
FSC 5925

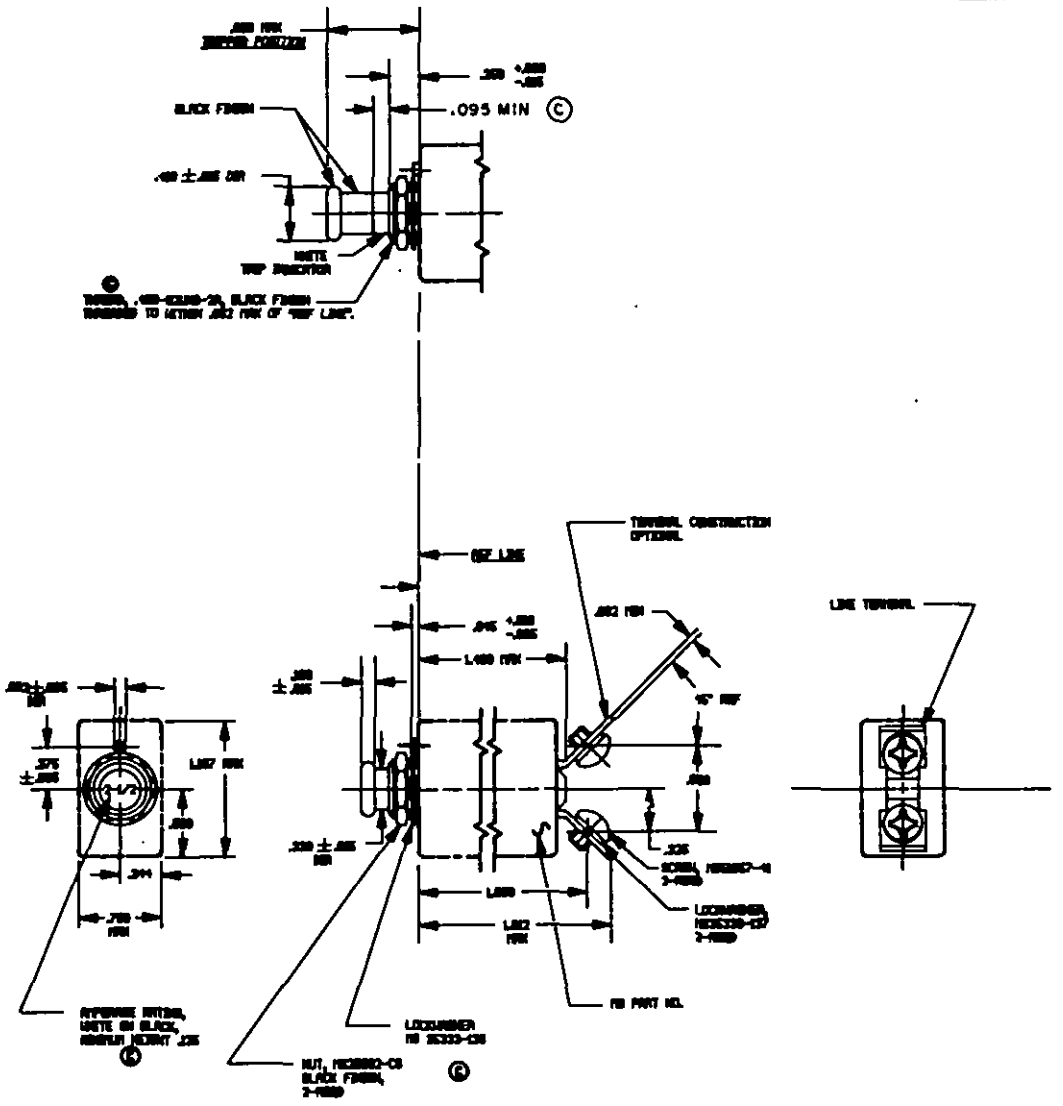

NOTES:

1. DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED. TOLERANCE: DECIMALS ±.031; ANGLES ±2°.
2. PHANTOM LINES INDICATE THAT CONTOUR IS OPTIONAL PROVIDED MAXIMUM DIMENSIONS ARE NOT EXCEEDED.
© 3. RECYCLING TRIP-FREE REQUIREMENTS PER PARAGRAPH 6.4.6.1 OF MIL-C-5809.
4. CERTAIN PROVISIONS OF THIS STANDARD ARE SUBJECT OF INTERNATIONAL AGREEMENT ASC 12/3. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED, THE DEPARTMENTAL CUSTODIANS WILL INFORM THEIR RESPECTIVE DEPARTMENTAL STANDARDIZATION OFFICE SO THAT APPROPRIATE ACTION MAY BE TAKEN RESPECTING THE INTERNATIONAL NATIONAL AGREEMENT CONCERNED.
5. VOLTAGE RATING 115 V, 400 Hz.

INACTIVE FOR NEW DESIGN AFTER 7 DEC 1983.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCE DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

© DENOTES CHANGES

13 JAN 64 · 18 JUL 68 · 7 DEC 83 · 30 NOV 1987

PREPARING ACTIVITY: NAVY - AS; Other than: USAF - 85, ARMY - ER	INTERNATIONAL INTEREST: SEE NOTE 4	TITLE: © CIRCUIT BREAKER, RECYCLING TRIP-FREE, PUSH-PULL, 1/2 THRU 5 AMPERE, TYPE I	MILITARY STANDARD MS22074
MIL-C-5809			SHEET 1 OF 3

AMSC N/A
DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited

PROJECT NO. 5925-0000

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:45Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5925

TABLE I (C)

ELECTRICAL AND MECHANICAL CHARACTERISTICS

DASH NUMBER	NOMINAL CAPACITY AMPERES	VOLTAGE DROP MAX.	WEIGHT MAX. LBS.	OPERATING FORCE MAX. (LBS.) PULLOUT	OPERATING FORCE MAX. (LBS.) RESET	RESISTIVE AC	RESISTIVE DC	ENDURANCE CYCLES INDUCTIVE AC	ENDURANCE CYCLES INDUCTIVE DC	MECHANICAL NO LOAD
1/2	.5	1.21	0.1	8	12	1/ 5,000	2/ 5,000	1/ 2,500 .6 to .7 LAG P.F.	2/ 2,500	5,000
1	1	1.20								
1-1/2	1.5	1.10								
2	2	0.95								
2-1/2	2.5	0.85								
3	3	0.81								
4	4	0.72								
5	5	0.65								

1/ 400 CYCLE 115/200 VOLT SYSTEM. TESTED AT 120 5 VOLTS 380-420 HZ.
2/ 28 VOLT DC SYSTEM. TESTED AT 30 2 VOLTS.

TABLE II (C)

DETAIL CALIBRATION REQUIREMENTS - TRIP TIME IN SECONDS

NOMINAL CAPACITY AMPERES	+25°C PERCENT RATED CURRENT 110	138	150	200	400	600	-40°C PERCENT RATED CURRENT 110	138	+71°C PERCENT RATED CURRENT 110	138
0.5	NO TRIP 1 HOUR MAX	TRIP WITHIN 1 HOUR.	0.9 TO 10.0	0.4 TO 3.0	0.09 TO 0.4	0.04 TO 0.3	MUST HOLD 1 HOUR MIN	MUST TRIP WITHIN 1 HOUR MAX	MUST HOLD 1 HOUR MIN	MUST TRIP WITHIN 1 HOUR MAX
1										
1.5										
2										
2.5										
3										
4			1.8 TO 10.0	0.8 TO 3.6	0.14 TO 0.75	0.055 TO 0.35				
5										

AMBIENT TEMPERATURE TOLERANCE ±2°C.

TABLE III (C)

INTERRUPTING CURRENT (AMPERES) REQUIREMENTS

NOMINAL CAPACITY AMPERES	TEST DESIGNATION PER MIL-C-5809 A	B	C	D	E	F
0.5	1.250	1.250	6.000	6.000	(*)	(*)
1						
1.5						
2						
2.5						
3						
4						
5						

(*) NOT APPLICABLE.

(C) FOR CHANGES SEE SHEET 1

APPROVED 13 JAN 54

P.A.
NAVY — AS
Other Cust
USAF-85
ARMY-ER

INTERNATIONAL INTEREST

TITLE: CIRCUIT BREAKER, RECYCLING, TRIP-FREE, PUSH-PULL, 1/2 THRU 5 AMPERE, TYPE I

MILITARY STANDARD

MS22074

PROCUREMENT SPECIFICATION: MIL-C-5809

SUPERSEDES: AF DWG 67C1807

SHEET 2 OF 3

DD FORM 672-1

PLATE NO. 20000


"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:45Z
Check the source to verify that this is the current version before use.

(B) REQUIREMENTS:

1. THE PART NUMBERS FOR CIRCUIT BREAKER IN ACCORDANCE WITH THIS SPECIFICATION SHALL CONFORM TO THE EXAMPLE BELOW.



2. CIRCUIT BREAKERS SHALL BE RECYCLING AS DEFINED IN MIL-C-5809.

(C) NOTES:

1. DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED. TOLERANCE: DECIMALS ± .031; ANGLES ±2°.
2. PHANTOM LINES INDICATE THAT CONTOUR IS OPTIONAL PROVIDED MAXIMUM DIMENSIONS ARE NOT EXCEEDED.
3. VOLTAGE RATING 115V, 400 Hz.
4. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THE STANDARD SHALL TAKE PRECEDENCE.

* CERTAIN PROVISIONS OF THIS STANDARD ARE SUBJECT OF INTERNATIONAL AGREEMENT ASC 12/3. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED, THE DEPARTMENTAL CUSTODIANS WILL INFORM THEIR RESPECTIVE DEPARTMENTAL STANDARDIZATION OFFICE SO THAT APPROPRIATE ACTION MAY BE TAKEN RESPECTING THE INTERNATIONAL AGREEMENT CONCERNED.

TABLE IV (C)

ENVIRONMENTAL PERFORMANCE	
MAX OPERATING ALTITUDE - FT	65,000
OPERATING AMBIENT TEMP RANGE	-40°C to ±71°C
VIBRATION IN A/W MIL-C-5809	SINE-REQUIRED
SHOCK	25 G, MIL-STD-202, MTHD 213, TST CONDTN J
ACCELERATION	10G

User/Activity information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.

The military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

AMSC N/A 13 JUN 64 FSC 5925 SIZE A SHEET 1

P.A. NAVY — AS Other Cust USAF - 85 ARMY - ER	INTERNATIONAL INTEREST *	TITLE: CIRCUIT BREAKER-RECYCLING TRIP-FREE, 112 THRU 5 AMPERES, TYPE I	MILITARY STANDARD MS22074
PROCUREMENT SPECIFICATION: MIL-C-5809		SUPERSEDES: AF DWG 67C 1807	SHEET 3 OF 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:45Z
Check the source to verify that this is the current version before use.