
FED. SUP CLASS
5305

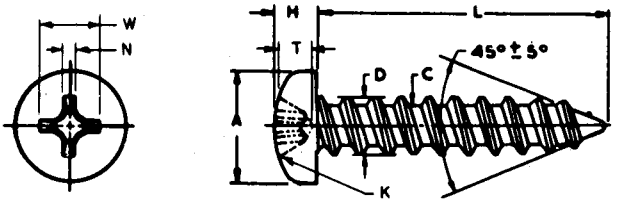

NOMINAL SIZE		4 (.112)	6 (.138)	8 (.164)	10 (.190)	12 (.216)	14 (.242)
THREADS PER INCH		24	18 / 20*	15 / 18*	12 / 16*	11 / 14*	10 / 14*
MAJOR DIAMETER	D MAX	.114	.141	.168	.194	.221	.254
	D MIN	.110	.136	.162	.188	.215	.248
MINOR DIAMETER	C MAX	.083	.102	.123	.133	.162	.185
	C MIN	.078	.096	.116	.126	.155	.178
HEAD DIAMETER	A MAX	.219	.270	.322	.373	.425	.476
	A MIN	.205	.256	.306	.357	.407	.457
HEAD HEIGHT	H MAX	.080	.097	.115	.133	.151	.169
	H MIN	.070	.087	.105	.122	.139	.156
RECESS DIAMETER	W MAX	.122	.166	.182	.199	.259	.281
	W MIN	.109	.153	.169	.186	.246	.268
RECESS DEPTH	T MAX	.078	.091	.108	.124	.141	.161
	T MIN	.060	.066	.082	.100	.115	.135
RECESS WIDTH	N MIN	.019	.028	.030	.031	.034	.036
RADIUS	K	.020	.025	.025	.025	.030	.030
DEPTH OF GAGE PENETRATION	MAX	.071	.080	.097	.113	.124	.144
	MIN	.053	.055	.071	.089	.098	.118
DRIVER SIZE		1	2	2	2	3	3

LENGTH L	TOLERANCE	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
1/4		1	- 9 -				
3/8		2	10	- 20 - -	- 30 - -	- 41 - -	
1/2		3	11	21	31	42	- 53 - -
5/8	± 1/32	4	12	22	32	43	54
3/4		5	13	23	33	44	55
7/8			14	24	34	45	56
1			15	25	35	46	57
1-1/4				26	36	47	58
1-1/2	± 3/64			27	37	48	59
1-3/4					38		60
2					39		61

MATERIAL: Steel, carbon, in accordance with procurement specification.
FINISH: Cadmium plated in accordance with Federal Specification QQ-P-416, Type II, Class 3.
THREADS: Thread types to be in accordance with applicable requirements of procurement specification.
HEAT TREATMENT: Case hardened or heat treatment to meet performance requirements of procurement specification.
RECESS: Except for dimensions W, T, N, K and Depth of Gage Penetration the recess shall be in accordance with MS 9006.
* SHORT LENGTHS: Lengths above dotted line have fine pitch threads.
HOLE SIZES: For approximate hole sizes see MS 24631.
DIMENSIONS: All dimensions are in inches unless otherwise specified.
PART NUMBERS: The MS part number consists of the MS number plus the dash number. Example MS 24617-1.
NOTES: (1) For design feature purposes, this standard takes precedence over procurement documents referenced herein.
(2) Referenced documents shall be of the issue in effect on date of invitations for bid.

(B) CANCELLED - SEE SHEET 2

(B) FOR CHANGES SEE SHEETS 1 & 2

APPROVED 5 Oct 59 — REVISED (A) 25 Feb 1963 (B) 27 AUG 1969

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. WC Other Cust SH 82	TITLE SCREW, TAPPING-THREAD FORMING, TYPE A, PAN HEAD, CROSS RECESSED, STEEL, CARBON, CADMIUM PLATED	MILITARY STANDARD MS 24617
PROCUREMENT SPECIFICATION FF-S-107	SUPERSEDES: MS 24637	SHEET 1 OF 2

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 20260-23114.582
Check the source to verify that this is the current version before use.

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED. SUP CLASS
5305

The screws covered by the following dash numbers listed in MS 24637 are cancelled after 25 Feb 1963. Use the dash numbers given in Sheet 1. The cancelled screws cannot always replace the superseding screws and should be used until existing stocks are depleted. Use only the superseding screws for design and engineering. Replacement shall be in accordance with the table below.

CROSS REFERENCE	
CANCELLED	SUPERSEDED BY
MS 24637	MS 24617
DASH NO.	DASH NO.
1	1
2	2
3	3
4	4
5	5
10	9
11	10
12	11
13	12
14	13
15	14
16	15
22	20
23	21
24	22
25	23
26	24
27	25
28	26
29	27
33	30
34	31
35	32
36	33
37	34
38	35
39	36
40	37
41	38
42	39
45	42
46	43
47	44
48	45
49	46
50	47
51	48
56	53
57	54
58	55
59	56
60	57
61	58
62	59
63	60
64	61

APPROVED 5 Oct 59 REVISED (A) 25 Feb 1963 (B) FOR CHANGES SEE SHEETS 1 & 2.

(B)

CANCELLED AFTER 27 AUG 1969
USE MS51861.

FOR INTERCHANGEABILITY RELATIONSHIP
SEE MS51861.

P.A. WC Other Cust SH 82	TITLE SCREW, TAPPING-THREAD FORMING, TYPE A, PAN HEAD, CROSS RECESSED, STEEL, CARBON, CADMIUM PLATED	MILITARY STANDARD MS24617
PROCUREMENT SPECIFICATION FF-S-107	SUPERSEDES: MS 24637	SHEET 2

Source: https://assist.dla.mil -- Downloaded: 2020-10-23T14:58Z
Check the source to verify that this is the current version before use.

DD FORM 1 SEP 57 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.