This standard has been approved by the Department of the USAF and is mandatory for use by that activity. All other military activities are requested to employ this standard where suitable.

NOTICE — When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

DD FORM 672-1 (Revised November 1966) — PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE


PROCUREMENT SPECIFICATION: P.A. USAF Other Cost


SUPERSEDES

TITLE: SEAL, PLAIN, RUBBER, (FOR USE WITH FUEL RESISTANT) MOD IN GROOVE

MILITARY STANDARD MS 27764 (USAF)

SHEET 1 OF 1

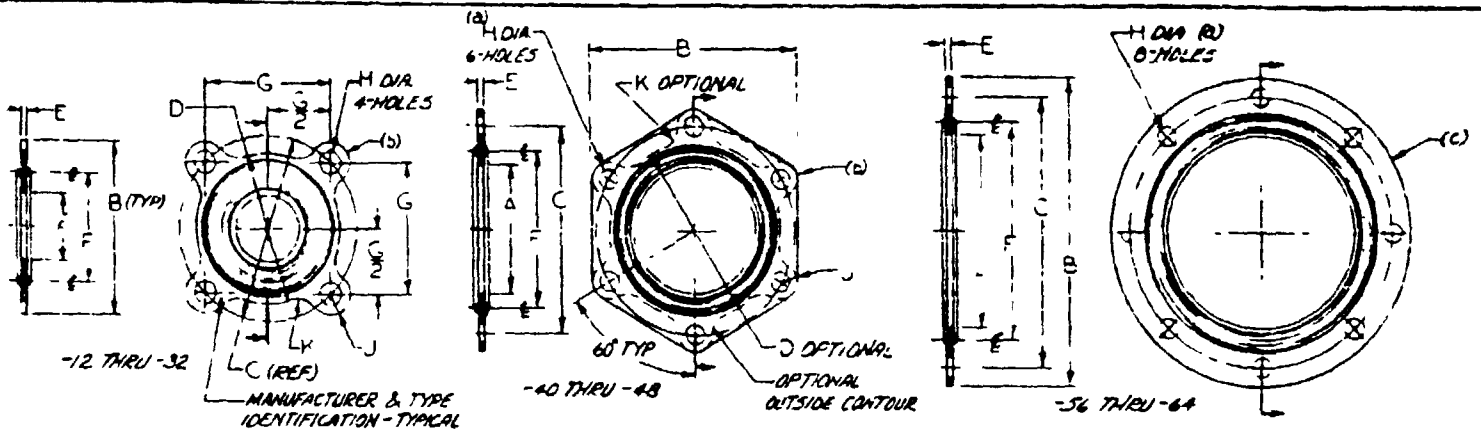



ENLARGED SECTION TYPICAL FOR MS 51765

MS PART NO.	NOMINAL TUBE O.D. REF	A DIA	B	C DIA	D DIA	E ±.004	F DIA	G	H +.010 -.005 DIA	J RAD	K RAD
MS 12	3/16	.669	1 7/32	1.435	1 1/4	.080	64/64	1.136	.205	7/32	7/32
MS -12 16	1/4	.669	1 3/4	1.856	1 1/2	.080	1 47/64	1.312	.205	7/32	7/32
MS 16	1	.904	1 3/4	1.856	1 1/2	.080	1 47/64	1.312	.205	7/32	7/32
MS -16-24	1	.904	2 3/8	2.469	2 1/8	.080	1 49/64	1.812	.266	9/32	9/32
MS -20	1 1/4	1.138	2 3/16	2.342	1 31/32	.080	1 1/2	1.656	.266	9/32	9/32
MS -20-24	1 1/4	1.138	2 3/8	2.563	2 1/8	.080	1 49/64	1.812	.266	9/32	9/32
MS -24	1 1/2	1.372	2 3/8	2.563	2 1/8	.080	1 49/64	1.812	.266	9/32	9/32
MS -32	2	1.841	3	3.339	2 3/4	.080	2 15/32	2.375	.328	5/16	5/16
MS -40	2 1/2	2.341	4	3.812	3 1/4*	.090	2 53/64		.328	3/8	3/8*
MS -48	3	2.841	4 1/2	4.312	3 3/4*	.090	3 5/16		.328	3/8	3/8*
MS -56	3 1/2	3.341	5 5/16	4.875		.090	3 13/16		.328		
MS -64	4	3.841	6 1/8	5.438		.090	4 5/16		.328		

(a) 'H' DIAMETER HOLES MUST BE EQUALLY SPACED ON 'C' DIAMETER WITHIN .005

(b) COLOR MARKINGS — IN SIZES -12 THRU -48, OUTSIDE EDGE SHALL HAVE AT LEAST 3 NON-PERMANENT RED COLORED MARKINGS MORE THAN 1/4 INCH LONG TO INDICATE TYPE OF SEAL

(c) COLOR MARKINGS — ON SIZES -56 THRU -64, OUTSIDE EDGES SHALL HAVE NON-PERMANENT RED COLORED MARKING EXTENDING AT LEAST THREE-QUARTERS OF THE WAY AROUND THE PART

MATERIAL: METAL RETAINER, ALUMINUM ALLOY, SPEC QQ-A-327, TEMPER T6, ANODIZED TO MIL-A-8625, TYPE-II
RUBBER SEAL SHALL CONFORM TO MATERIAL REQUIREMENTS OF SPEC MIL-P-5315

REMOVE ALL BURRS AND SHARP EDGES

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES, DEC MKS ± .005, FRACTIONS ± 1/64, ANGLES ± 1/2°

INDIVIDUALLY PACKAGE PER SPEC MIL-P-116, METHOD IC-1.

PRODUCT SHALL BE PERMANENTLY IDENTIFIED AS TO MANUFACTURER AND TYPE

SEAL DESIGN MUST PROVIDE SUBSTANTIAL FILLING OF THE GROOVE WHEN ASSEMBLED

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID

* SUGGESTED DIMENSIONS FOR "D" AND "K" SIZES (-40 THRU -48)

APPROVED 20 July 1962 REVISED

5330

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:18Z
Check the source to verify that this is the current version before use.