
FED. SUP CLASS
6220

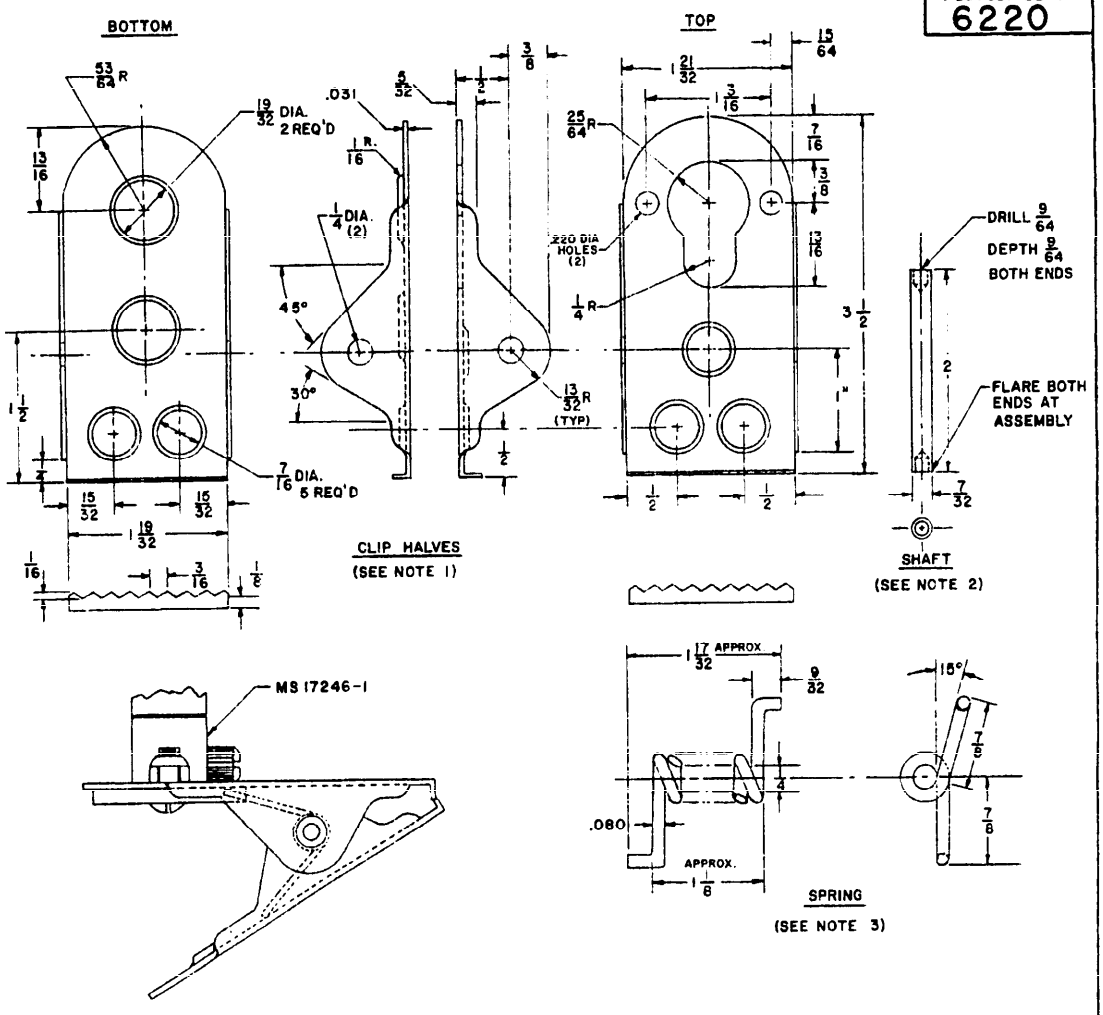

TYPICAL CLIP INSTALLATION

NOTE 1: STEEL MIL-S-7809, CLASS COLD ROLLED, CONDITION AS ROLLED. ALL BENDS $\frac{1}{64}$R UNLESS OTHERWISE SPECIFIED. REMOVE BURRS. CADMIUM PLATE QQ-P-416, TYPE I, CLASS A.

NOTE 2: BRASS QQ-B-626, COMPOSITION 22, TEMPER $\frac{1}{2}$ HARD. CADMIUM PLATE QQ-P-416, TYPE I, CLASS A.

NOTE 3: 13 TURNS CLOSE WOUND STEEL WIRE QQ-W-470, CADMIUM PLATE QQ-P-416, TYPE I, CLASS A. HEAT SPRING 500°-550°F. FOR 20 MINUTES AFTER FORMING.

USERS:

REVIEWERS:
ARMY - MO
NAVY - WP
AIR FORCE - 82

THIS MILITARY STANDARD HAS BEEN APPROVED BY THE DEPARTMENT OF DEFENSE AND IS MANDATORY FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE. SELECTION FOR ALL NEW ENGINEERING AND DESIGN APPLICATIONS AND REPETITIVE USE SHALL BE MADE FROM THIS DOCUMENT.

APPROVED 6 DEC. 1965 REVISED

P.A. AIR FORCE - 82 Other Cust ARMY - MO NAVY - WP	TITLE CLIP ASSEMBLY, COCKPIT UTILITY LIGHT	MILITARY STANDARD MS 27424
PROCUREMENT SPECIFICATION MIL-L-6484	SUPERSEDES:	SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-03-23T15:24Z
Check the source to verify that this is the current version before use.