
FED. SUP CLASS
4730

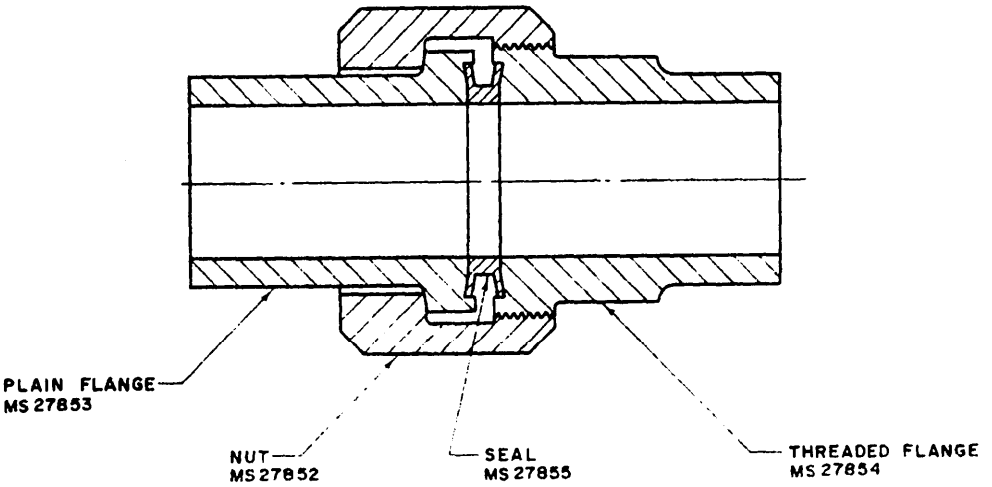


| MS ASSEMBLY NO. | TUBE O.D. | NUT | PLAIN FLANGE | THREADED FLANGE | SEAL |
|---|---|---|---|---|---|
| MS 27851-02 | 1/8 | MS 27852-02 | MS 27853-02 | MS 27854-02 | MS 27855-02 |
| | | | | | |
| MS 27851-04 | 1/4 | MS 27852-04 | MS 27853-04 | MS 27854-04 | MS 27855-04 |
| | | | | | |
| MS 27851-06 | 3/8 | MS 27852-06 | MS 27853-06 | MS 27854-06 | MS 27855-06 |
| MS 27851-08 | 1/2 | MS 27852-08 | MS 27853-08 | MS 27854-08 | MS 27855-08 |
| | | | | | |
| MS 27851-12 | 3/4 | MS 27852-12 | MS 27853-12 | MS 27854-12 | MS 27855-12 |
| MS 27851-16 | 1 | MS 27852-16 | MS 27853-16 | MS 27854-16 | MS 27855-16 |

1. DO NOT USE UNASSIGNED PART NUMBERS.
2. REFER TO MS 27850 FOR INSTALLATION INSTRUCTIONS.
   FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
   REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 14 JULY 1967 REVISED

Review activities: 11, 14, 19, 69, 85 8 NAS

This standard has been approved by the Department of the AIR FORCE and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

| | | |
|---|---|---|
| P.A. USAF 12<br>Other Cust | TITLE<br>FITTING ASSEMBLY, STRAIGHT<br>THREADED, FLUID CONNECTION, 4000 PSI | MILITARY STANDARD<br>MS 27851 (USAF) |
| PROCUREMENT SPECIFICATION<br>MIL-F-27417 | SUPERSEDES: | SHEET 1 OF 1 |

DD FORM 1 SEP 67 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:52Z
Check the source to verify that this is the current version before use.