
FED. SUP CLASS.
1560

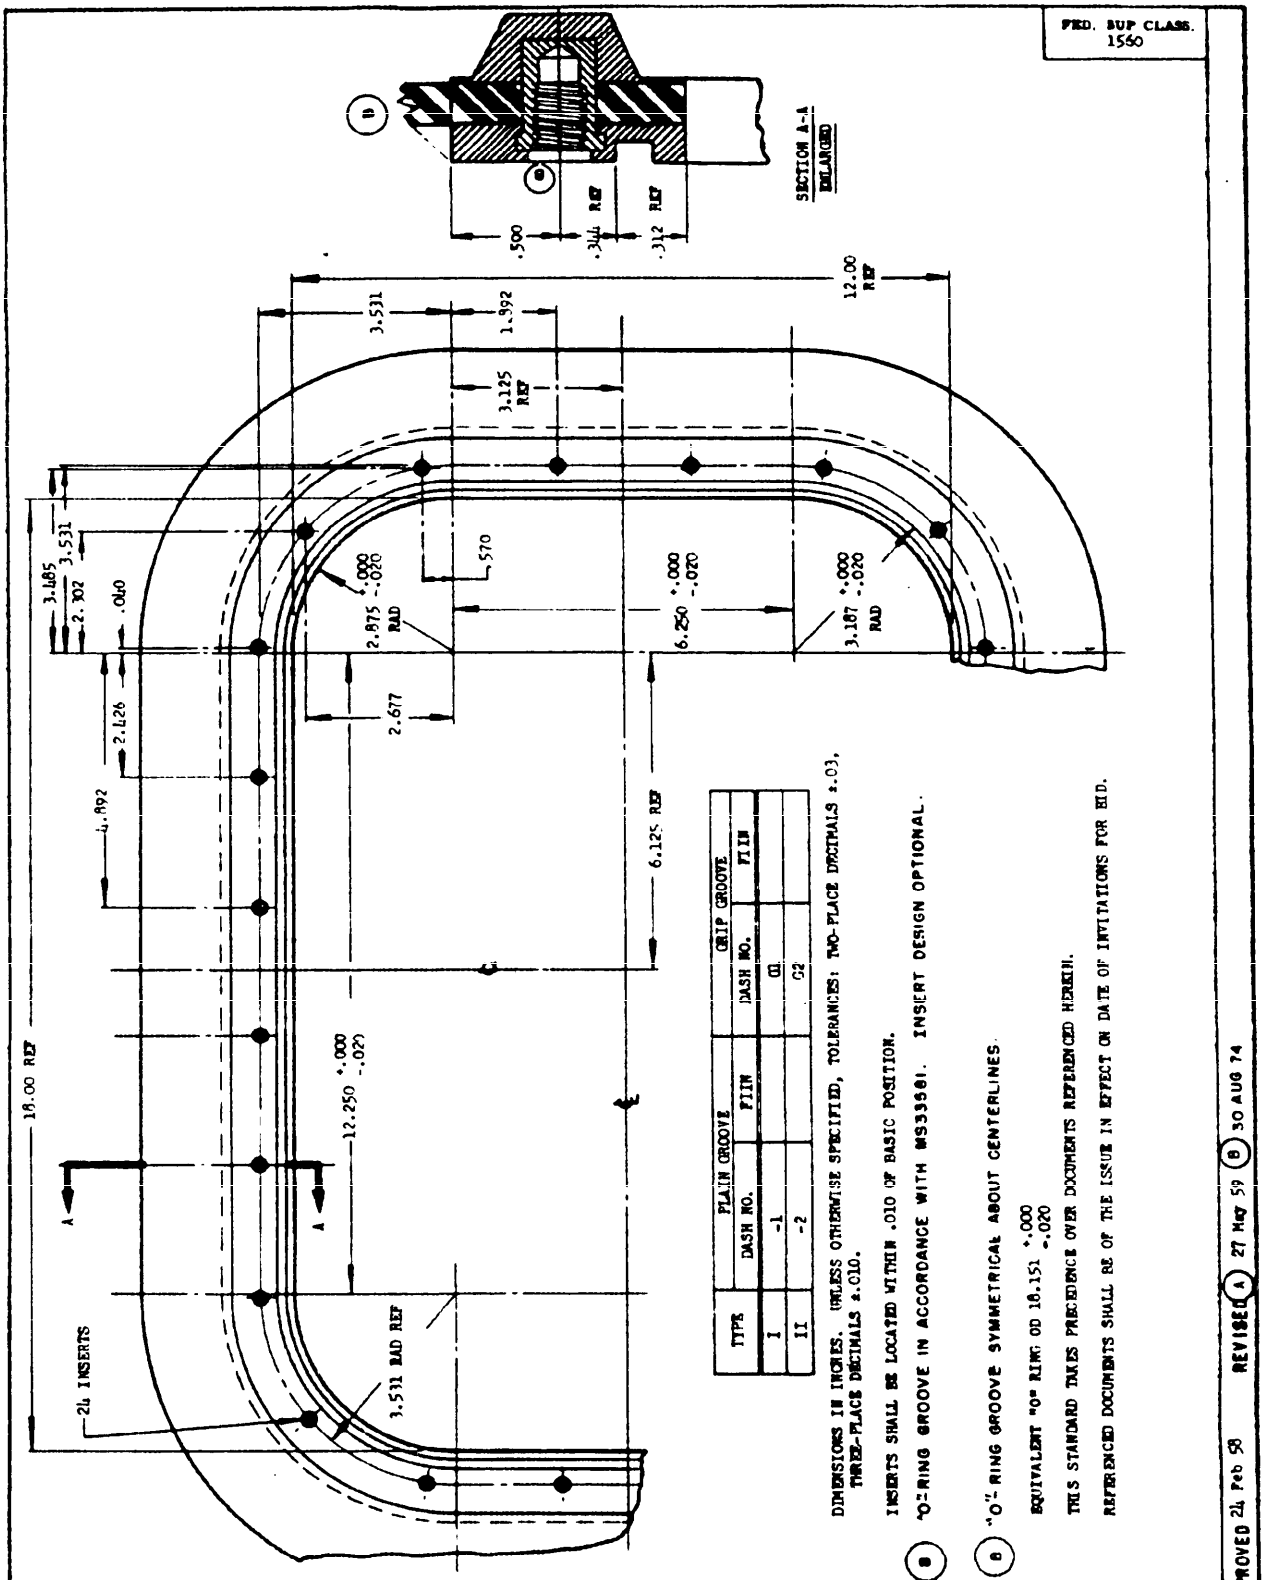

TYPE	PLAIN GROOVE DASH NO.	PLAIN GROOVE FIN	GRIP GROOVE DASH NO.	GRIP GROOVE FIN
I	-1		G1	
II	-2		G2	

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: TWO-PLACE DECIMALS ±.03, THREE-PLACE DECIMALS ±.010.

INSERTS SHALL BE LOCATED WITHIN .010 OF BASIC POSITION.

(B) "O"-RING GROOVE IN ACCORDANCE WITH MS33581. INSERT DESIGN OPTIONAL.

(B) (B) "O"- RING GROOVE SYMMETRICAL ABOUT CENTERLINES.

EQUIVALENT "O" RING OD 18.151 +.000 -.020

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 24 Feb 58 REVISED (A) 27 May 59 (B) 30 AUG 74

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

REVIEWER:
AIR FORCE - 80, 82

P.A. AIR FORCE - 11
Other Cust
Army -
Navy - AS

TITLE
(B) FITTING, ATTACHMENT, MOLDED TANK, FLUSH, "O" RING, RECTANGULAR, 12 x 18

MILITARY STANDARD
MS29565

PROCUREMENT SPECIFICATION
MIL-F-6396

SUPERSEDES

SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

☆ U. S. GOVERNMENT PRINTING OFFICE: 1974-603-113 3543

Source: https://assist.dla.mil -- Downloaded: 202640-23T17:03Z
Check the source to verify that this is the currentversion before use.