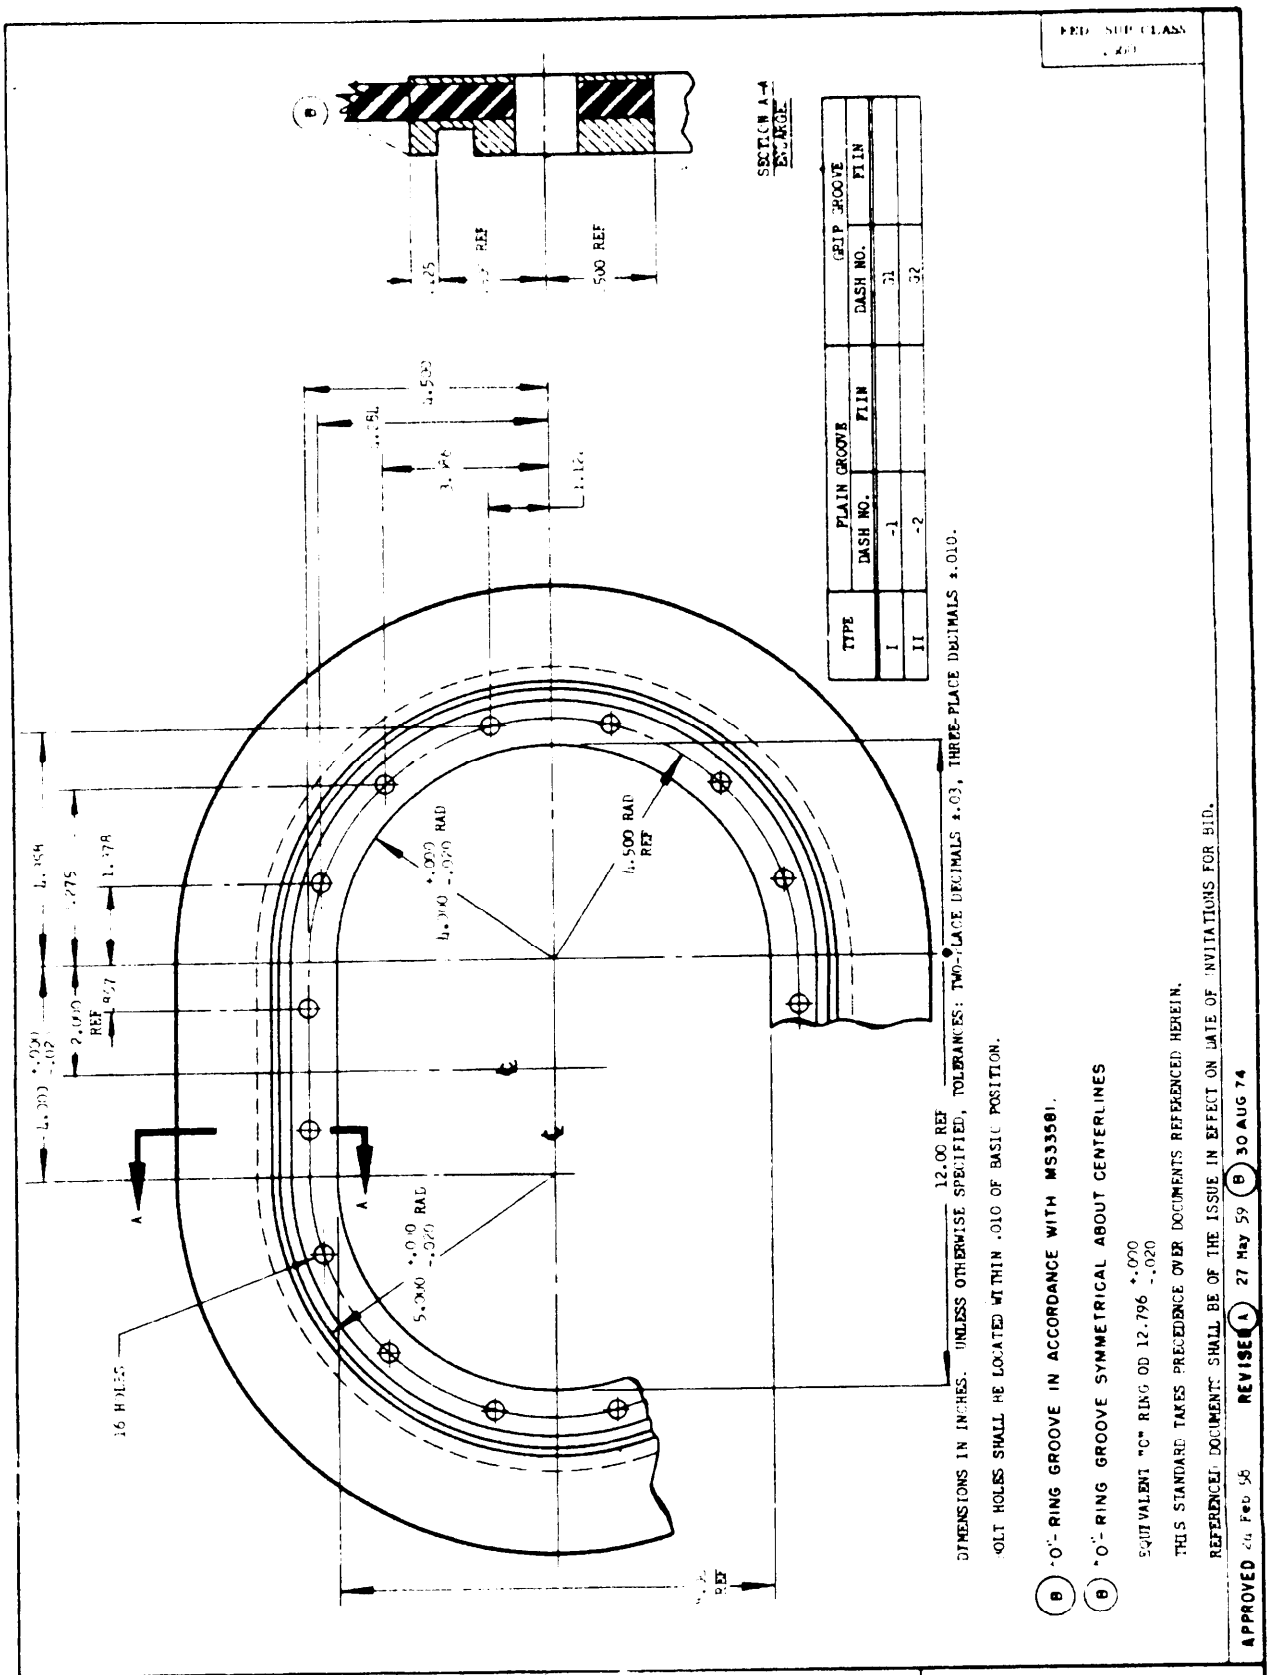



FED SUP CLASS

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: TWO-PLACE DECIMALS ±.03, THREE-PLACE DECIMALS ±.010.

BOLT HOLES SHALL BE LOCATED WITHIN .010 OF BASIC POSITION.

(B) "O"-RING GROOVE IN ACCORDANCE WITH MS33581.

(B) "O"-RING GROOVE SYMMETRICAL ABOUT CENTERLINES

EQUIVALENT "O" RING OD 12.796 +.000 -.020

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 24 Feb 56 REVISED (A) 27 May 59 (B) 30 AUG 74

REVIEWER:
AIR FORCE - 80,82

PA AIR FORCE - II
Other Cust
Army -
Navy - AS

PROCUREMENT SPECIFICATION
MIL-F-6396

TITLE
FITTING,

SUPERSEDES

MILITARY STANDARD
MS29566
SHEET 1 OF 1

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

☆ U.S. GOVERNMENT PRINTING OFFICE: 1977-703-020 5107

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:03Z
Check the source to verify that this is the current version before use.