
FED. SUP CLASS
5935

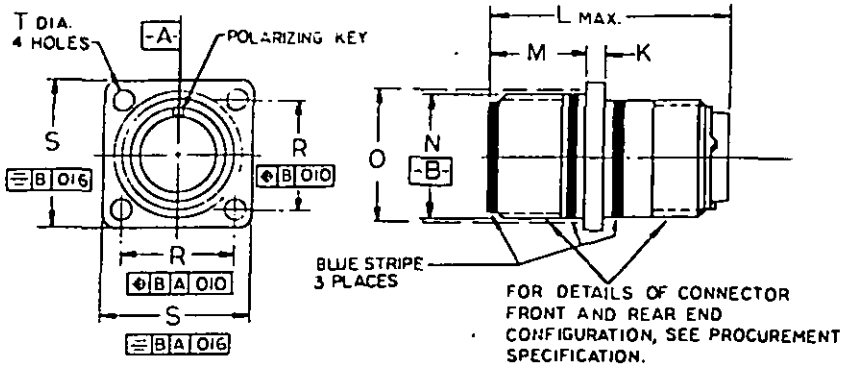

CLASSES K,L,U & W ENVIRONMENT RESISTANT

CLASS K CONNECTOR WITH ELECTROLESS NICKEL FINISH INACTIVE FOR DESIGN AFTER 25 APRIL 1974

(E) CLASS U INACTIVE FOR DESIGN AFTER 23 MAR 76
USE CLASS L FOR NEW DESIGN

NOTES:

1. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES; DECIMALS ±.016
2. DIMENSIONS AND TOLERANCING IN ACCORDANCE WITH ANSI Y14.5-1973
3. MIL-C-5015 CRIMP CONTACT, FRONT AND REAR RELEASE CONNECTORS AND SOLDER CONTACT CONNECTORS ARE INTERMATEABLE.
4. UNLESS OTHERWISE SHOWN, CORRESPONDING FEATURES OF PIN AND SOCKET CONTACT CONNECTORS ARE IDENTICAL.
5. EXTRACTION TOOL MS3165-16 SHALL BE USED TO REMOVE SIZE 16 CONTACTS THAT ARE CRIMPED TO MIL-W-27125 OR MIL-W-27500 FIRE ZONE WIRE.
6. (E) FOR INSERT ARRANGEMENTS SEE MIL-STD-1651.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(E) FOR CHANGES SEE SHEETS 1&2

APPROVED OCTOBER 18 1971 REVISED (E) 23 MAR 76

User activities: Army, Navy, Air Force

Reviewer activities: Army AT,AV,ME,MI,MU
Navy EC
Air Force 11,17,80,85

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A NAVY-AS	International interest:	TITLE (E) CONNECTORS, RECEPTACLE, ELECTRICAL, WALL MOUNTING, REAR RELEASE, CRIMP CONTACT, AN TYPE	MILITARY STANDARD
Other Cust ARMY-EL AF-85			MS3450
Procurement Specification MIL-C-5015		SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT NO. 5935-1990-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:05Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

SIZE	K ±.015	L MAX. SIZE 16 & 12 CONTS	L MAX. SIZE 8 & 10 CONTS	M +.031 -.000	N +.000 -.002	O (REF) MTG. HOLE	R T.P. ℄ - ℄	S ±.031	T +.010 -.015 CLASS L,W	T +.010 -.015 CLASS K
8S	.083	2.031		.562	.532	.562	.594	.875	.120	.150
10S					.656	.688	.719	1.000		
10SL					.656	.688	.719	1.000		
12S		2.031		.562	.782	.812	.812	1.094		
12		2.125		.750	.782	.812	.812	1.094		
14S		2.031		.562	.906	.938	.906	1.188		
14		2.125		.750	.906	.938	.906	1.188		
16S		2.031		.562	1.032	1.062	.969	1.281		
16	.083	2.125	2.500	.750	1.032	1.062	.969	1.281		.150
18	.125				1.156	1.188	1.062	1.375		.177
20					1.282	1.312	1.156	1.500		
22				.750	1.406	1.438	1.250	1.625	.120	
24				.812	1.532	1.562	1.375	1.750	.147	
28				.812	1.782	1.812	1.562	2.000	.147	.177
32				.875	2.032	2.062	1.750	2.250	.173	.209
36					2.282	2.312	1.938	2.500		
40					2.532	2.562	2.188	2.750		
44					2.782	2.812	2.375	3.000		
48	.125	2.125	2.500	.875	3.032	3.062	2.625	3.250	.173	.209

(E)

EXAMPLE OF PART NO.: MS3450L 16-5PX

MS 3450 L 16-5 P X

- MS 3450 — BASIC PART NO.
- L — CLASS K, L, U, W
- 16-5 — MATERIAL DESIGNATOR
  - S-STAINLESS STEEL.
  - T-FERROUS ALLOY WITH CADMIUM PLATE.
  - LEAVE BLANK FOR ALUMINUM ALLOY AND WROUGHT ALUMINUM
  - THE FOLLOWING IS INACTIVE FOR DESIGN:
  - LEAVE BLANK FOR FERROUS ALLOY WITH ELECTROLESS NICKEL FINISH.
- P — SHELL SIZE
- X — INSERT ARRANGEMENT
- CONTACT DESIGNATOR
- ALTERNATE INSERT POSITION W, X, Y OR Z. LEAVE BLANK FOR NORMAL POSITION

APPROVED OCTOBER 18 1971 REVISED (E) FOR CHANGES SEE SHEETS 1 & 2

User activities: Army, Navy, Air Force

Reviewer activities: Army AT, AV, ME, MI, MU; Navy EC; Air Force 11, 17, 80, 85

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A NAVY-AS	International interest	TITLE (E) CONNECTORS, RECEPTACLE, ELECTRICAL, WALL MOUNTING, REAR RELEASE, CRIMP CONTACT, AN TYPE	MILITARY STANDARD
Other Cust ARMY-EL AF-85			MS3450
Procurement Specification MIL-C-5015		SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:05Z
Check the source to verify that this is the current version before use.