

FED. SUP CLASS
6140

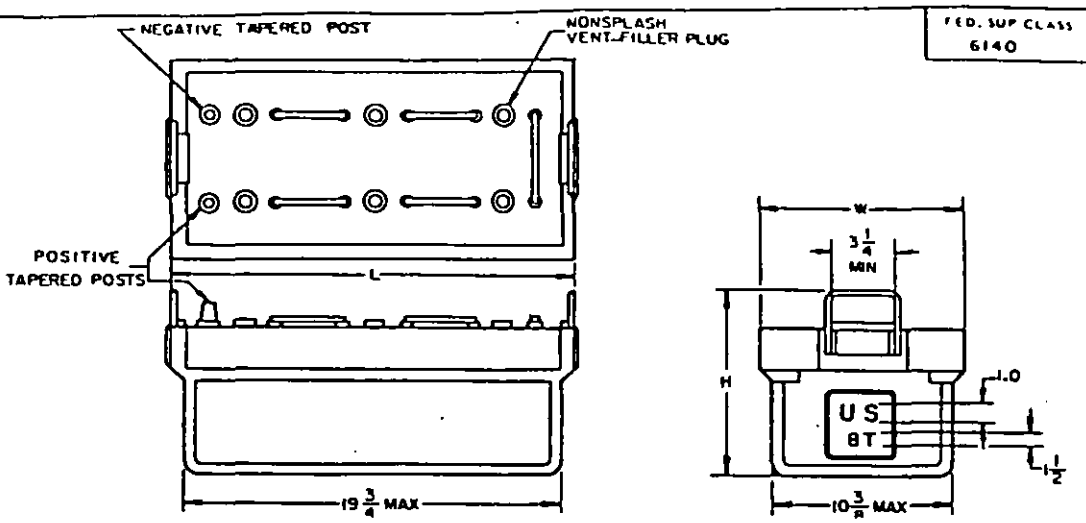


TYPE 88-223/U (8T).

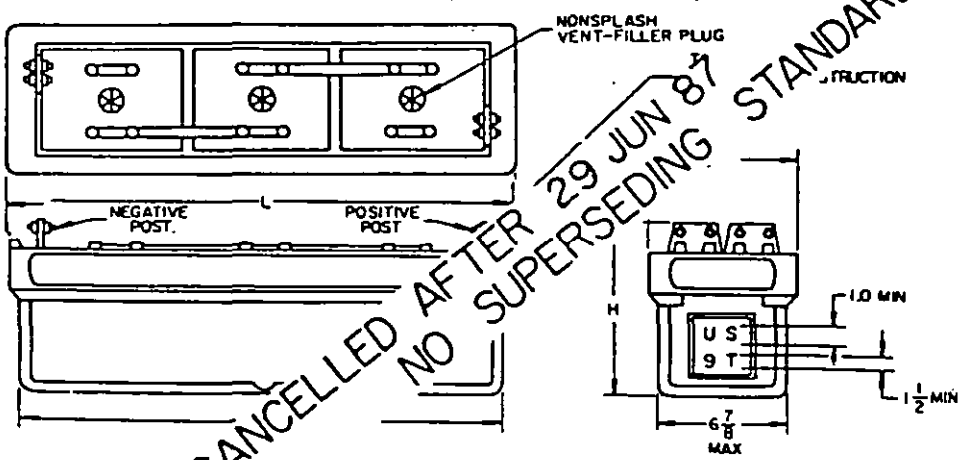

CANCELLED AFTER 29 JUN 87 NO SUPERSEDING STANDARD.

TYPE 88-282/U8( )
(9T)

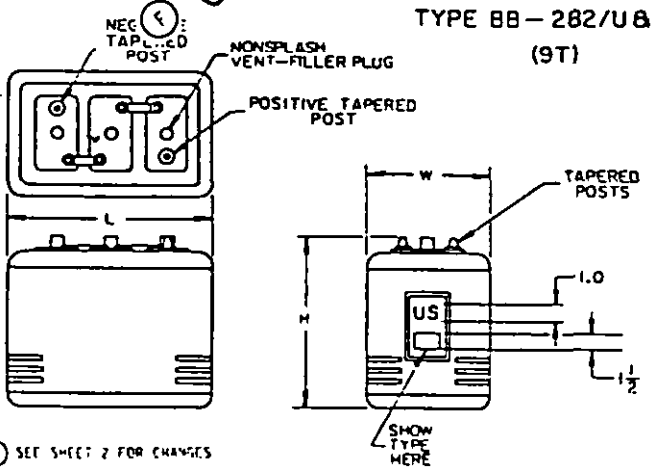

⑥ INACTIVE FOR NEW DESIGN AFTER 11JUNE1964 USE MS 35000

TYPE 88-221/U (2H)
TYPE 88-55 (4H)
TYPE 88-57.(7H)

Ⓔ SEE SHEET 2 FOR CHANGES

REVIEWER ACTIVITIES: ARMY-EL; AF-85
USER ACTIVITIES: ARMY-GL; NAVY-YD

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 27 FEBRUARY 1987 REVISED ⑪ 11 JUNE 1964 ⑩ 10 OCTOBER 1966 Ⓕ 29 JUNE 1987

P.A MO(ATAC) Other Cust Navy – YD AF – 82	TITLE BATTERY, STORAGE, LEAD-ACID, NON-WATERPROOF	MILITARY STANDARD MS 35001
PROCUREMENT SPECIFICATION MIL-B-11188	SUPERSEDES:	SHEET 1 OF 2

DD FORM 672-1 (Conditional)

6140-0631

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:08Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
6140

BATTERY DIMENSIONS										
TYPE NUMBER	LENGTH (L) INCHES				WIDTH (W) INCHES		HEIGHT (H) INCHES			
	WITH HANDLES		WITHOUT HANDLES				WITH HANDLES		WITHOUT HANDLES	
	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN
88-221/U (2H)			10-3/8	10-3/16	7-1/8	7			9-3/8	9-1/16
88-55 (4H)			13-1/8	12-5/8	7-1/8	7			9-3/8	9-1/16
88-223/U (8T)	21-1/8	20-7/8	20-1/2	20-1/4	11	10-13/16	10-9/16	10-7/16	9-3/4	9-1/2
88-282/U (9T)			25-1/2	25-1/4	7-1/2	7-3/8			11-9/16	10-7/8
88-57 (7H)			16-1/4	16	7-1/8	6-7/8			9-3/8	9-1/8

(E)

PHYSICAL AND ELECTRICAL REQUIREMENTS					
	88-221/U (2H)	88-55 (4H)	88-223/U (8T)	88-282/U (9T)	88-57 (7H)
PART NUMBER CHARGED AND DRY	MS 35001-1	MS 35001-3	MS 35001-5	MS 35001-7	01-9
CHARGED AND WET	MS 35001-2	MS 35001-4	MS 35001-6	MS 350	01-10
CLASS	FE	FE	FE	FE	
WEIGHT (UNFILLED) NOMINAL	38 POUNDS	50 POUNDS	125 POUNDS		POUNDS
WEIGHT (FILLED) NOMINAL	48 POUNDS	63 POUNDS	165 POUNDS		85 POUNDS
NOMINAL VOLTAGE	6 VOLTS	6 VOLTS	12 VOLTS		6 VOLTS
FINAL VOLTAGE AT 20 HOUR RATE	5.25 VOLTS	5.25 VOLTS	10.5 V	S	5.25 VOLTS
RATED CAPACITY AT 20 HOUR RATE	120 AMP-HOURS	150 AMP-HOURS	200	MP-HOURS	200 AMP-HOURS
DISCHARGE AT 20-HOUR RATE	6 AMPERES	7.5 AMPERES		5 AMPERES	10 AMPS
CHARGING RATE	6 AMPERES	8 AMPERES		17 AMPERES	18 AMPS

(E)

QUALIFICATION AND C MANCE INSPECTION REQUIREMENTS					
TEST	MINIMUM VALUES				
	88-221/U (2H)		88-223/U (8T)	88-282/U (9T)	88-57 (7H)
FILLED DISCHARGE AT 80° F: TIME TO DROP TO 1 VOLT PER CELL	8 M	MINUTES	14 MINUTES	25 MINUTES	14 MINUTES
FULL CHARGE CAPACITY AT 80°F		20 AMP-HRS	200 AMP-HRS	335 AMP-HRS	200 AMP-HRS
HIGH DISCHARGE RATE (300 AMPS) AT MINUS 40° F. TIME TO DROP TO 1 VOLT PER CE		3 MINUTES	4 MINUTES	7 MINUTES	4 MINUTES
MINIMUM 5 SECOND VOLTAG	TS	4.00 VOLTS	8.80 VOLTS	4.90 VOLTS	4.40 VOLTS
LIFE CYCLE CAPACITY T	YCLES	300 CYCLES	404 CYCLES	468 CYCLES	338 CYCLES
OVERCHARGE CYCLE	11 CYCLES	15 CYCLES	25 CYCLES	31 CYCLES	20 CYCLES
RETENTION OF CHA (1)	96 AMP-HRS	120 AMP-HRS	160 AMP-HRS	268 AMP-HRS	160 AMP-HRS

CANCELLED AFTER 29 JUN 87
NO SUPERSEDING STANDARD

NOTES:

1. FOR CHARGED AND DRY BATTERIES (MS 35001-1, -3, -5, -7 & -9), ELECTROLYTE NOT FURNISHED.
2. FOR CHARGED AND WET BATTERIES (MS 35001-2, -4, -6, -8 & -10), TO BE FILLED WITH ELECTROLYTE AND READY TO USE.
3. UNLESS OTHERWISE SPECIFIED, TYPE 8T BATTERIES ARE FURNISHED WITH HANDLES. ALL TYPE 8T BATTERIES FOR SPARE PARTS ARE TO BE FURNISHED WITH HANDLES.
4. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. TOLERANCES ARE 1/16 ON FRACTIONS.
5. THE MS PART NUMBER CONSISTS OF THE MS MILITARY NUMBER FOLLOWED BY A DASH NUMBER.
6. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
7. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
8. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, NOTATIONS OR REFERENCED DOCUMENTS.

REVIEWER ACTIVITIES: ARMY-EL; AF-85
USER ACTIVITIES: ARMY-GL; NAVY-YD

This military standard has been approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

AMSC N/A FSC 6140 (E) 10 OCT 1986 (E) 20 JUNE 1987

P.A. ARMY-AT, Other Cust: NAVY-YD, AF-11	TITLE: BATTERY, STORAGE, LEAD-ACID, NON-WATERPROOF	MILITARY STANDARD MS35001
PROCUREMENT SPECIFICATION MIL-B-11199	SUPERSEDES	SHEET 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:08Z
Check the source to verify that this is the current version before use.