
FED. SUP CLASS
6640

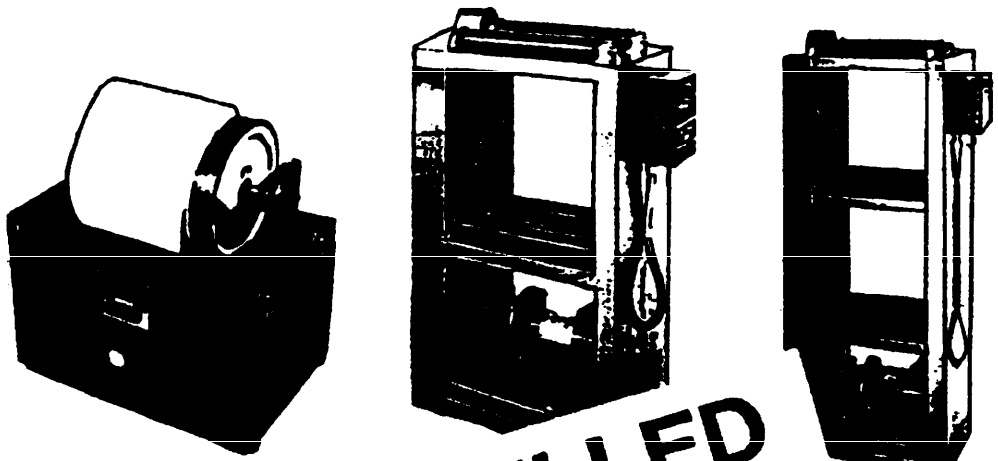

CANCELLED
CANCELLED AFTER 3 SEP 1991
NO SUPERSEDING STANDARD

MATERIAL: Mil... ...ded steel with, copper-base oil-impregnated, bear... ...th ASTM B438.

DESIGN: The m... ...shall have sets of rollers that have one convex and the other concave for automatically centering the jars.

MS36242-1 shall have one tier that handles jars 5 to 33 cm diameter and at constant roll speed of 290 rpm. Unit shall be powered by a 1/4 hp, 115V AC, 60Hz single-phase, open type motor.

MS36242-2 shall have two tiers that handle jars 6.4 to 33 cm diameter at variable speeds of 160 to 320 rpm (motor requirements same as -1).

MS36242-3 shall have three tiers and handle jars 6.4 to 33 cm on the top two tiers and handle jars 10 to 33 cm on the lower tier. Speed shall be variable 160-320 rpm, powered by a 1/3 hp, 115V AC, 60Hz, single-phase enclosed motor.

All electrical components shall conform to the standards of Underwriters Laboratory, Incorporated.

NOTE: Items differing from this Military Standard by minor variations in design or dimensions are considered standard under this document, provided such variations do not affect performance and are not in conflict with the material requirements specified herein.

Ⓐ CANCELLATION

P.A. EA Other Coop MS 99	INTERNATIONAL INTEREST	TITLE MILL, BALL AND JAR, LABORATORY	MILITARY STANDARD MS36242
Procurement Specifications NONE	SUPERSEDES:		SHEET 1 OF 1

DD FORM 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

APPROVED 22 JUN 1983 REVISED Ⓐ 3 SEP 1991

USER ACTIVITIES: ARMY - MD, CR
NAVY - MS

REVIEWER ACTIVITIES: ARMY - ME
NAVY - OS
AIR FORCE - 82

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for competitive use shall be made from this document.

CANCELLATION

Project Number 6640-1733-02

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:36Z
Check the source to verify that this is the current version before use.