
FED. SUP CLASS
4730

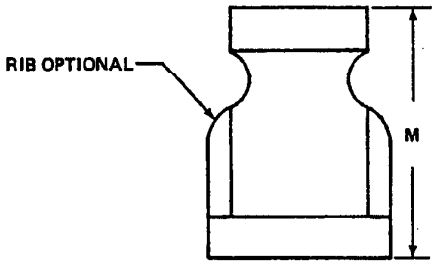

(B) Table I. Dimensions of Reducing Couplings - Class 150.

Dash No.	Nominal Pipe Size	M Length of Reducer	Tol ±	Dash No.	Nominal Pipe Size	M Length of Reducer	Tol ±
1	1/4 x 1/8	1.00	0.08	14	1-1/2 x 1-1/4	2.31	0.16
2	3/8 x 1/4	1.13	0.10	15	1-1/2 x 3/4	2.31	0.16
3	3/8 x 1/8	1.13	0.10	16	2 x 1-1/2	2.81	0.16
4	1/2 x 3/8	1.25	0.12	17	2 x 1	2.81	0.16
5	1/2 x 1/4	1.25	0.12	18	2 x 1/2	2.81	0.16
6	1/2 x 1/8	1.25	0.12	19	2-1/2 x 2	3.25	0.20
7	3/4 x 1/2	1.44	0.12	20	2-1/2 x 1	3.25	0.20
8	3/4 x 3/8	1.44	0.12	21	3 x 2-1/2	3.69	0.20
9	1 x 3/4	1.69	0.14	22	3 x 1	3.69	0.20
10	1 x 1/2	1.69	0.14	23	3-1/2 x 3	4.00	0.24
11	1 x 3/8	1.69	0.14	24	4 x 3-1/2	4.38	0.24
12	1-1/4 x 1	2.06	0.14				
13	1-1/4 x 3/4	2.06	0.14				

(B) Table II. Dimensions of Reducing Couplings - Class 300

Dash No.	Nominal Pipe Size	M Length of Reducer	Dash No.	Nominal Pipe Size	M Length of Reducer
25	3/8 x 1/4	1.44	39	1-1/2 x 1	2.69
26	1/2 x 3/8	1.69	40	1-1/2 x 3/4	2.69
27	1/2 x 1/4	1.69	41	1-1/2 x 1/2	2.69
28	3/4 x 1/2	1.75	42	2 x 1-1/2	3.19
29	3/4 x 3/8	1.75	43	2 x 1-1/4	3.19
30	3/4 x 1/4	1.75	44	2 x 1	3.19
31	1 x 3/4	2.00	45	2 x 3/4	3.19
32	1 x 1/2	2.00	46	2 x 1/2	3.19
33	1 x 3/8	2.00	47	2-1/2 x 2	3.69
34	1 x 1/4	2.00	48	2-1/2 x 1-1/2	3.69
35	1-1/4 x 1	2.38	49	3 x 2-1/2	4.06
36	1-1/4 x 3/4	2.38	50	3 x 2	4.06
37	1-1/4 x 1/2	2.38	51	3 x 1-1/2	4.06
38	1-1/2 x 1-1/4	2.69			

(B) DENOTES CHANGES

P.A	Interested Interest	TITLE	MILITARY STANDARD
NAVY-YD (B) Other Cust ARMY-AR AIR FORCE-99		(B) REDUCER, PIPE-RIGHT HAND THREAD (150 AND 300 POUNDS)	MS39232
Procurement Specification ANSI B16-3 (B)		SUPERSEDES: CPEX4	PAGE 1 OF 2

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

4730-0390

APPROVED 5 APRIL 83 REVISED (A) 23 MARCH 71 (B) 20 JUN 83

(B) Review activities: Army - MI; Navy - ; Air Force - 82; DLA - CS

User activities. Army - ; Navy - MC; Air Force -

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:49Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4730

(B) NOTES:

1. MATERIAL: Material shall be in accordance with ANSI B16.3.
2. PROTECTIVE COATING: Fittings may be black finish or zinc coated in accordance with ANSI B16.3.
3. THREADS: Reducers shall be threaded right hand with American Standard Taper Pipe Threads (NPT) in accordance with Screw-Thread Standards for Federal Services Handbook H-28.
4. DIMENSIONS: All dimensions are in inches unless otherwise specified.
5. PART NUMBER: The MS part number consists of the MS number, the dash number, and the coating identification letter.

   Examples:

   MS39232-1 represents a 1/4 x 1/8-inch reducer, zinc coated.
   MS39232-1B represents a 1/4 x 1/8-inch reducer, black finish.
6. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
7. Referenced documents shall be of the issue in effect on date of invitations for bid.
8. Right-hand reducers shall not have more than two ribs.

(B) DENOTES CHANGES

P.A NAVY-YD (B) Other Cust ARMY-AR AIR FORCE-99	International Interest	TITLE (B) REDUCER, PIPE-RIGHT HAND THREAD (150 AND 300 POUNDS)	MILITARY STANDARD MS39232
Procurement Specification ANSI B16.3 (B)		SUPERSEDES: CPEX4	PAGE 2 OF 2

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

4730-0390

APPROVED 5 APRIL 83
REVISED (A) 23 MARCH 71 (B) 20 JUN 83

User activities: Army - MC
Navy - MC
Air Force -

(B) Review activities: Army - MI
Navy -
Air Force - 82
DLA CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:49Z
Check the source to verify that this is the current version before use.