USER ACTIVITIES
REVIEWER ACTIVITIES
This military standard is approved for use by all Departments and Agencies of the Department of Defense
Selection for all new engineering and design applications and for repetitive use shall be made from this
document when applicable.

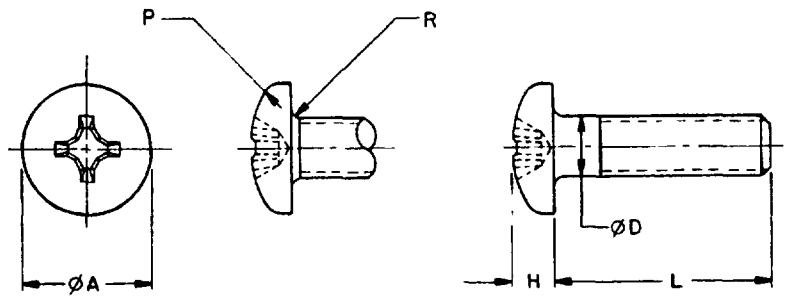


TABLE I. DIMENSIONS AND PART NUMBERS.

NOMINAL SIZE		.112	.138	.164	.190	.250
THREADS PER INCH UNC-2A		40	32	32	24	20
ØD - BODY DIAMETER	MAX	1120	1380	.1640	.1900	.2500
	MIN	.0925	.1141	.1399	.1586	.2127
ØA - HEAD DIAMETER	MAX	.2190	.2700	.3220	.3730	.4920
	MIN	.2050	2560	.3060	3570	.4730
H - HEAD HEIGHT	MAX	.0800	.0970	1150	.1330	.1750
	MIN	.0700	.0870	1050	.1220	.1620
P - HEAD RADIUS	MIN	.0100	0150	.0150	.0200	0350
R - FILLET RADIUS	MAX	.0170	0210	.0250	0290	.0380
MINIMUM TENSILE LOAD - LBS		360	5450	840	1,050	1,900
L - LENGTH	TOLERANCE	DASH NO	DASH NO	DASH NO	DASH NO	DASH NO
.250				05		
.375				06	13	19
500	+.000		02	07	14	20
625	-.031	01		08	15	21
.750			03	09	16	22
1.000			04	10	17	23
1.250				11		24
1.500	+.000				18	25
2.000	-.062			12		
3.000	+.000 -.094					26

APPROVED 1 AUG 84
REVISED

P A	AR	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust	SH		SCREW, MACHINE, PAN HEAD, CROSS-RECESSED, CARBON STEEL, UNC-2A	MS51492
	99			
PROCUREMENT SPECIFICATION: FF-S-92		SUPERSEDES		PAGE 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:03Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5305

REQUIREMENTS:

1. MATERIAL. CARBON STEEL IN ACCORDANCE WITH ASTM A29-79 GRADE 1015 (UNS G10150) THRU GRADE 1030 (UNS G10300) OR ASTM A29-79 GRADE 1116 (UNS G11160) THRU GRADE 1132 (UNS G11320) THE MINIMUM ULTIMATE TENSILE STRENGTH SHALL BE 60,000 PSI.

2. FINISH. ZINC COATING IN ACCORDANCE WITH ASTM B633-78, $Fe/Zn5$ (5 µm), TYPE II

3. THREADS. THE THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/2. ACCEPTABILITY OF SCREW THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/20, SYSTEM 21

4. THREAD LENGTH. SCREWS 2 000 INCHES LONG AND SHORTER SHALL HAVE COMPLETE THREADS EXTENDING TO WITHIN 2 THREADS OF THE BEARING SURFACE OF THE HEAD, OR CLOSER IF PRACTICABLE LONGER SCREWS SHALL HAVE A MINIMUM THREAD LENGTH OF 1.750 INCHES. THREADS SHALL NOT EXTEND TO THE FILLET RADIUS NOR SHALL THREADS EXTEND TO AND UNDERCUT THE HEAD OF THE SCREW.

5. RECESS. THE RECESS SHALL BE IN ACCORDANCE WITH MS9006.

6. PART NUMBER THE BASIC MS PART NUMBER IS FOLLOWED BY A DASH NUMBER FROM TABLE I.

EXAMPLE: MS51492-01 - SCREW, MACHINE, PAN HEAD, CROSS-RECESSED, CARBON STEEL, 1/2-40UNC-2A, LENGTH .625, ZINC COATED

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.

2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS OR REQUEST FOR PROPOSAL, EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED

3. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN

USER ACTIVITIES
ARMY-ME,MI
NAVY-MC,OS

REVIEWER ACTIVITIES:
ARMY-EA,AV
AIR FORCE - 82
DLA-IS
NSA-NS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

APPROVED 1 AUG 84 REVISED

P.A. AR / Other Cust SH 99	INTERNATIONAL INTEREST	TITLE: SCREW,MACHINE,PAN HEAD, CROSS-RECESSED,CARBON STEEL, UNC-2A	MILITARY STANDARD MS51492
PROCUREMENT SPECIFICATION: FF-S-92	SUPERSEDES		PAGE 2 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5305-1487

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:03Z
Check the source to verify that this is the current version before use.

☆ U.S. GOVERNMENT PRINTING OFFICE 1984 — 506-038/A4598