
FED SUP CLASS
5315

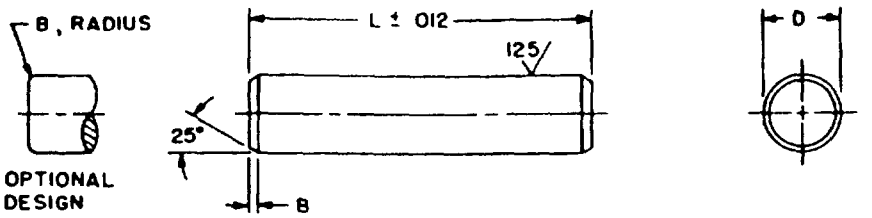

D DIA	NOM	1/16		3/32		1/8		5/32		3/16	
	MAX	.0628		.0940		.1255		.1567		.1880	
	MIN	.0622		.0934		.1245		.1557		.1870	
B ±.010		015		015		015		015		015	
L LENGTH		DASH NUMBER									
		PLAIN	PHOS	PLAIN	PHOS	PLAIN	PHOS	PLAIN	PHOS	PLAIN	PHOS.
188		1	11	21	41						
.250		2	12	22	42						
.312		3	13	23	43	63	83				
375		4	14	24	44	64	84				
438		5	15	25	45	65	85	105	125		
500		6	16	26	46	66	86	106	126		
562		7	17	27	47	67	87	107	127	147	167
625		8	18	28	48	68	88	108	128	148	168
688				29	49	69	89	109	129	149	169
750				30	50	70	90	110	130	150	170
812				31	51	71	91	111	131	151	171
875				32	52	72	92	112	132	152	172
938						73	93	113	133	153	173
1 000						74	94	114	134	154	174
1 125						75	95	115	135	155	175
1 250								116	136	156	176
1 375								117	137	157	177
1 500										158	178
1 625										159	179
1 750										160	180

For additional sizes and notes see sheet 2

REVIEWER AY, MI, MU, WC
USER: AT, CL, MS

APPROVED 19 SEP 1967 REVISED

This military standard is approved by the Weapons Command, Department of the Army and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable

P A WC
Other Cust

PROCUREMENT SPECIFICATION
None

TITLE
PIN, STRAIGHT, STEEL - DRILL ROD

SUPERSEDES REDA REDA REDA 1 REDA 4 REDA 4 1
REDA 5 REDA 6

MILITARY STANDARD
MS51838 (WC)
SHEET 1 OF 2

DD FORM 672-1 (Limited to dimension)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:09Z
Check the source to verify that this is the current version before use.

FED SUP CLASS 5315

D DIA	NOM	1/4	5/16	3/8	7/16	1/2
	MAX	.2505	.3130	.3755	4380	.501
	MIN	.2495	3120	3745	4370	.499
B CHAMFER		015	030	030	030	030

L LENGTH	DASH NUMBER									
	PLAIN	PHOS	PLAIN	PHOS	PLAIN	PHOS	PLAIN	PHOS	PLAIN	PHOS
750	190	210								
812	191	211								
875	192	212	232	252						
938	193	213	233	253						
1 000	194	214	234	254	274	294	314	334	354	374
1 125	195	215	235	255	275	295	315	335	355	375
1 250	196	216	236	256	276	296	316	336	356	376
1 375	197	217	237	257	277	297	317	337	357	377
1 500	198	218	238	258	278	298	318	338	358	378
1 625	199	219	239	259	279	299	319	339	359	379
1 750	200	220	240	260	280	300	320	340	360	380
1 875	201	221	241	261	281	301	321	341	361	381
2 000	202	222	242	262	282	302	322	342	362	382
2 125			243	263	283	303	323	343	363	383
2 250			244	264	284	304	324	344	364	384

NOTES

1 MATERIAL Steel, drill rod, in accordance with QQ-T-560, Class WI-12, or AISI 1090, 1095 or 50100 in accordance with FED STD No 66

2 PROTECTIVE COATING Phosphate coated in accordance with MIL-P-16232 Type 2 Class 2

3 DIMENSIONS All dimensions are in inches unless otherwise specified

4 PART NUMBER The MS part number consists of the MS number plus the dash number Example MS51838-1

5 Referenced documents shall be of the issue in effect on the date of invitations for bid

6 For design feature purposes, this standard takes precedence over procurement documents referenced herein

REVIEWER: AV, MI, MU, WC
USER: AT, EL, CL, ME

APPROVED 19 SEP 1967 REVISED

This military standard is approved by the Weapons Command, Department of the Army and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable

PA WC
Other Cust

TITLE
PIN, STRAIGHT, STEEL-DRILL ROD

MILITARY STANDARD
MS51838 (WC)

PROCUREMENT SPECIFICATION
None

SUPERSEDES [illegible]

SHEET OF

DD FORM 672-1 [illegible]

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:09Z
Check the source to verify that this is the current version before use.