
FED. SUP CLASS
4730

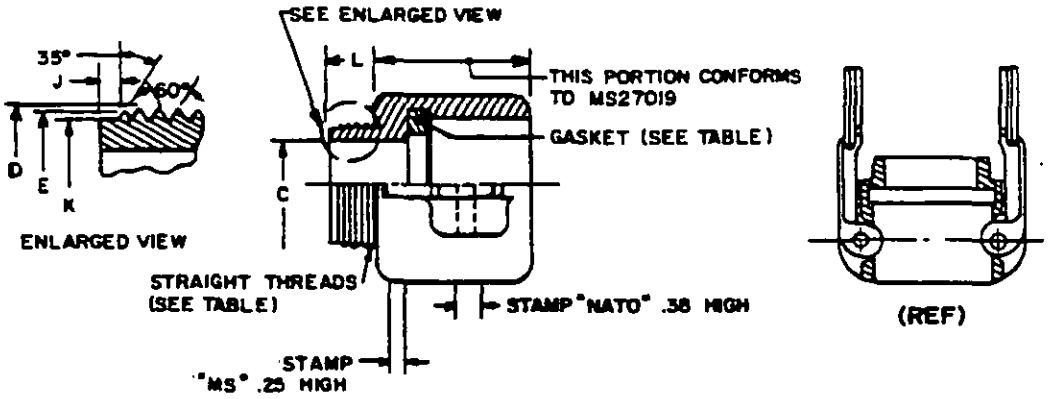

DASH NUMBER	NOMINAL SIZE	THDS PER INCH	THD TYPE	MAJOR DIA D MAX	MAJOR DIA D MIN	PITCH DIA E MAX	PITCH DIA E MIN	MINOR DIA K MAX	LGTH OF NIPPLE L	LGTH OF PILOT J	INSIDE DIA C	GASKET REQUIRED
-1	3/4	14	NPSH	1.0353	1.0213	0.9889	0.9819	0.9425	.56	.12	.78	MS27030-2
-2	1	11-1/2	NPSH	1.2951	1.2781	1.2386	1.2301	1.1821	.56	.16	.88	MS27030-3
-3	1-1/2	11-1/2	NPSH	1.8788	1.8618	1.8223	1.8138	1.7658	.62	.16	1.38	MS27030-5
-4	2	11-1/2	NPSH	2.3528	2.3358	2.2963	2.2878	2.2398	.75	.19	1.88	MS27030-6
-5	2-1/2	8	NH	2.8434	2.8212	2.7622	2.7511	2.6810	1	.25	2.38	MS27030-7
-6	3	8	NH	3.4697	3.4475	3.3005	3.3774	3.3073	1.12	.25	2.88	MS27030-8
-7	4	8	NH	4.4683	4.4461	4.3871	4.3760	4.3059	1.12	.25	3.88	MS27030-9
-8	6	8	NH	6.5874	6.5800	6.5060	6.4945	6.4244	1.38	.25	5.88	MS27030-10

(D) DENOTES CHANGES

APPROVED 10 AUGUST 1968 REVISED (A) 3 MARCH 1970 (B) 19 AUGUST 1975 (C) 16 JULY 1980 (D) 15 MAY 1989

User activities :
Army - AV

Review activities :
Army - GL
Air Force - 82
DLA - CS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
ARMY-ME Other Cust NAVY-YD A. F. -99	STANAG NO. 2761 QSTAG 240	COUPLING HALF, QUICK DISCONNECT, CAM-LOCKING TYPE, FEMALE, EXTERNAL STRAIGHT THREADS, TYPE XXVI (FOR USE WITH NATO EQUIPMENT)	MS 70096
PROCUREMENT SPECIFICATIONS MIL-C-27487		SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 87 672 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 4730-0693

AMSC N/A

Source: https://assist.dla.mil -- Downloaded: 2020-10-23T20:25Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 4730

NOTES:

1. MATERIAL
   a. BODY - QQ-C-390, BRASS, ALLOY 836 OR 922, OR BRASS, QQ-B-626, COPPER ALLOY 377.
   b. ARMS, CAM - QQ-C-390, BRASS, ALLOY 836, 844 OR 862; OR BRASS, QQ-B-626, COPPER ALLOY 377.
   c. PINS, CAM - QQ-S-763, CRES, CLASS 304 OR 316, CONDITION A, FORM ROUND OR ASTM A582 TYPE 303SE, CONDITION A, FORM ROUND.
   d. RINGS, WIRE - SPRING STEEL, OR STAINLESS STEEL, ASTM A313, TYPE 304.
2. FINISH
   a. BODY - MIL-F-495, BLACK CHEMICAL FINISH.
   b. ARMS, CAM - PLAIN.
   c. RINGS - QQ-P-416, CADMIUM PLATE, TYPE II, CLASS 1, FOR CARBON STEEL WIRE ONLY.
   d. PINS, CAM - CRES OR STAINLESS STEEL SHALL BE PASSIVATED PER ASTM A380.
3. THREADS - THREADS SHALL BE AMERICAN NATIONAL HOSE COUPLING (NPSH) OR AMERICAN NATIONAL FIRE HOSE COUPLING (NH) AS SPECIFIED IN TABLE AND CONFORMING TO FED-STD-H28/10.
4. BURRS AND ALL FOREIGN MATERIAL SHALL BE REMOVED.
5. HYDROSTATIC TEST PRESSURE - 3/4 THROUGH 4 INCH, 300 P.S.I.; 6 INCH, 150 P.S.I.
6. WORKING PRESSURE - 3/4 THROUGH 4 INCH, 150 P.S.I.; 6 INCH, 75 P.S.I.
7. (D) DIMENSIONS - IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCE ±.02 AND ± 1/2°.
8. PART NUMBER - THE MS PART NUMBER CONSISTS OF THE MS SHEET NUMBER PLUS THE DASH NUMBER. EXAMPLE: MS70096-1.
9. (D) REFERENCED GOVERNMENT DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.
10. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER ACQUISITION DOCUMENTS REFERENCED HEREIN.
11. (D) IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
12. (D) ORDERING DATA SHALL INCLUDE:
    a. STAINLESS STEEL PULL RING, IF REQUIRED, OR
    b. CADMIUM PLATED STEEL PULL RING.

NOTE: CERTAIN PROVISIONS (DIMENSIONS) OF THIS DOCUMENT ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT (STANAG NO. 2761 AND QSTAG 240). WHEN CHANGE NOTICE, REVISION, OR CANCELLATION OF THIS DOCUMENT IS PROPOSED WHICH WILL AFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY SHALL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.

APPROVED 10 AUGUST 1968 REVISED (D) FOR CHANGES SEE SHEETS 1 AND 2

(D) DENOTES CHANGES

P.A. ARMY-ME Other Cust NAVY - YD AF - 99	INTERNATIONAL INTEREST STANAG NO. 2761 QSTAG 240	TITLE COUPLING HALF, QUICK DISCONNECT, CAM-LOCKING TYPE, FEMALE, EXTERNAL STRAIGHT THREADS, TYPE XXII (FOR USE WITH NATO EQUIPMENT)	MILITARY STANDARD MS 70096
Procurement Specifications MIL-C-27487		SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 MAY 73 672-1 COORDINATED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23120:25Z
Check the source to verify that this is the current version before use.