
SUPERSEDING
MIL-C-55181/1B
7 NOV. 1985

MILITARY SPECIFICATION SHEET
CONNECTOR, PLUG, ELECTRICAL

This specification is approved for use by all Departments and Agencies of the Department of Defense

The complete requirements for acquiring the connector described herein shall consist of this specification sheet and the latest issue of MIL-C-5516..

CONNECTOR ASSEMBLY

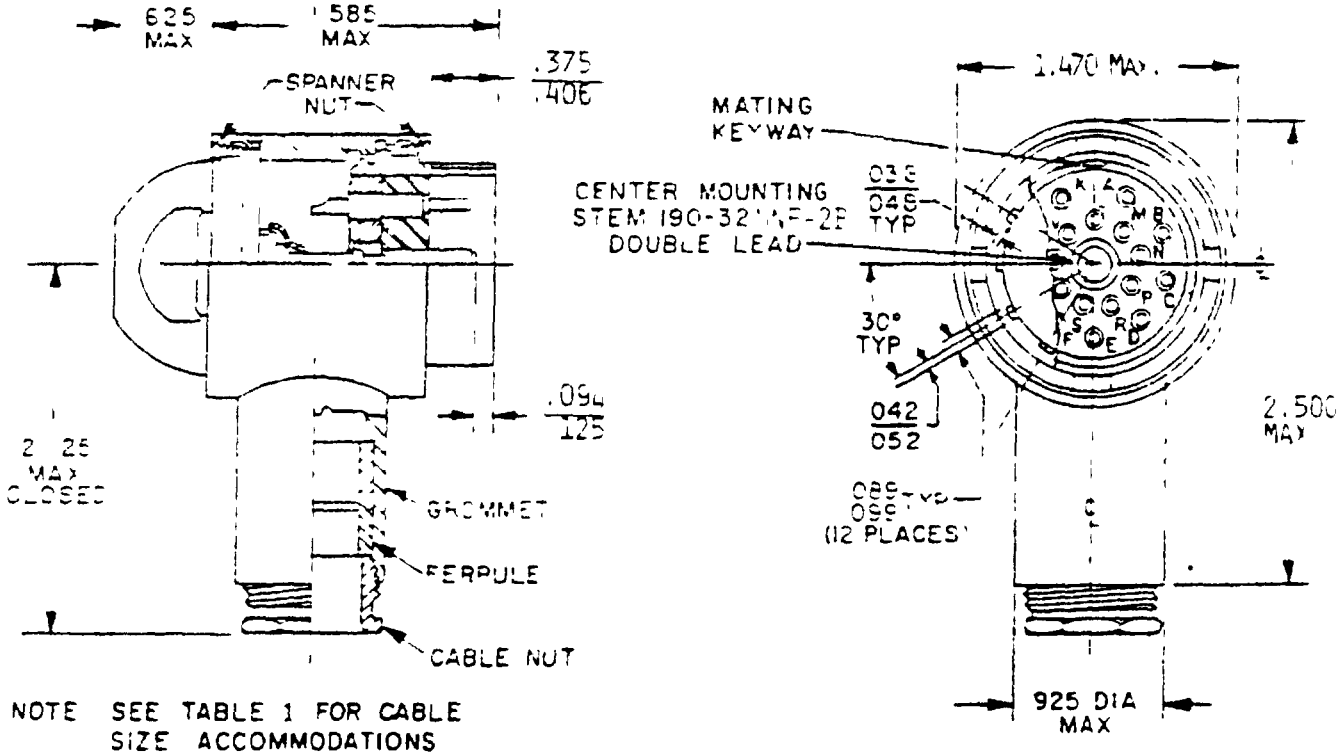


NOTE SEE TABLE 1 FOR CABLE SIZE ACCOMMODATIONS

FSC-5935

AMSC N A

DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:35Z
Check the source to verify that this is the current version before use.

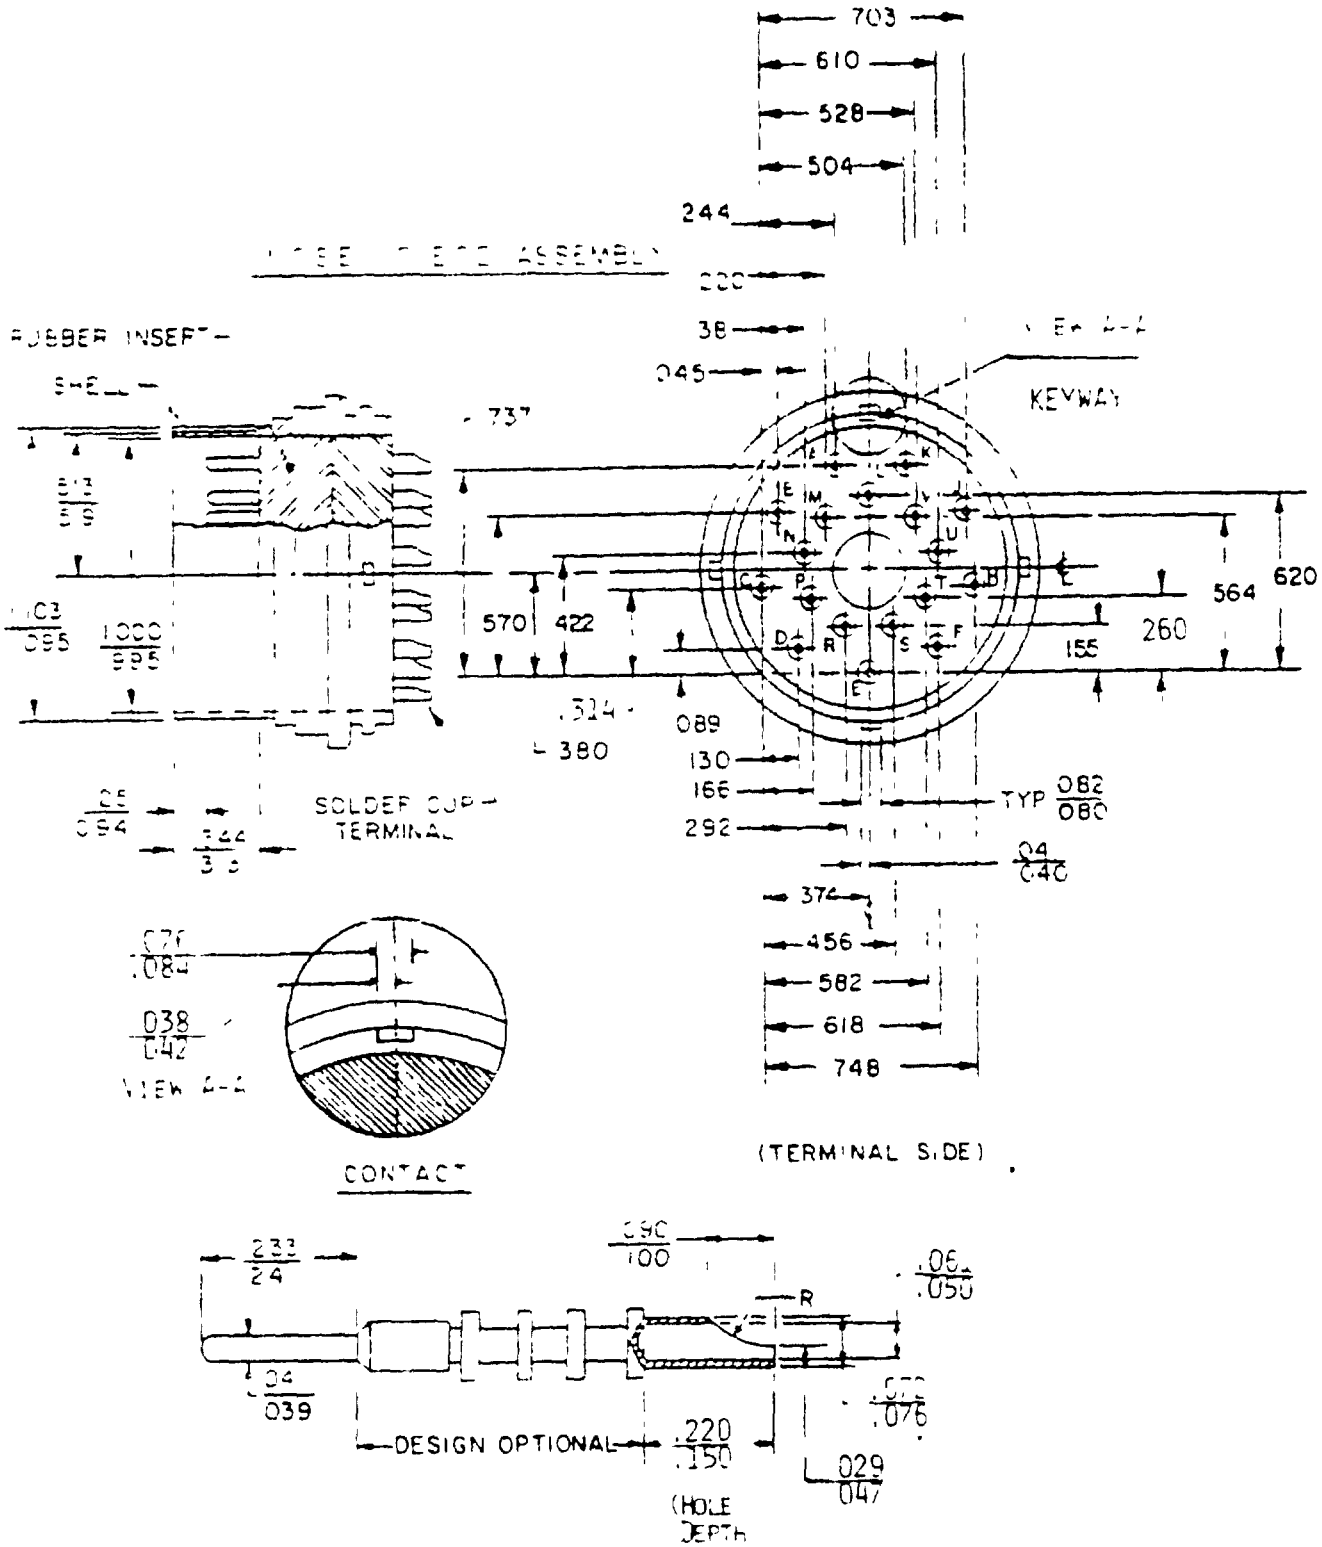

NOTES.

1. DIMENSIONS ARE IN INCHES
2. DIMENSIONAL TOLERANCE SHALL BE ± .002 UNLESS OTHERWISE SPECIFIED
3. ANGULAR TOLERANCE SHALL BE ± 30 MIN UNLESS OTHERWISE SPECIFIED

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:35Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration

Gages See drawing SC-GL-323138

Mating connector M55181/8-01

Contact current rating 7.5 amperes

Part number M55181/7-dash number from table I)

TABLE I. Dash number cross reference, and intermating table

New mil P/N	1/ Type designator	Cable size accomodation		Mates with	
		Min	Max	New mil P/N	1/ Type designator
M55181/7-01	MW10M(M)D11	.292	.343	M55181/8-01	MW20F(M)D00
M55181/7-02	MW10M(M)D13	.323	406	M55181/8-01	MW20F(M)D00
M55181/7-03	MW10M(M)D 17	448	.531	M55181/8-01	MW20F(M)D00
M55181/7-04	MW10M(M)D 19	.511	593	M55181/8 01	MW20F(M)D00
M55181/7-05	MW10M(M)D15	.38E	.46E	M55181/8-01	MW20F(M)D00

1/ This type designator shall not be referenced for procurement purposes

Custodians
Army CR
Navy EC
Air Force 85

Review activities
Army -
Navy -
Air Force - 11, 99
DLA - ES

Preparing activity
Army CR

(PROJECT 5935-3569-07)

U S GOVERNMENT PRINTING OFFICE: 1986 - 605-031/43577

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:35Z
Check the source to verify that this is the current version before use.