
FED. SUP CLASS 5310

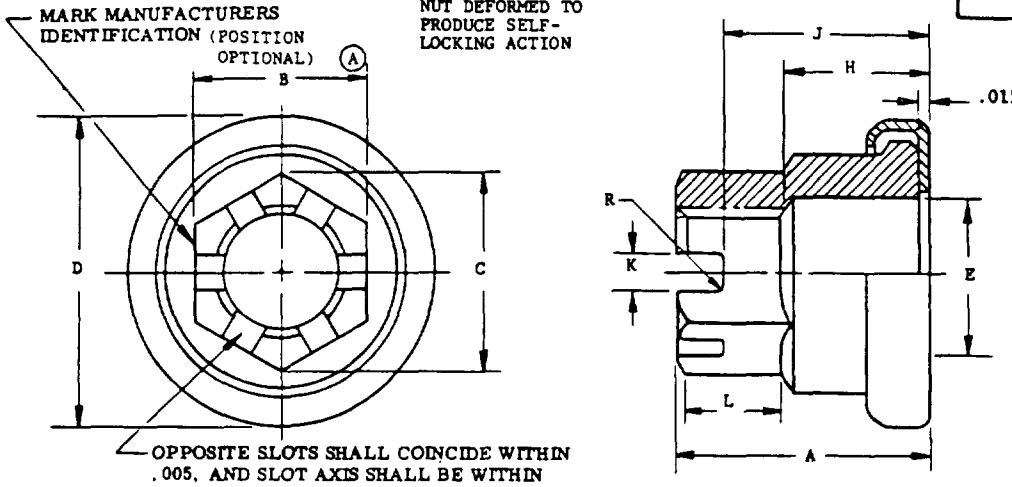


| SIZE DASH NO. | (a) THREAD | A | | B | | C | D | (b)(c) E DIA | | H | | J | | K | L |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | MAX | MIN | MAX | MIN | MIN | ±.015 | MAX | MIN | MAX | MIN | MAX | MIN | ±.015 | MIN |
| -3 | .1900-32UNJF-3B | .374 | .344 | .252 | .243 | .277 | .475 | .240 | .230 | .161 | .141 | .279 | .259 | .065 | .110 |
| -4 | .2500-28UNJF-3B | .405 | .375 | .316 | .306 | .347 | .545 | .309 | .299 | .192 | .172 | .316 | .296 | .085 | .125 |
| -5 | .3125-24UNJF-3B | .436 | .406 | .378 | .367 | .419 | .625 | .395 | .385 | .223 | .203 | .347 | .327 | | |
| -6 | .3750-24UNJF-3B | .482 | .452 | .440 | .430 | .491 | .695 | .460 | .450 | .238 | .218 | .378 | .358 | | .130 |
| -7 | .4375-20UNJF-3B | .513 | .483 | .504 | .494 | .562 | .770 | .529 | .519 | .269 | .249 | .409 | .389 | .140 | .130 |
| -8 | .5000-20UNJF-3B | .576 | .546 | .566 | .556 | .633 | .910 | .614 | .604 | .301 | .281 | .472 | .452 | | .150 |
| -9 | .5625-18UNJF-3B | .670 | .640 | .692 | .680 | .775 | 1.065 | .686 | .676 | .332 | .312 | .550 | .530 | | .165 |
| -10 | .6250-18UNJF-3B | .819 | .789 | .755 | .743 | .846 | 1.128 | .758 | .748 | .406 | .386 | .633 | .613 | | .185 |
| -12 | .7500-16UNJF-3B | .951 | .921 | .880 | .868 | .987 | 1.268 | .915 | .905 | .450 | .430 | .765 | .745 | .171 | .220 |
| -14 | .8750-14UNJF-3B | 1.058 | 1.028 | 1.005 | .993 | 1.130 | 1.480 | 1.065 | 1.055 | .495 | .475 | .871 | .851 | | .288 |
| -16 | 1.0000-12UNJF-3B | 1.202 | 1.162 | 1.130 | 1.118 | 1.272 | 1.692 | 1.215 | 1.205 | .544 | .524 | .984 | .964 | | .333 |

(a) THREADS PER MIL-S-8879
(b) CONCENTRICITY: "E" DIAMETER TO BE CONCENTRIC TO THREAD P. D. WITHIN .005 TIR
(c) WASHER I. D. MAY BE .005 LESS THAN "E" MIN.

| SIZE DASH NO. | R MAX | ULTIMATE TENSILE STRENGTH LB. MIN | MAX WEIGHT LB/100 |
|---|---|---|---|
| -3 | .035 | 1,230 | .62 |
| -4 | | 2,290 | .81 |
| -5 | | 3,700 | 1.00 |
| -6 | .053 | 5,720 | 1.30 |
| -7 | | 7,720 | 1.60 |
| -8 | | 10,550 | 2.50 |
| -9 | .062 | 13,400 | 4.40 |
| -10 | | 17,060 | 5.60 |
| -12 | | 25,010 | 7.20 |
| -14 | | 34,220 | 11.00 |
| -16 | | 45,000 | 14.00 |

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL, EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.

(A) DENOTES CHANGES

APPROVED 7 DEC 73 REVISED (A) 30 NOV 88

P.A.
NAVY - AS
Other Cust
USAF - 99
ARMY - AV

TITLE
NUT, SELF-LOCKING, CASTELLATED, HEXAGON, C'BORED, CAPTIVE WASHER, 450° F

MILITARY STANDARD
MS14146

PROCUREMENT SPECIFICATION
*MIL-N-25027

SUPERSEDES

SHEET 1 OF 2

DD FORM MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PLATE NO 23085

PROJECT NO. 5310-1298

AMSC N/A

DISTRIBUTION STATEMENT A: APPROVED FOR PUBLIC RELEASE. DISTRIBUTION IS UNLIMITED. This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

REVIEWER SYMBOLS:

USER SYMBOLS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:35Z
Check the source to verify that this is the current version before use.

USER SYMBOLS:
REVIEWER SYMBOLS:
"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

FED. SUP CLASS
5310

NOTES:

(A) 1. MATERIAL: NUT - STEEL UNS G10420 (AISI C1042)
WASHER - CRES UNS S30200 (AISI 302) PER AMS 5515, 5516, 5636, 5637, 5688
UNS S32100 (AISI 321) PER AMS 5510, 5557, 5559, 5570, 5645, 5689

2. PROTECTIVE TREATMENT: NUT-CADMIUM PLATE PER QQ-P-416,
PLUS MOLYBDENUM DISULFIDE DRY FILM
LUBRICANT, PLATING TYPE AND CLASS OPTIONAL
IF THE NUTS MEET SALT SPRAY REQUIREMENT OF
QQ-P-416, TYPE II.
WASHER - PASSIVATE IN ACCORDANCE WITH QQ-P-35.

3. THREADED ELEMENT SHALL ROTATE FREELY IN AND AGAINST THE WASHER.

4. BREAK ALL SHARP EDGES AND REMOVE BURRS AND SLIVERS.

5. SURFACE TEXTURE IN ACCORDANCE WITH ANSI B46.1 SHALL NOT EXCEED 125 MICRO INCHES.

6. DIMENSIONS IN INCHES.

7. THESE NUTS ARE FOR USE WITH SELF-RETAINING SHEAR BOLTS AND MAY BE USED AT TEMPERATURE 450°F AND BELOW. FOR DESIGN USAGE LIMITATIONS SEE MS33602. NUTS ARE TO BE INSTALLED IN ACCORDANCE WITH MS33540.

* 8. PERFORMANCE: PER MIL-N-25027, EXCEPT NUTS SHALL MEET THE LOCKING TORQUE REQUIREMENTS OF MIL-N-25027 FOR 5 CYCLES AT ROOM TEMPERATURE AND AFTER BAKE AT 450°F WHEN TESTED ON BOLTS OR STUDS CROSS DRILLED IN THREADS PER NAS 1103 SERIES.

EXAMPLE OF PART NUMBER.

MS14146-4 = .2500-28 NUT, CADMIUM PLATED WITH CRES, CAPTIVE WASHER.

9. QUALIFIED PRODUCTS: ONLY NUTS FOR WHICH THERE ARE QUALIFIED PRODUCTS LISTED ON QPL 25027 SHALL BE USED FOR DESIGN.

(A) BIDS SHALL BE SOLICITED ONLY FROM THE MANUFACTURERS OR DISTRIBUTORS LISTED ON QPL-25027.

APPROVED 7 DEC 73 REVISED (A) FOR CHANGES SEE SHEET 2

AMSC N/A
DISTRIBUTION STATEMENT A: APPROVED FOR PUBLIC RELEASE. DISTRIBUTION IS UNLIMITED.
This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

| | | |
|---|---|---|
| P.A.<br>NAVY - AS<br>Other Cust<br>USAF - 99<br>ARMY - AV | TITLE<br>NUT, SELF-LOCKING, CASTELLATED, HEXAGON, C'BORED, CAPTIVE WASHER.<br>450 F | MILITARY STANDARD<br>MS14146 |
| PROCUREMENT SPECIFICATION<br>* MIL-N-25027 | SUPERSEDES | SHEET 2 OF 2 |

DD FORM 1 MAR 72 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE PLATE NO. 23085

☆ U.S. GOVERNMENT PRINTING OFFICE:1989 604-033/11945

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:35Z
Check the source to verify that this is the current version before use.