THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-N-25027

DD Form 672, MAY 88 — PREVIOUS EDITIONS ARE OBSOLETE

PREPARING ACTIVITY: DLA-IS
CUSTODIANS: ARMY-AV, NAVY-AS, AIR FORCE-11, DLA-
REVIEW: 82
USER: CR, MI
PROJECT NUMBER: 5310-1907
DISTRIBUTION STATEMENT: A. Approved for public release; distribution is unlimited

(F) DENOTES CHANGE(S)

INCH-POUND

MILITARY SPECIFICATION SHEET

TITLE: NUT, SELF-LOCKING, PLATE, ONE LUG, FLOATING NON-METALLIC INSERT, (F) STEEL, 125 KSI FTU, 250°F

SPECIFICATION SHEET NUMBER: MS21082
SUPERSEDING: MS21082 E, 20 APR 83 (SEE NOTE 8)
AMSC- N/A
FSC 5310
1 SEP 83
REV F

Page 1 of 2

Form Approved OMB No 0704-0188

CONFIGURATION OF NUT OPTIONAL WITHIN THE LIMITATIONS IMPOSED BY DIMENSIONS AND REQUIREMENTS SPECIFIED HEREIN

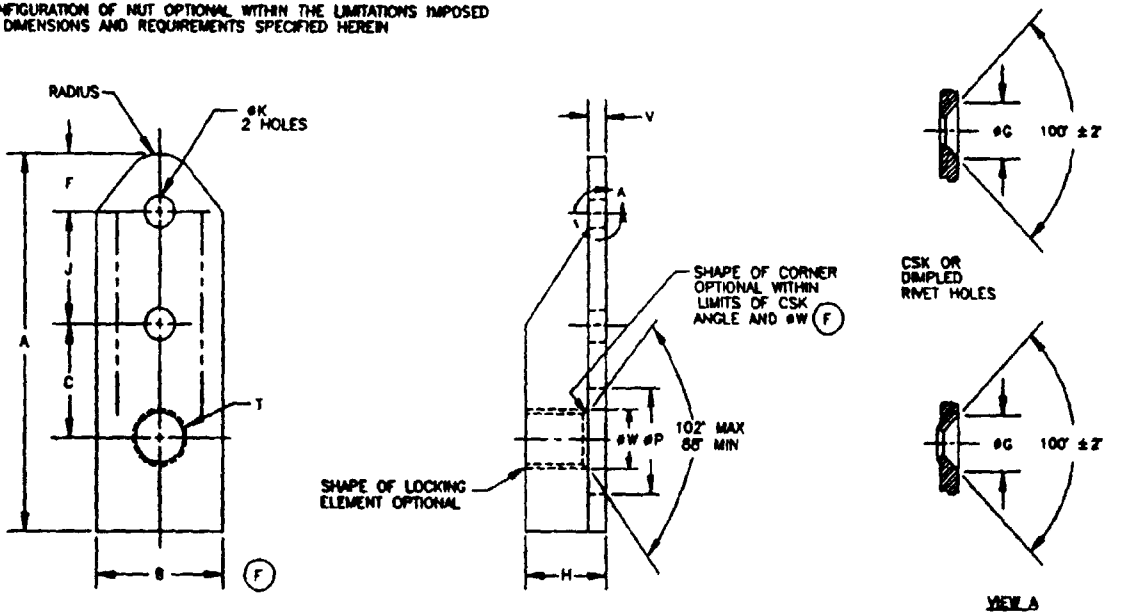


TABLE I DASH NUMBERS AND DIMENSIONS

DASH NUMBER		T	A	B	C	F	øG	H		J	1/ øK	øP		V	øW (F)	AXIAL STRENGTH LBS/MIN	WEIGHT LBS/100
PLAIN HOLES	CSK OR DIMPLED HOLES	THREAD SIZES	MAX	MAX	± 005	MIN	± 010	MAX	MIN	± 002	+ 005 − 000	MAX	MIN	MAX	MIN		
-04	-04K	112-40 UNJC-3B	1 094	422	344	115	200	218	133	312	098	270	172	075	112	750	55
-06	-06K	138-32 UNJC-3B	1 094	422	344	115	200	234	160	312	098	270	198	.075	136	1,130	56
-08	-08K	164-32 UNJC-3B	1 094	422	344	115	200	312	234	312	098	270	224	.075	164	1,720	80
-3	-3K	190-32 UNJF-3B	1 094	422	344	115	200	312	234	312	098	270	250	075	190	2,480	60
-4	-4K	250-28 UNJF-3B	1 316	531	.500	115	200	.387	283	312	098	330	310	075	250	4,580	1 20
-5	-5K	.3125-24 UNJF-3B	1 378	641	500	115	230	.387	.283	312	130	.393	373	075	312	7,380	2.20
-6	-6K	375-24 UNJF-3B	1 422	703	500	125	230	479	445	312	130	487	438	075	375	11,450	2 80
-8	-8K	.500-20 UNJF-3B	1 800	859	825	125	230	630	595	500	181	550	500	075	500	15,450	4 00

1/ DIMPLED RIVET HOLE TOLERANCE FOR "øK" IS + 015 − 000

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:26Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-N-25027

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

Form Approved
OMB No. 0704-0188

REQUIREMENTS.

1 MATERIAL.
NUT - STEEL, COMPOSITIONS 1035 (UNS G10350), 1040 (UNS G10400) AND 1050 (UNS G10500)
(F) IN ACCORDANCE WITH ASTM A827 AMS 5085 AND QQ-S-700 1008 (UNS G10080), 1042 (UNS G10420), IN ACCORDANCE WITH ASTM A29, 1137 (UNS G11370), IN ACCORDANCE WITH AMS 5024
ALLOY STEEL, GRADES 4130 (UNS G41300) 4340 (UNS G43400) AND 8740 (UNS G87400) IN ACCORDANCE WITH ASTM A29
(F) RETAINER - CARBON STEEL, COMPOSITION 1035 (UNS G10350), 1050 (UNS G10500) IN ACCORDANCE WITH ASTM A827, AMS 5085 AND QQ-S-700
(F) NON-METALLIC INSERT - NYLON OR EQUIVALENT

2 FINISH. CADMIUM PLATE IN ACCORDANCE WITH QQ-P-416, TYPE II, CLASS 2

3 DIMENSIONING AND TOLERANCING. DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14.5M

4 HARDNESS. 35HRC, MAX

5 THREADS. THREADS IN ACCORDANCE WITH MIL-S-8879

6 SURFACE TEXTURE. SURFACE TEXTURE, UNLESS OTHERWISE SPECIFIED SHALL NOT EXCEED 125 MICROINCHES, IN ACCORDANCE WITH ANSI/ASME B46 1

7 VIBRATION LIFE. MINIMUM VIBRATION LIFE REQUIREMENT SHALL BE THREE TIMES AVERAGE VIBRATION LIFE IN ACCORDANCE WITH PROCUREMENT SPECIFICATION

8 EDGES. BREAK ALL SHARP EDGES AND REMOVE ALL BURRS

9 FLOAT. FLOAT OF THE NUT PORTION OF ASSEMBLY SHALL NOT BE LESS THAN .030 LATERALLY AND LONGITUDINALLY FROM CENTERED POSITION NUT BODY SHALL BE CAPABLE OF ENGAGEMENT WITH A BOLT IN MAXIMUM MISALIGNED POSITION MAXIMUM AXIAL FLOAT .020 INCHES FOR 190 AND SMALLER .030 FOR 250 AND LARGER NUT MISALIGNMENT SHALL NOT EXCEED DIMENSION "B" THE NUT AND BASE PORTION OF THE ASSEMBLY SHALL FORM ONE INTEGRAL UNIT AND THE ASSEMBLY SHALL PROVIDE A BEARING SURFACE FOR THE NUT

10 PART NUMBER. THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I
EXAMPLE MS21082-4

- DASH NUMBER
- BASIC MS NUMBER

MS21082-4 INDICATES NUT, SELF-LOCKING PLATE ONE LUG, FLOATING, NON-METALLIC INSERT STEEL, 125 KSI Ftu, 250°F, 250-28 UNJF-3B, PLAIN HOLES

NOTES

1 ALL DIMENSIONS ARE IN INCHES

2 IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.

3 REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN

4 DESIGN AND USAGE LIMITATIONS THESE NUTS ARE DESIGNED TO DEVELOP THE TENSILE STRENGTH OF BOLTS AND SCREWS WITH AN ULTIMATE TENSILE STRENGTH OF 125 KSI BASED ON THE CROSS SECTION AREA AT THE BASIC ROOT DIAMETER OF THE THREADS THESE NUTS ARE DESIGNED TO BE USED ON 3A EXTERNAL THREADS THESE NUTS SHALL BE USED IN ACCORDANCE WITH THE LIMITATIONS OF MS33588 ONLY NUTS FOR WHICH THERE ARE QUALIFIED PRODUCTS LISTED ON QPL 25027 SHALL BE USED

(F) 5 MS21082 SUPERSEDES NAS1032

INTERCHANGEABILITY RELATIONSHIP

MS21082 NUTS CAN UNIVERSALLY REPLACE NAS1032 NUTS OF LIKE MATERIAL, THREAD SIZE, AND FASTENING METHOD (PLAIN RIVET HOLES, DIMPLED OR COUNTERSUNK RIVET HOLES) BUT THESE NAS1032 NUTS CANNOT UNIVERSALLY REPLACE MS21082 NUTS.

INTERCHANGEABILITY TABLE

CANCELLED PART NUMBERS	SUBSTITUTIVE PART NUMBERS
NAS1032N04	MS21082-04
NAS1032N04K	MS21082-04K
NAS1032N06	MS21082-06
NAS1032N06K	MS21082-06K
NAS1032N08	MS21082-08
NAS1032N08K	MS21082-08K
NAS1032N3	MS21082-3
NAS1032N3K	MS21082-3K
NAS1032N4	MS21082-4
NAS1032N4K	MS21082-4K
NAS1032N5	MS21082-5
NAS1032N5K	MS21082-5K
NAS1032N6	MS21082-6
NAS1032N6K	MS21082-6K
NAS1032N8	MS21082-8
NAS1032N8K	MS21082-8K

PREPARING ACTIVITY DLA-IS
CUSTODIANS ARMY-AV NAVY-AS
AIR FORCE-11 DLA-
REVIEW 82
USER CR, MI
PROJECT NUMBER 5310-1907

MILITARY SPECIFICATION SHEET

TITLE
NUT, SELF-LOCKING, PLATE, ONE LUG, FLOATING, NON-METALLIC INSERT, (F) STEEL, 125 KSI Ftu, 250°F

SPECIFICATION SHEET NUMBER
MS21082 1 SEP 93 REV F

SUPERSEDING
MS21082 E 20 APR 93 (SEE NOTE 5)

AMSC- N/A FSC 5310

DISTRIBUTION STATEMENT
A. Approved for public release, distribution is unlimited.

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:26Z
Check the source to verify that this is the current version before use.