
FED. SUP CLASS
3120

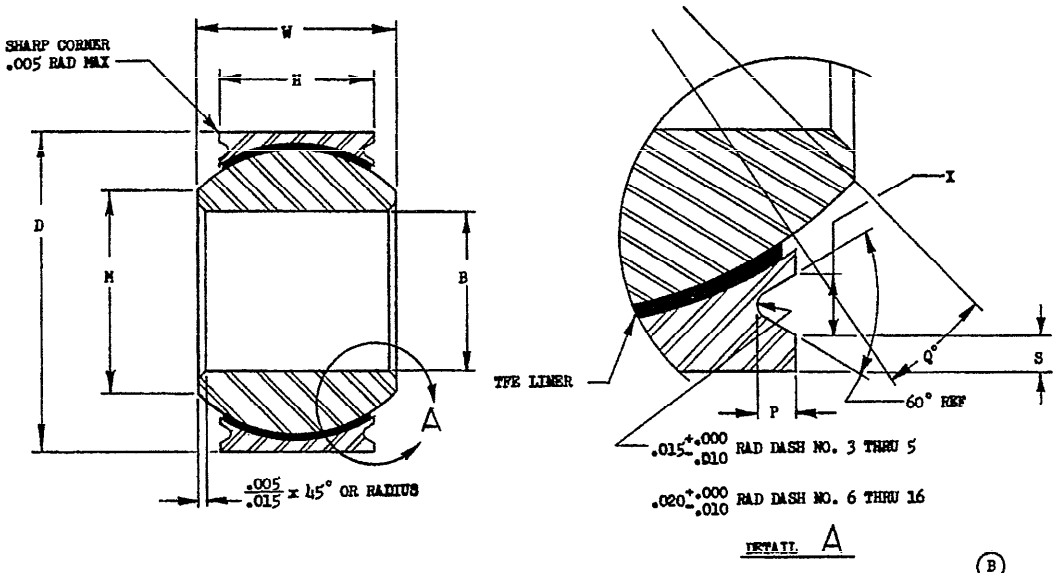

DASH NO	B +.0000 -.0005	D +.0000 -.0005	H ±.005	M MIN	P +.000 -.015	Q MIN	S +.000 -.010	W +.000 -.002	X +.000 -.010	STATIC LIMIT LOAD RADIAL LB	STATIC LIMIT LOAD AXIAL LB	OSCILLATING LOAD LB	NO LOAD BREAKAWAY TORQUE IN LB	WT LB MAX
3	.1900	.6250	.327	.300	.030	15	.020	.437	.045	9000	1770	3770	.5-5	.031
4	.2500													
5	.3125	.6875	.317	.360		14				9400	1640	4650		.035
6	.3750	.8125	.406	.466	.040	8	.030	.500	.055	13700	2630	6390	1-5	.060
7	.4375	.9375	.442	.537		10		.562		20700	3650	9390		.080
7A	.4375	.9062	.442	.537		10		.562		20700	3650	9390		.080
8	.5000	1.0000	.505	.607		9		.625		27500	4970	12150		.100
9	.5625	1.1250	.536	.721		10		.687		34400	5370	14900		.135
10	.6250	1.1875	.567	.747		12		.750		39000	6130	16700		.160
12	.7500	1.3750	.630	.845		13		.875		52300	7730	22100		.240
14	.8750	1.6250	.755	.995	.060	6		.875	.080	67300	10800	28200		.350
16	1.0000	2.1250	1.005	1.269		12		1.375		137000	19300	53700	2-8	.970

MATERIAL: BALL 440C AMS 5630

OUTER RING AMS 5643 (17-4PH), AMS 5528 (17-7PH), AISI 410

LINER - SEE PROCUREMENT SPECIFICATION.

FINISH: SURFACE FINISH BALL DIA RHR 8 MAX: BORE, BALL FACE, AND OUTER RACE DIA RHR 32 MAX: ALL OTHER RHR 125 MAX.

HARDNESS: BALL 55-62 Rc OUTER RING Rc 23 MIN Rc 35 MAX.

NOTES: DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010 ANGLES ± 1/2°
BREAK SHARP EDGES AND CORNERS AND REMOVE ALL BURRS AND SLIVERS UNLESS NOTED.

DASH NUMBER DESIGNATES NOMINAL BORE DIAMETER IN SIXTEENTHS OF AN INCH.

EXAMPLE OF PART NO. MS21230-7 = 7/16 BORE

WHEN TESTED IN DE-ICING FLUID THE OSCILLATING LOAD SHALL BE DECREASED TO 80%.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

Review activities: Navy - AS
USAF - 11, 84

APPROVED 16 Mar 64 — REVISED (A) 15 Nov 65 — (B) 3 Aug 67

This military standard is approved by the Department of the Air Force and the Naval Air Systems Command and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

P.A. NAVY - AS Other Cust USAF - 11	TITLE BEARING, PLAIN, SELF - ALIGNING, GROOVED OUTER RING TFE LINED, WIDE	MILITARY STANDARD MS21230(ASG)
PROCUREMENT SPECIFICATION MIL-B-8942	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. *U.S. GOVERNMENT PRINTING OFFICE: 1967-301-510-/708

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:28Z
Check the source to verify that this is the current version before use.