
Form approved
OMB No. 0704-0188

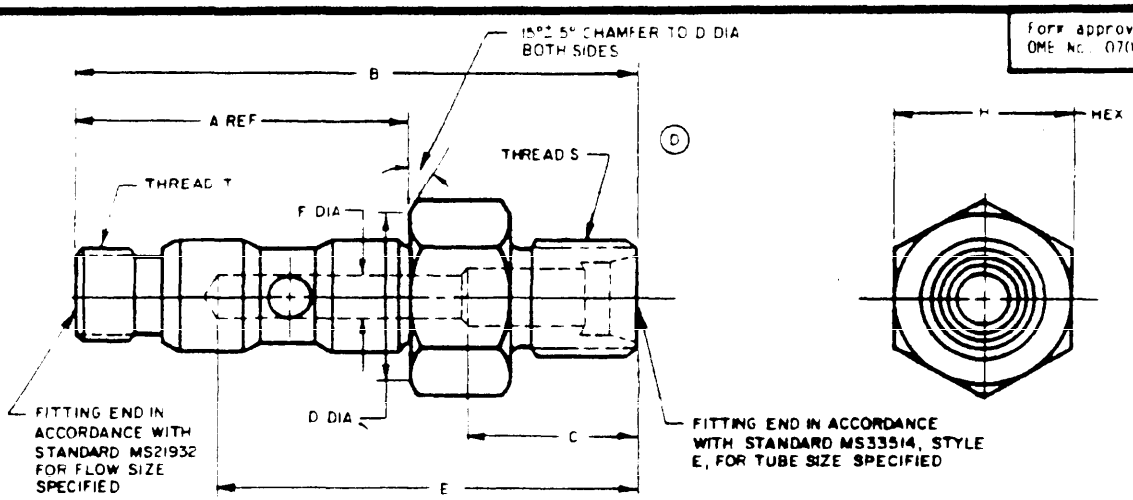

LOW FLOW SIZE DASH NUMBER	TUBE OD	THREAD S MIL-S-8879	THREAD T MIL-S-8879	A REF	B	C ±.062	D +.000 -.015	E ±.062	F ±.003	H HEX	WT LB MAX
-3L	3/16	.3750-24 UNJF-3A	.4375-20 UNJF-3A	1.438	2.172	-----	.621	1.568	.125	.621 / .628	.012
-4L	1/4	.4375-20 UNJF-3A	.4375-20 UNJF-3A	1.438	2.235	-----	.684	1.653	.187	.684 / .691	.014
-5L	5/16	.5000-20 UNJF-3A	.4375-20 UNJF-3A	1.438	2.297	-----	.746	1.715	.234	.746 / .753	.015
-6L	3/8	.5625-18 UNJF-3A	.4375-20 UNJF-3A	1.438	2.344	.663	.871	1.750	.234	.871 / .878	.018
-8L	1/2	.7500-16 UNJF-3A	.4375-20 UNJF-3A	1.438	2.437	.656	.996	1.844	.234	.996 / 1.003	.023

HIGH FLOW SIZE DASH NUMBER	TUBE OD	THREAD S MIL-S-8879	THREAD T MIL-S-8879	A REF	B	C ±.062	D +.000 -.015	E ±.062	F ±.003	H HEX	WT LB MAX
-6H	3/8	.5625-18 UNJF-3A	.5625-18 UNJF-3A	1.688	2.594	-----	.871	1.913	.297	.871 / .878	.016
-8H	1/2	.7500-16 UNJF-3A	.5625-18 UNJF-3A	1.688	2.687	-----	.996	2.030	.422	.996 / 1.003	.025
-10H	5/8	.8750-14 UNJF-3A	.5625-18 UNJF-3A	1.688	2.750	.812	1.121	2.055	.422	1.121 / 1.128	.040

INACTIVE FOR NEW DESIGN AFTER 31 DEC: 1990

REQUIREMENTS:

1. MATERIAL: ALUMINUM ALLOY - BARS. SEE PROCUREMENT SPECIFICATION.

(D) 2. FINISH: SEE PROCUREMENT SPECIFICATION. SURFACE FINISH IN ACCORDANCE WITH ANSI B46.1. UNLESS OTHERWISE NOTED, ALL OUTSIDE MACHINED SURFACES SHALL BE 125 MICROINCHES Ra, AND ALL INSIDE SURFACES SHALL BE 250 MICROINCHES Ra PER ANSI B46.1.

NOTES:

1. FITTINGS SHALL BE FREE FROM ALL HANGING BURRS AND SLIVERS.

2. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010, ANGLES ±1/2°.

3. PART NUMBERS:
   NO CODE LETTER IN PART NUMBER FOR ALUMINUM ALLOY (2024).
   ADD "W" IN PLACE OF DASH FOR ALUMINUM ALLOY (7075).
   EXAMPLES OF PART NUMBERS:
   MS21936-8L - BOLT, 1/2 TUBING, LOW FLOW, ALUMINUM ALLOY (2024).
   MS21938W8L - BOLT, 1/2 TUBING, LOW FLOW, ALUMINUM ALLOY (7075).

4. INSTALLATION IN ACCORDANCE WITH MS21931.

(D) 5. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.

(D) 6. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

(D) DENOTES CHANGES

PREPARING ACTIVITY NAVY - AS
CUSTODIANS ARMY - AV
AIR FORCE - 99
REVIEW USAF - 82, 71 ARMY - AR, DLA - CS
USER: ARMY - GL, CR, ME, AT
PROJECT NUMBER 4730-0982

MILITARY SPECIFICATION SHEET

TITLE: BOLT, CLUSTER FITTING, SINGLE PORT FLAPELESS

SPECIFICATION SHEET NUMBER
MS21938D 16 JAN 1989

SUPERSEDING
MS21938C 26 JUNE 1981

AMSC - N/A FSC: 4730

DISTRIBUTION STATEMENT A
Approved for public release; distribution is unlimited

Page 2 of 2

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

1. REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-F-18280

DD FORM 672 MAY 1988 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 20260-23T14:41Z
Check the source to verify that this is the current version before use.