
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

User activities: Army ME, AM, WC
Navy MC, OS, SH
Air Force

Reviewer activities: Army MI, AT
Navy AS
Air Force 11, 99
DSA-ES

FED SUP CLASS
5935

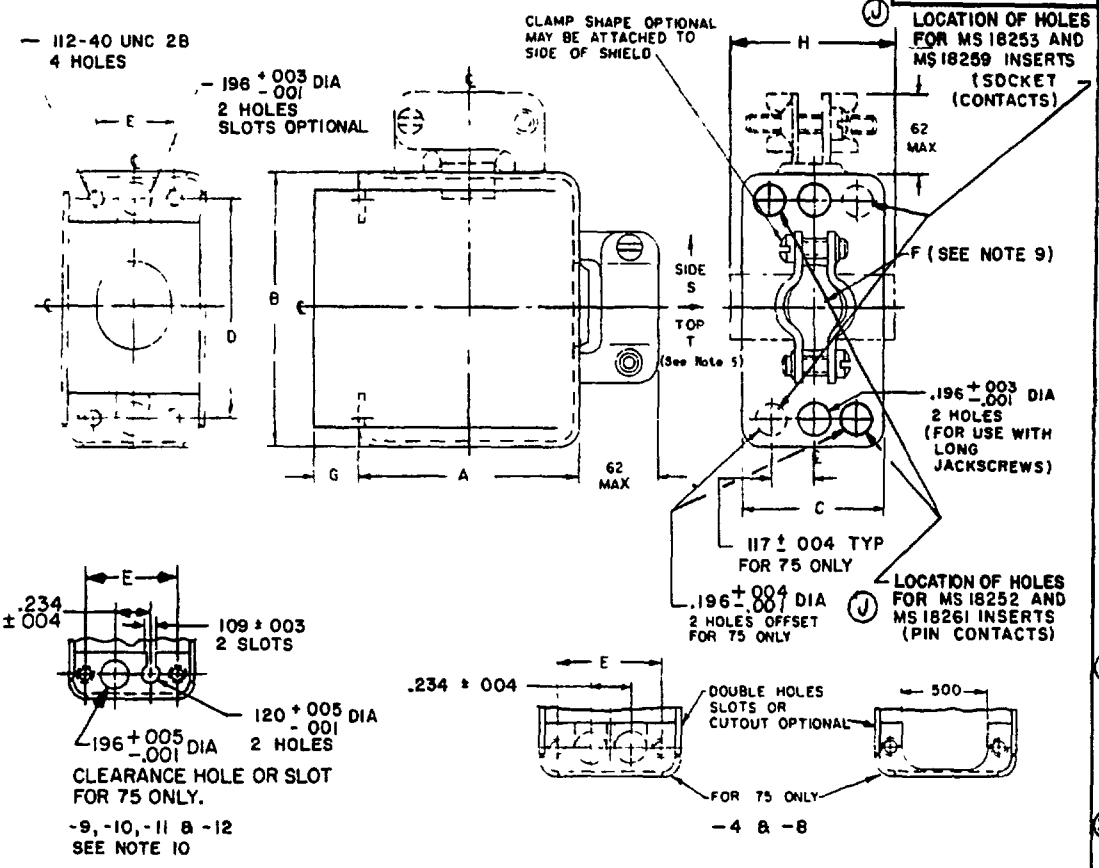

DETAIL - A -

Design standard for use with MIL-C-28748 connectors.

MS PART NO	CONNECTOR SIZE (NO OF CONTACTS)	"A" MIN MAX	"B" ± 016	"C" ± 016	'D ± 005	'E' ± 005	"F" MIN CABLE OPENING SQ INCH	G ± 047
MS24133-T1 MS24133-S1	34	1 22 1 35	2 000	828	1 688	468	34	265
MS24133-T2 MS24133-S2	42	1 22 1 35	2 312	828	2 000	468	34	093
MS24133-T3 MS24133-S3	50	1 22 1 35	2 594	828	2 282	468	34	093
MS24133-T4 MS24133-S4	75	1 22 1 35	2 594	1 188	2 282	766	55	093

The following part numbers are the same as those listed above except the two 196 dia thru holes for mounting the insert are threaded and the other two 196 holes are omitted These parts are not recommended for new design Parts covered by previous issues of this standard but not included in this issue should be procured commercially

(J) denotes changes

APPROVED 12 AUG 1954 REVISED (G) 11 APR 1974 (H) 1 JUN 76 (J) 3 JAN 1979

P A NAVY - EC Other Cust AF-85 ARMY - CR	International Interest	TITLE SHIELD, ELECTRICAL CONNECTOR FOR 34, 42, 50 AND 75 CONTACT RACK AND PANEL CONNECTOR	MILITARY STANDARD MS 24133
Procurement Specification MIL-C-28748		SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5935-3091-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:48Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

User activities: Army ME, AM, WC; Navy MC, OS, SH; Air Force

Reviewer activities: Army MI, AT; Navy AS; Air Force 11, 99; DSA-ES

FED SUP CLASS 5935

MS part number	Connector size (no. of contacts)	Thread size
MS24133-T5 MS24133-S 5	34	.112-40 UNC-2B
MS24133-T6 MS24133-S6	42	112-40 UNC-2B
MS24133-T7 MS24133-S7	50	112-40 UNC-2B
MS24133-T8 MS24133-S8	75	.112-40 UNC-2B

INCHES	MM	INCHES	MM
.001	.03	.468	11.89
.003	.08	.500	12.70
.004	10	.55	14.0
.005	.13	.62	15.7
.016	41	.766	19.46
.047	1.19	.828	21.03
.093	2.36	1 13	28.7
.109	2.77	1.188	30.18
.112	2.84	1.22	31.0
.117	2.97	1.35	31.3
.120	3.05	1.37	34.8
.196	4.98	1.688	42.88
.234	5.94	2.000	50.80
.26	6.6	2.282	57.96
.265	6.73	2.312	58.72
.34	8.6	2 594	65.89
.46	11.7		

MS PART NO	CONNECTOR SIZE (NO OF CONTACTS)	"A" MIN MAX	"B" ± 016	"C" ± 016	"D" ± 005	"E" ± 005	"F" MIN CABLE OPENING SQ INCH	G' ± 047	"H' MAX
MS24133-T9 MS24133-S9	34	1 22 1 35	2 000	828	1 688	468	34	265	1 13
MS24133-T10 MS24133-S10	42	1 22 1 35	2 312	828	2 000	468	34	093	1 13
MS24133-T11 MS24133-S11	50	1 22 1 35	2 594	828	2 282	468	34	093	1 13
MS24133-T12 MS24133-S12	75	1 22 1 35	2 594	1 188	2 282	766	55	093	1 37

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.016 (.41 mm).
3. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
4. For shield with top cable opening suffix part No. with 'T'. For shield with side cable opening suffix part No. with 'S'.
5. Material: Aluminum alloy, per specification QQ-A-250/8, temper H32 .040 (1.02 mm) thick.
6. Finish: Anodize per specification MIL-A-8625, type I or type II.
7. Referenced documents shall be of the issue in effect on date of invitation for bid.
8. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
9. Edges of cable entry hole to be rounded to prevent insulation chafing
10. T9, S9, T10, S10, T11, S11, T12 and S12 are for use with one-piece jackscrews and are not used with shells.

APPROVED 12 AUG 1956 REVISED FOR CHANGES SEE SHEET 1

P A NAVY - EC Other Cust AF 85 ARMY - CR	International Interest	TITLE SHIELD, ELECTRICAL CONNECTOR FOR 34, 42, 50 AND 75 CONTACT RACK AND PANEL CONNECTOR.	MILITARY STANDARD MS 24133
Procurement Specification MIL-C-28748		SUPERSEDES	PAGE 2 OF 2

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5935-3091-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:48Z
Check the source to verify that this is the current version before use.