

FED. SUP CLASS
5945

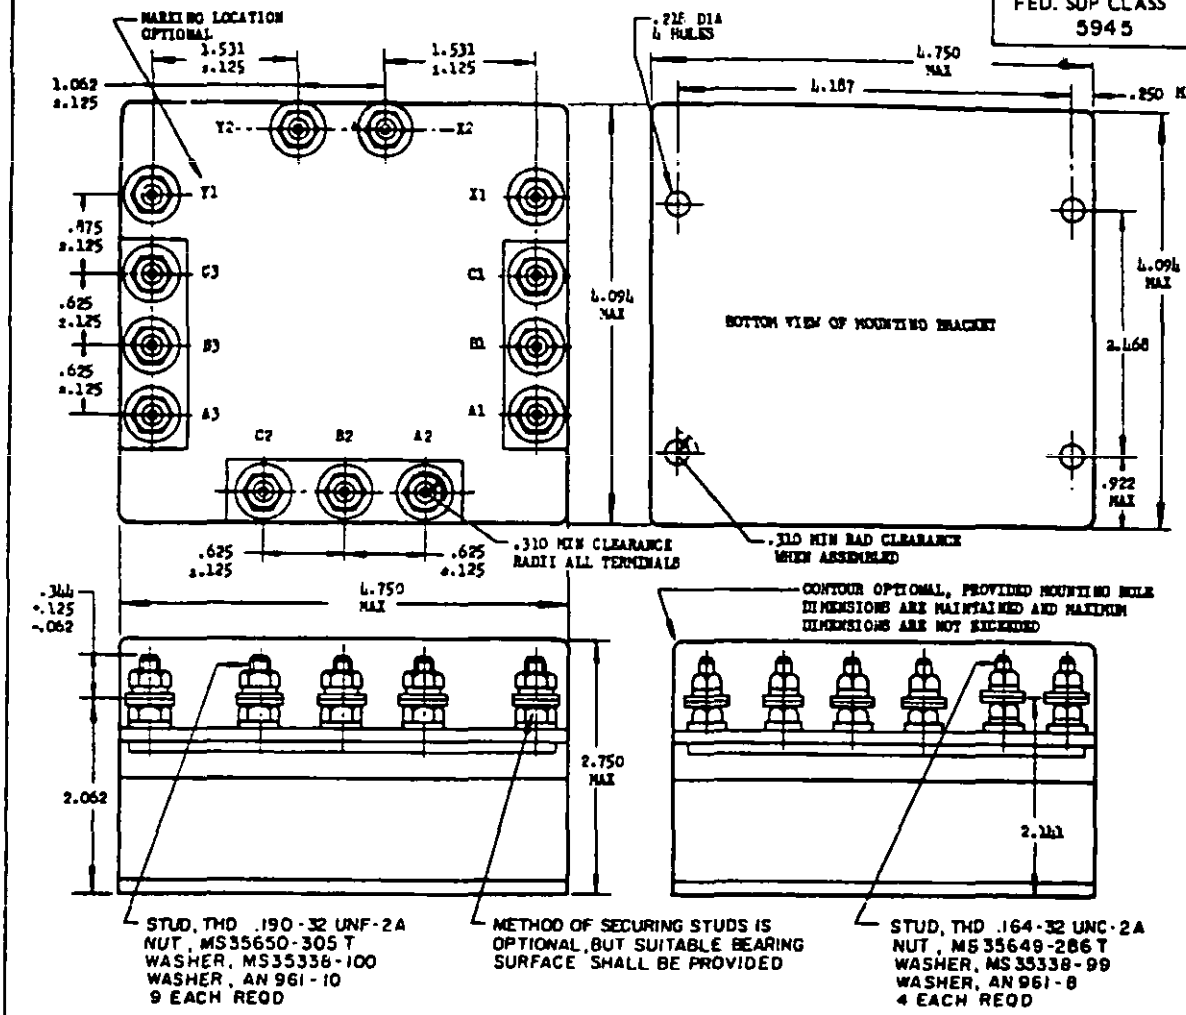

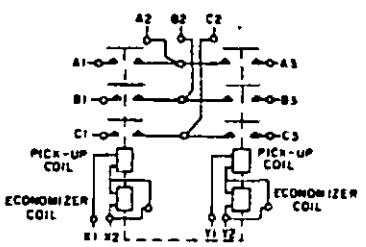

CIRCUIT DIAGRAM (DEENERGIZED POSITION)

NOTES :-

1) DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES :- DECIMALS ±.031
2) ADDITIONAL WASHER MAY BE USED FOR TERMINAL SEAT
3) TERMINAL COVERS AND BARRIERS REQUIRED AT POWER TERMINALS
5) FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN
6) REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID

Ⓖ DENOTES CHANGES

MS PART NUMBER	TYPE	COIL TYPE	TERMINAL TYPE	MOUNTING OR MATING SOCKET	AUXILIARY CONTACTS	MAX WEIGHT IN POUNDS
MS24152-D1	II	DC	STUD	FLANGE	N/A	2.3

P.A AF-85

Other Cust NAVY-AS

TITLE

RELAY, 25 AMP, 3PDT, N.O. TYPE II, NON-HERMETICALLY SEALED (MECHANICALLY INTERLOCKED)

MILITARY STANDARD

MS24152

Procurement Specification MIL-R-6106

SUPERSEDES: AN 3340

PAGE 1 OF 3

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5945-0607-1

APPROVED 20 SEPT 1957 REVISED Ⓔ 19 FEB 1975 Ⓕ 10 Dec 81 Ⓖ 31 AUG 82

User activities: Army, Navy, Air Force

Review activities: USAF - 99, 11
Navy - AS, EC

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:49Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army -
Navy - AS, EC
Air Force - 99, 11

User activities: Army -
Navy -
Air Force -

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

P.A	Procurement Specification
AF-85	MIL-R-6106
Other Cust	International interest
NAVY-AS	
SUPERSEDES:	TITLE: RELAY, 25 AMP, 3PDT, N.O. TYPE II, NON-HERMETICALLY SEALED (MECHANICALLY INTERLOCKED)
PAGE 2 OF 3	MS24152
	MILITARY STANDARD

FED. SUP CLASS 5945

OPERATING CHARACTERISTICS

MS PART NO.	COIL DATA													TIME-MILLISECONDS - MAX 2/					
	Coil	Nominal				Max.			Max Pick-Up Voltage			Drop Out Voltage 1/	Hold Voltage 1/	Operate	Release	Bounce			
		Volts	Freq. Hz	RES Ω In-rush	RES Ω Sly State	Volts	Amps IN RUSH	Amps SS	Normal 1/	High Temp Test	Cent Current Test					Main NO	Main NC	Aux NO	Aux NC
MS24152-01	X1 X2 Y1 Y2	28	DC	22	92	29	1.46	.45	18	21	22.5	1.5	7.0	20	15	2.5	-	-	-

RATED CONTACT LOAD (AMPERES PER POLE) CASE GROUNDED

TYPE OF LOAD	LIFE OPERATING CYCLES X 10^3	28 VDC				115 VAC, 1 PHASE				115/200 VAC, 3 PHASE 3/				See Appropriate Notes
		Main		Aux		Main		Aux		Main		Aux		
		NO	NC	NO	NC	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz	
RESISTIVE	50	25	-	-	-	25	-	-	-	25	-	-	-	
INDUCTIVE	10	25	-	-	-	25	-	-	-	25	-	-	-	
INDUCTIVE														
MOTOR	50	25	-	-	-	25	-	-	-	25	-	-	-	
LAMP														
TRANSFER, LOAD														4/
MECHANICAL LIFE REDUCED CURRENT	100	6.3	-	-	-	6.3	-	-	-	6.3	-	-	-	
MIN CURRENT	50	2.5				2.5				2.5				

APPROVED 20 SEPT 57 REVISED (G) FOR CHANGES SEE PAGE 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:49Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5945

ENVIRONMENTAL CHARACTERISTICS

TEMPERATURE RANGE	-55 TO +71 °C
MAX ALTITUDE RATING	50,000 FT
SHOCK G-LEVEL	25 G
DURATION	6-9 ms
MAX DURATION CONTACT OPENING	2 ms
VIBRATION - SINUSOIDAL (SEE CHART BELOW) G-LEVEL	G
FREQUENCY RANGE	Hz
VIBRATION-RANDOM APPLICABLE SPEC	N/A
POWER SPECTRAL DENSITY RMS G MIN	N/A
FREQUENCY RANGE CURVE	N/A
HIGH SHOCK	N/A
ACCELERATION	10 G

ELECTRICAL CHARACTERISTICS

MIN INSULATION RESISTANCE, INITIAL ..... 100 MEGOHMS
AFTER LIFE OR ENVIRONMENTAL TESTS .... 50 MEGOHMS

DIELECTRIC STRENGTH (SEA LEVEL) ... 2-5 SECONDS

	Initial		After Life Tests	
	28 VDC	115 VAC	28V	115V
COIL TO CASE	1250	N/A	1000	N/A
AUX CONTACTS	1250	N/A	1000	N/A
ALL OTHER POINTS	1250	1500	1000	1125

DIELECTRIC STRENGTH (ALTITUDE) ..... 1 MINUTE

	28VDC	115 VAC
COIL TO CASE	500	N/A
AUX CONTACTS	500	N/A
ALL OTHER POINTS	700	700

MAX CONTACT DROP - INITIAL ..... .150 VOLTS
AFTER LIFE TEST ..... .175 VOLTS

OVERLOAD CURRENT (N.O.) ..... 200 AMPS
RUPTURE CURRENT (N.O.) ..... 250 AMPS
DUTY RATING ..... CONTINUOUS
RFI SPEC .....
(APPLICABLE TO COIL CIRCUITS OF AC OPERATED RELAYS)

NOTES, APPLICATION
1/ Over temperature range.
2/ With nominal coil voltage.
3/ Absence of value indicates relay is not rated for 3 phase applications.
4/ Transfer load indicates relay suitable for transfer between unsynchronized AC power supplies at rating indicated.

DASH NO.	VIBRATION LEVEL				
	5-10 Hz	10-55 Hz	55-250 Hz	250-500 Hz	500-1500 Hz
D1	.08 DA	.06 DA	2Gs	2Gs	

Ⓖ Qualification By Similarity.

Part Number	Loads						Dynamics 1/			Environmental		
	Type 1			Type 1 ER								
	A	B	C	D	E	F	A	X	Y	A	B	C
MS24152-D1	4						2			4		

1/ All units must be tested, reference amendment 1, appendix 1, MIL-R-6106, construction, internal.

APPROVED 20 SEPT 57 REVISED Ⓖ FOR CHANGES SEE PAGE 3

User activities: Army - Navy - Air Force -

Review activities: Army - AS, EC Navy - Air Force - 99, 11

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A AF-85 Other Cust NAVY-AS	International Interest	TITLE RELAY, 25 AMP, 3PDT, N.O. TYPE II NON-HERMETICALLY SEALED (MECHANICALLY INTERLOCKED)	MILITARY STANDARD MS24152
Procurement Specification MIL-R-6106		SUPERSEDES:	PAGE 3 OF 3

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:49Z
Check the source to verify that this is the current version before use.