DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE. DISTRIBUTION IS UNLIMITED
This military standard is approved for use by all Departments &
Agencies of the Department of Defense. Selection for all new
engineering and design applications and for repetitive use shall be
made from this document.
MSC N/A

Review activities: NAVY - AS
USAF - 82
DLA - CS
ARMY - AR, AV

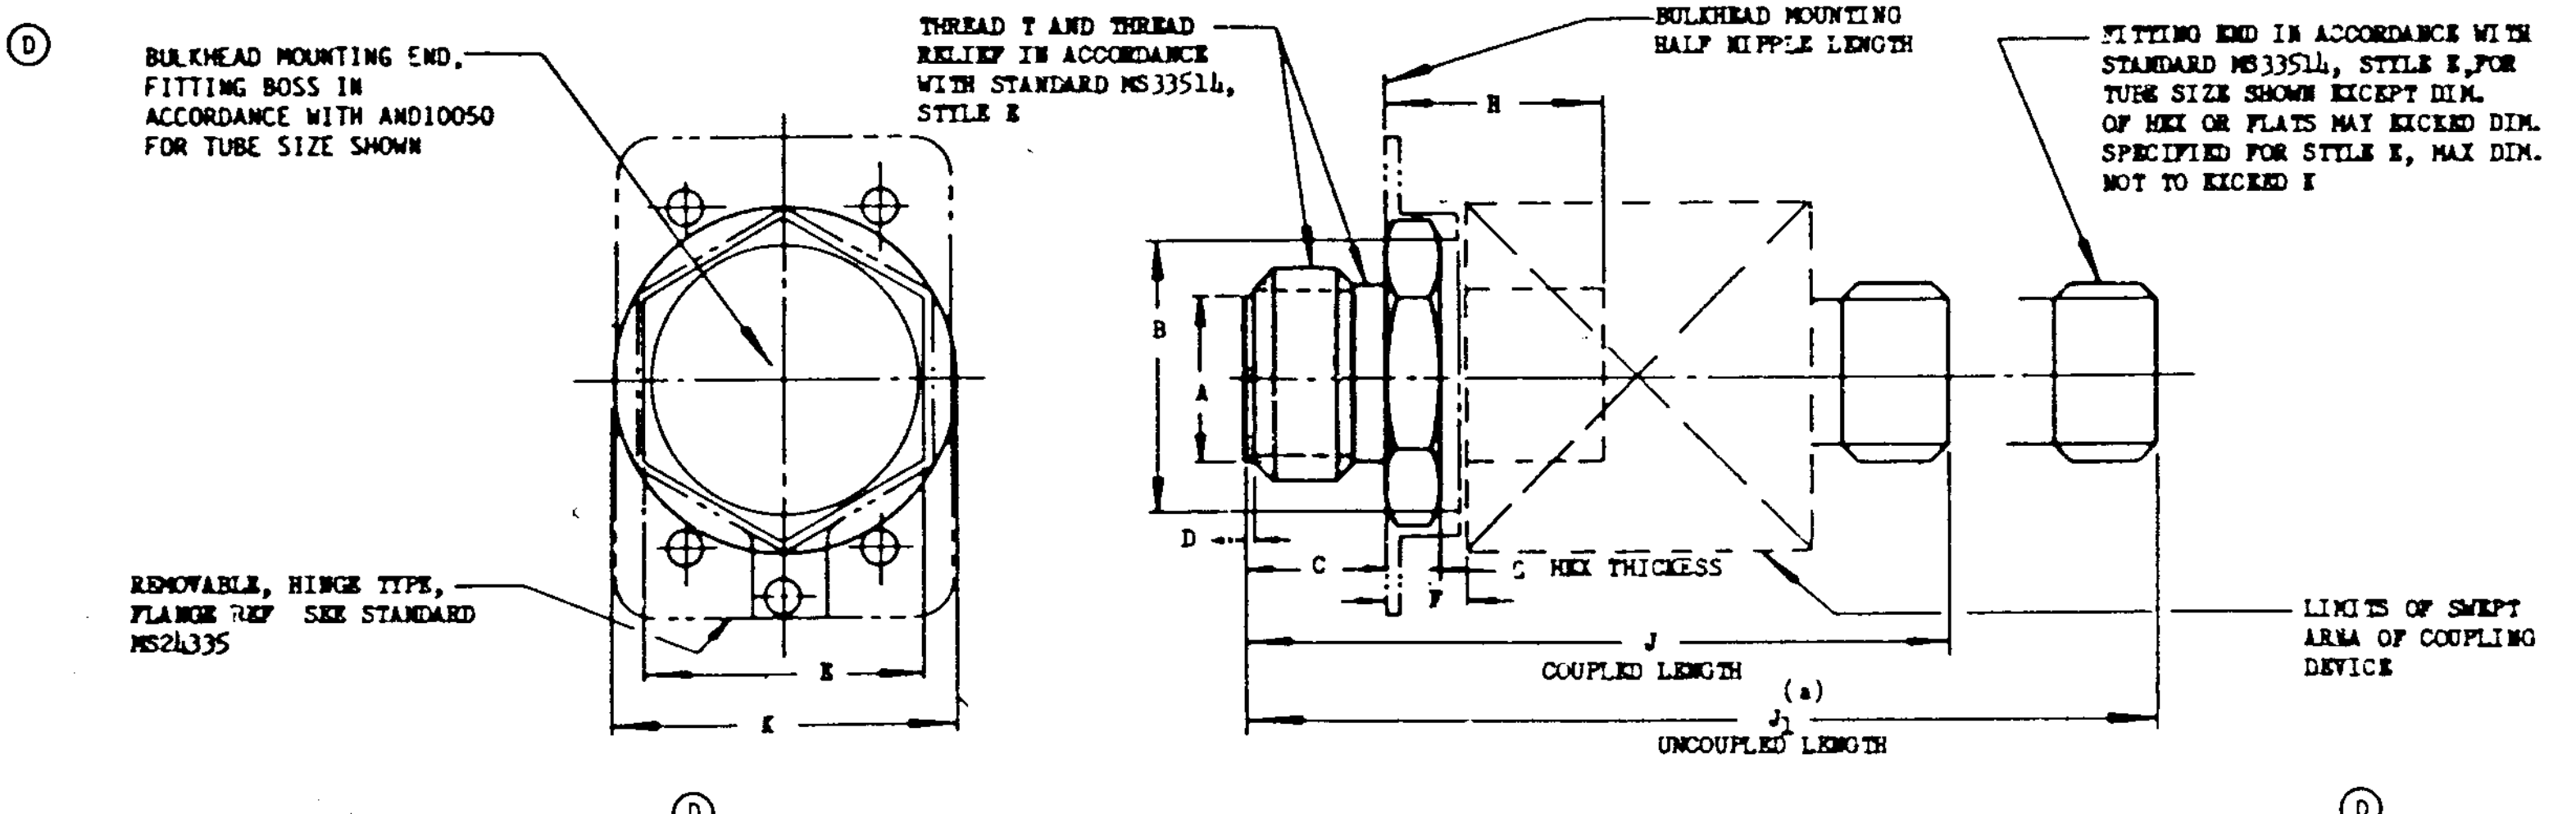
Ⓓ
BULKHEAD MOUNTING END, FITTING BOSS IN ACCORDANCE WITH AND10050 FOR TUBE SIZE SHOWN
THREAD T AND THREAD RELIEF IN ACCORDANCE WITH STANDARD MS33514, STYLE E
BULKHEAD MOUNTING HALF NIPPLE LENGTH
FITTING END IN ACCORDANCE WITH STANDARD MS33514, STYLE E, FOR TUBE SIZE SHOWN EXCEPT DIM. OF HEX OR FLATS MAY EXCEED DIM. SPECIFIED FOR STYLE E, MAX DIM. NOT TO EXCEED K
H
B
A
D
C
F
G HEX THICKNESS
REMOVABLE, HINGE TYPE, FLANGE REF SEE STANDARD MS24335
E
K
J
COUPLED LENGTH
(a)
J_1
UNCOUPLED LENGTH
LIMITS OF SWEPT AREA OF COUPLING DEVICE
Ⓓ

Ⓓ

DASH NO.	TUBE OD INCH	THREAD T SPECIFICATION MIL-S-8879	A ±.015 DIA	B MAX DIA	C ±.010	D ±.010	E		F MIN	G +.016 -.000	H MAX	J +.032 -.062	J_1 MAX	K MAX DIA
-4	1/4	.8750-14 UNJF-3A	.750	1.000	.594	.030	1.125	+.003 -.004	.375	.250	1.384	3.078	3.672	1.625
-6	3/8	1.0625-12 UNJ-3A	.875	1.250			1.375				1.910	3.469	4.125	1.812
-8	1/2	1.3125-12 UNJ-3A	1.063	1.500			1.625	±.016			1.848	3.893	4.562	1.937
-10	5/8		1.125	1.594							1.938	4.543	5.418	2.125
-12	3/4	1.6250-12 UNJ-3A	1.438	1.750	.906	.062	1.875		.438	.312	2.200	4.812	5.656	2.375
-16	1	1.8750-12 UNJ-3A	1.687	2.000	.938	.093	2.125	±.020			2.503	5.730	6.750	2.625
-20	1-1/4	2.5000-12 UNJ-3A	2.000	2.375	.984	.125	2.750		.500		2.900	6.630	7.800	2.875

Ⓓ

(a) INDICATES COMPLETE SEPARATION OF COUPLING HALVES, ALLOWING LATERAL DISPLACEMENT WITHOUT INTERFERENCE BETWEEN COUPLING HALVES.

MATERIAL: SEE PROCUREMENT SPECIFICATION
FINISH: SEE PROCUREMENT SPECIFICATIONS
PRESSURE RATING: SEE PROCUREMENT SPECIFICATION

NOTES:

1. DIMENSIONS ARE IN INCHES.
2. EXAMPLE OF PART NO.: MS24334 - X - 4
   - 4 — DASH SIZE
   - X — MANUFACTURER'S IDENTIFICATION LETTER ASSIGNED BY QUALIFYING ACTIVITY.
   - MS24334 — BASIC MILITARY STANDARD NO.
3. THE ASSEMBLY DOES NOT INCLUDE FLANGE STANDARD MS24335.
4. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

Ⓓ DENOTE CHANGES

FED. SUP CLASS.
4730

APPROVED 12 Aug 57 REVISED Ⓐ 7 Nov 57 Ⓑ 9 Nov 61 Ⓒ 10 May 68 Ⓓ 30 OCT 87

P.A. Navy - AS
Other Cust
USAF - 99
ARMY - AV Ⓓ

PROCUREMENT SPECIFICATION
MIL-C-25427

TITLE
COUPLING ASSEMBLY, HYDRAULIC, SELF-SEALING,
FLARELESS FITTING TO INTERNAL THREAD BOSS

SUPERSEDES:
MS24334 (ASG)

MILITARY STANDARD

MS24334

SHEET 1 OF 1

DD FORM 672-1

(Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE

PROJECT NO. 4730-[redacted]

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:52Z
Check the source to verify that this is the current version before use.