INCH-POUND


MS24591D
14 May 2007
SUPERSEDING
MS24591C
22 September 2000

DETAIL SPECIFICATION SHEET

SOCKET, ADAPTER, HOSE TO TUBE, REUSABLE, HYDRAULIC, FUEL AND OIL LINES, 1 THROUGH 2 INCHES TUBING SIZES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-5070.

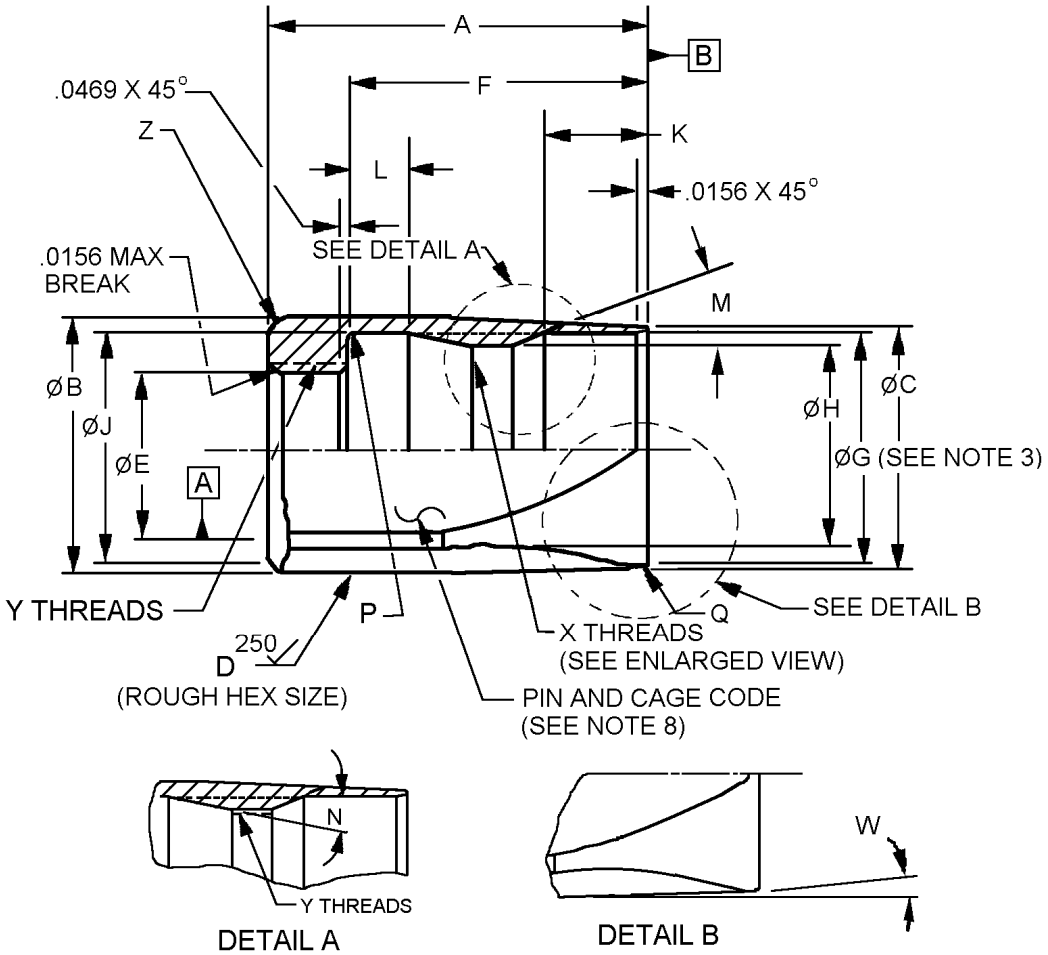


Inches	mm
.0156	0.396
.0469	1.191

FIGURE 1. Socket dimensions and configuration.

AMSC N/A

FSC 4730

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:57Z
Check the source to verify that this is the current version before use.

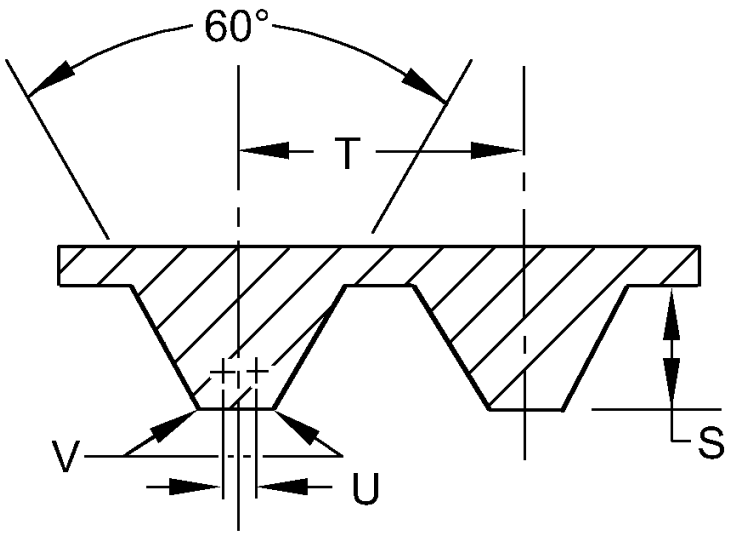

ENLARGED VIEW OF THREAD X

DETAIL C

Dash number	A inches (mm)	B inches (mm)	C inches (mm)	D inches (mm)	E inches (mm)	F inches (mm)	G inches (mm)	H inches (mm)	J inches (mm)
-16	1.671 (42.44) 1.651 (41.94)	1.546 (39.27) 1.516 (38.51)	1.421 (36.09) 1.391 (35.33)	1.453 (36.91) 1.423 (36.14)	1.015 (25.78) 1.002 (25.45)	1.280 (32.51) 1.260 (32.00)	1.290 (32.77)	1.175 (29.85)	1.340 (34.04) 1.330 (33.78)
-20	1.760 (44.70) 1.740 (44.20)	1.921 (48.79) 1.891 (48.03)	1.765 (44.83) 1.735 (44.07)	1.765 (44.83) 1.735 (44.07)	1.265 (32.13) 1.252 (31.80)	1.373 (34.87) 1.353 (34.37)	1.555 (39.50)	1.430 (36.32)	1.560 (39.62) 1.550 (39.37)
-24	1.860 (47.24) 1.830 (46.48)	2.124 (53.95) 2.094 (53.19)	1.937 (49.20) 1.907 (48.44)	1.953 (49.61) 1.923 (48.84)	1.515 (38.48) 1.502 (38.15)	1.465 (37.21) 1.445 (36.70)	1.800 (45.72)	1.675 (42.55)	1.810 (45.97) 1.795 (45.59)
-32	2.270 (57.66) 2.230 (56.64)	2.640 (67.06) 2.600 (66.04)	2.460 (62.48) 2.420 (61.47)	2.460 (62.48) 2.420 (61.47)	1.948 (49.48) 1.940 (49.28)	1.860 (47.24) 1.820 (46.23)	2.290 (58.17)	2.160 (54.86)	2.330 (59.18) 2.315 (58.80)

FIGURE 1. Socket dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:57Z
Check the source to verify that this is the current version before use.

Dash number	K inches (mm)	L inches (mm)	M	N	P inches (mm)	Q inches (mm)	S inches (mm)	T inches (mm)	U inches (mm)
-16	.300 (7.62)	.280 (7.11) .270 (6.86)	20º	15º	.062 (1.57) .032 (.81)	.046 (1.17) .016 (.41)	.0575 (1.46)	.166 (4.22)	.000 (.00)
-20	.350 (8.89)	.255 (6.48) .245 (6.22)				.077 (1.96) .047 (1.19)	.0625 (1.59)		
-24	.000	.455 (11.56) .445 (11.30)	8º	25º					
-32	.250 (6.35)	.520 (13.21) .480 (12.19)	12.5º	15º	.070 (1.78) .030 (.76)	.050 (1.27) .010 (.25)	.0620 (1.57)	.200 (5.08)	.022 (.56) .012 (.30)

Dash number	V inches (mm)	W	X LH-Round thread (see note 7)	Y (see note 7)	PD	Z inches(mm)
-16	.031 (0.79)	3.5º	1.290-6	1.0625-18 UNEF-2B	---	.109 (2.77) .079 (2.01)
-20		4º	1.555-6	1.3125-18 UNEF-2B	---	.140 (3.56) .110 (2.79)
-24		4.5º	1.800-6	1.5625-18 UNEF-2B	---	.156 (3.96)
-32	.018 (0.46)		2.285-5	2.0000-18 UNS-2B	1.9706 1.9639	.180 (4.57) .140 (3.56)

NOTES:
1. Dimensions are in inches
2. Metric equivalents are for information only.
3. Thread marks on diameter G shall not be cause for rejection.
4. Unless otherwise specified, tolerances are as follows: angles ±1°, decimals ±.005 inch (0.13 mm).
5. Break all sharp edges and remove all burrs and slivers.
6. Unless otherwise specified, maximum surface roughness shall be 125 μin R_a in accordance with ASME B46.1.
7. Except round threads, threads shall be in accordance with MIL-S-7742.
8. Part or Identifying Number (PIN).

FIGURE 1. Socket dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:57Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: The design, construction, and physical dimensions shall be in accordance with MIL-DTL-5070 and figure 1 in case of conflict between this drawing and MIL-DTL-5070, this drawing shall govern.

Intended use. This part is a component of MS24587, MS27224, MS27226, MS27228, MS27230, and MS27232.

Material: Aluminum in accordance with MIL-DTL-5070.

Finish: Finish shall be in accordance with MIL-DTL-5070.

Color identification: Color identification shall be in accordance with MIL-DTL-5070.

PIN example:

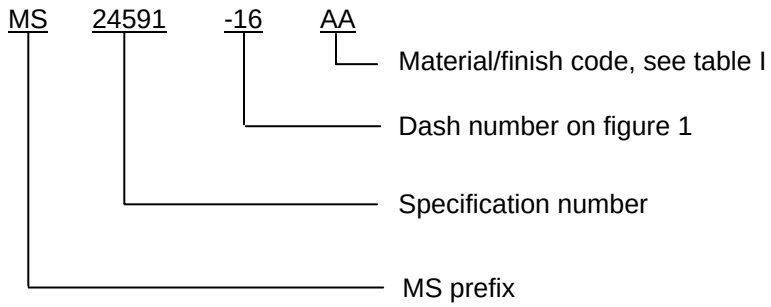


TABLE I. Code for material and finish.

Code	Dash size	Material/finish
AA	-16 through -32	Aluminum – anodic coating

Marking: The PIN and the manufacturer's Commercial and Government Entity (CAGE) Code or trademark shall be marked on the socket or a removable tag securely attached to the socket.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue, due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-5070, this document references the following:

MIL-S-7742
MS24587
MS27224
MS27226
MS27228
MS27230
MS27232
ASME B46.1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:57Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - AT
Navy - AS
Air Force - 99
DLA - CC

Preparing activity:
DLA - CC

(Project 4730-2005-041)

Review activities:
Army - AV
Navy - MC, SA
Air Force - 11, 71

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:57Z
Check the source to verify that this is the current version before use.