DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

REVIEWER SYMBOLS: ARMY - ME, NAVY -, USAF -

USER SYMBOLS:

FED. SUP CLASS
6240

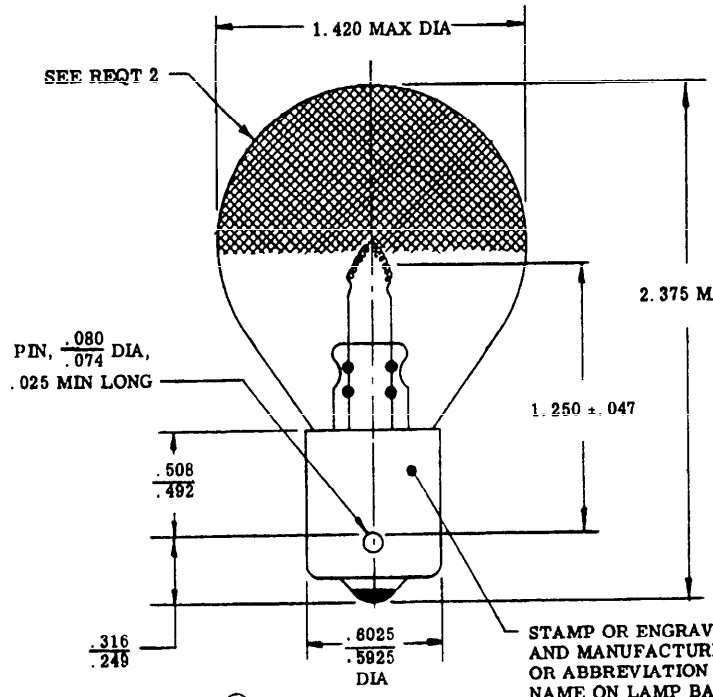


| inch | mm |
|---|---|
| .025 | 0.64 |
| .074 | 1.88 |
| .080 | 2.03 |
| .249 | 6.32 |
| .316 | 8.03 |
| .492 | 12.50 |
| .508 | 12.90 |
| .5925 | 15.05 |
| .6025 | 15.30 |
| 1.250 | 31.75 |
| 1.420 | 36.07 |
| 1.500 | 38.10 |
| 2.375 | 60.33 |

(D)

| DASH NO. | TRADE NO | TYPE PER MIL-L-6363 | RATED VOLTS | RATED CANDLE-POWER | MAX AMPERES | FILAMENT TYPE | FINISH | AVERAGE LIFE (HOURS) |
|---|---|---|---|---|---|---|---|---|
| 311 | 311 | I | 28 | 50 (SEE NOTE 3) | 1.5 | C-2V | CLEAR - NO COATING | 300 |
| SB311 | 311SB | I | | | | | REFLECTIVE COATING (REQT. 2) | |
| R311 | 311R | I | | | | | RED COATING (REQT. 1) | |
| 3011 | 3011 | I | | 44 | | | CLEAR - NO COATING | 1000 |

(D)

REQUIREMENTS:

1. LIGHT EMITTED BY RED LAMPS SHALL CONFORM TO MIL-C-25050 FOR INSTRUMENT AND PANEL LIGHTING RED. RED COATINGS, WHEN USED; SHALL BE TRANSLUCENT.
2. FINISH CLEAR, EXCEPT TOP TO RECEIVE AN ALUMINIZED REFLECTIVE COATING. DISTANCE FROM EDGE OF COATING TO TOPS OF BAYONET PINS SHALL BE APPROXIMATELY EQUAL TO LIGHT CENTER LENGTH, 1.250.

NOTES:

1. DIMENSIONS ARE IN INCHES.
2. METRIC EQUIVALENTS (TO THE NEAREST .01 mm) ARE GIVEN FOR GENERAL INFORMATION ONLY AND ARE BASED UPON 1 INCH = 25.4 mm.
3. RATED CANDLEPOWER APPLIES TO LAMP BEFORE RED COATING OR REFLECTIVE COATING IS APPLIED.
4. PART NUMBERS MS25235-311, SB311, and R311 REPLACE AND ARE INTERCHANGEABLE WITH AN3133-311, -SB311, and -R311 RESPECTIVELY.
5. CERTAIN PROVISIONS OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT ASCC 12/2 AND STANAG 3544. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED WHICH WILL AFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES IF REQUIRED.
6. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

APPROVED 5 APR 57 — REVISED (A) 7 JUL 72 (B) 12 OCT 73 (C) 12 OCT 83 (D) 23 AUG 1985

| P.A. | | TITLE | MILITARY STANDARD |
|---|---|---|---|
| NAVY - AS<br>Other Cust<br>USAF - 99<br>ARMY - AV | INTER-NATIONAL INTEREST (SEE NOTE 5) | LAMP, INCANDESCENT, SINGLE-CONTACT BAYONET CANDELABRA BASE, S-11 BULB | MS25235 |
| PROCUREMENT SPECIFICATION: MIL-L-6363 | | SUPERSEDES: AN3133, MS0025235 (USAF) | SHEET 1 OF 1 |

DD FORM (MAY 72) 672-1 (Coordinated) — PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. (PROJECT NO. 6240-0367) PLATE NO. 16320

ENGINEERING SPECIFICATIONS AND STANDARDS DEPARTMENT NAVAL AIR ENGINEERING CENTER

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:06Z
Check the source to verify that this is the current version before use.