
FED. SUP CLASS
4730

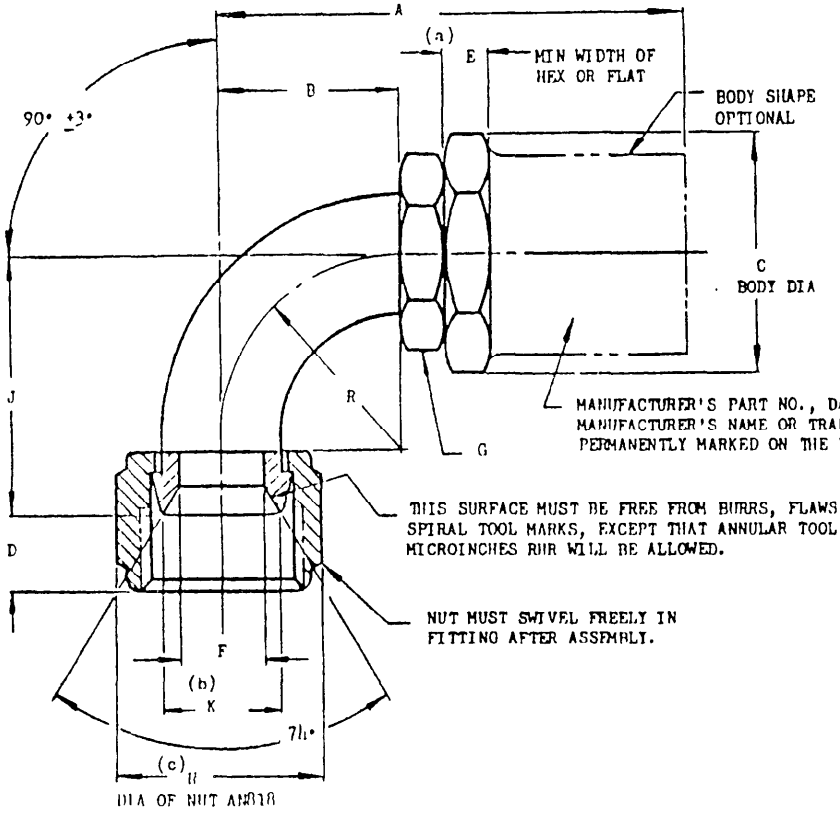

DASH NO.	HOSE ID REF	TUBING OD	(c) NUT	A MAX	B MAX	C MAX	D		(a) E MIN	F MIN	G MIN NIPPLE HEX ACROSS FLATS	H REF	J MAX	K DIA		R ±.031	WT MAX LB
-4	7/32	1/4	AN818-4	2.750	.410	.875	.375	±.016	.188	.146	.563	.649	.754	.295	±.010	.375	.13
-5	9/32	5/16	AN818-5		.473	.937				.177	.625	.721	.879	.355		.437	.15
-6	11/32	3/8	AN818-6	2.875	.535	1.160			.250	.271	.688	.794	.958	.435		.500	.17
-8	7/16	1/2	AN818-8	3.000		1.375	.438			.365	.875	1.010	.972	.570			.26
-10	9/16	5/8	AN818-10	3.187	.675	1.550	.515	±.031	.312	.455	1.000	1.155	1.160	.680		.625	.40
-12	11/16	3/4	AN818-12	4.000	1.205	1.740	.562		.375	.568	1.250	1.443	1.816	.850		1.250	.54
-16	7/8	1	AN818-16	4.750	1.562	2.000	.620			.778	1.500	1.732	2.066	1.103	±.015	1.500	.83

(a) HEX OR FLATS SHALL FIT STANDARD WRENCH OPENINGS.

(b) DIMENSION "K" OF CONICAL SEAT TO BE CONCENTRIC WITH OD OF NIPPLE WITHIN .005 TIR THROUGH SIZE -6; .010 TIR SIZE -8 AND ABOVE.

(c) A NON-STANDARD SWIVEL NUT MAY BE USED, PROVIDED THE HEX AND THREAD DIMENSIONS ARE IN ACCORDANCE WITH AN818 AND PROVIDED THE NUT CANNOT BE REMOVED FROM ASSEMBLY.

(C) MATERIAL: NIPPLES, NUTS AND ELBOW, STEEL; BODY, ALUMINUM, MIL-F-8789. AS AN ALTERNATE, THE ELBOW MAY BE FABRICATED FROM TUBING. TUBING SHALL BE STEEL AS SPECIFIED IN AMS5050 OR AMS5053 AND JOINTS SHALL BE WELDED, PER MIL-STD-1595 OR COPPER HYDROGEN BRAZED, IN ACCORDANCE WITH MIL-B-7883, EXCEPT AS MODIFIED BY THE PROCUREMENT SPECIFICATION.
FINISH: ALUMINUM ALLOY, ANODIC TREATMENT, MIL-A-8625, TYPE II.
STEEL, CAIMIUM PLATE, QQ-P-416, TYPE II, CLASS 3; COLOR, BLACK.

MS PART NO. SHALL BE MARKED ON A REMOVABLE TAG SECURELY ATTACHED TO END FITTING ASSEMBLY.

A TRUE CIRCULAR CROSS SECTION IS NOT REQUIRED WITHIN ANGLE OF BEND, HOWEVER, A BALL .031 SMALLER THAN "F" DIA MUST PASS THROUGH THE ENTIRE FITTING.

THESE FITTINGS FOR USE WITH HOSE, MIL-H-8788.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.005, ANGLES ±1°.

CLEARANCE SHALL BE ALLOWED FOR MAX DIMENSIONS SHOWN ON THIS STANDARD FOR INSTALLATION.
BREAK ALL SHARP EDGES AND REMOVE ALL BURRS AND SLIVERS.
THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

· U.S. GOVERNMENT PRINTING OFFICE: 1983—605-034-546

APPROVED 17 Dec 58 REVISED (A) 25 Feb 60 (B) 20 May 69 (C) 23DEC82

Review activities:
DLA - CS

is approved for use by all Departments and
nt of Defense. Selection for all new
pplications and for repetitive use shall
ngineering and
e made from this document when applicable.

P.A.USAF - 82 (C)
Other Cust
Navy - AS
AF - 99

TITLE
ELBOW, 90° FLARED TUBE TO HOSE, ATTACHABLE, HYDRAULIC (3,000 PSI)

MILITARY STANDARD
MS28781

PROCUREMENT SPECIFICATION SUPERSEDES

SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 20260-23117:002
Check the source to verify that this is the current version before use.