FED. SUP CLASS 5305

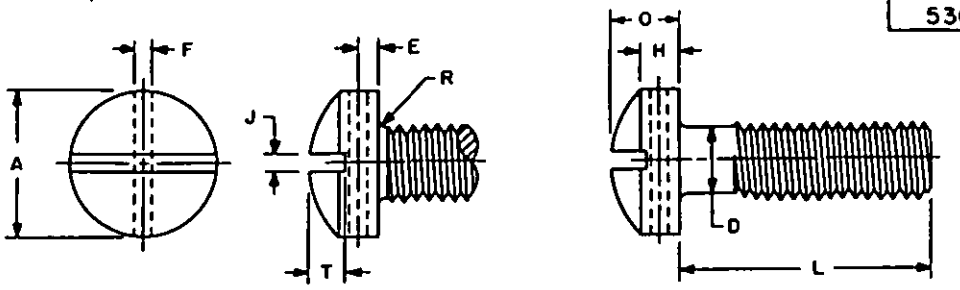


TABLE I

	NOMINAL SIZE		.086	.112	.138	.164	.190	.250	.3125	.375
	THREADS PER INCH, UNC-2A		56	40	32	32	24	20	18	16
D	BODY DIAMETER	MAX	.0860	.1120	.1380	.1640	.1900	.2500	.3125	.3750
		MIN	.0717	.0925	.1141	.1399	.1586	.2127	.2712	.3287
A	HEAD DIAMETER	MAX	.140	.183	.226	.270	.313	.414	.518	.622
		MIN	.124	.166	.208	.250	.292	.389	.490	.590
H	HEAD SIDE HEIGHT	MAX	.062	.079	.096	.113	.130	.170	.211	.253
		MIN	.055	.072	.089	.106	.123	.161	.201	.242
O	TOTAL HEAD HEIGHT	MAX	.083	.107	.132	.156	.180	.237	.295	.355
		MIN	.070	.094	.118	.141	.165	.219	.276	.333
J	SLOT WIDTH	MAX	.031	.039	.048	.054	.060	.075	.084	.094
		MIN	.023	.031	.039	.045	.050	.064	.072	.081
T	SLOT DEPTH	MAX	.030	.038	.045	.065	.075	.102	.130	.154
		MIN	.022	.030	.035	.054	.064	.087	.110	.134
E	DRILL LOCATION	NOM	.026	.035	.043	.043	.043	.062	.078	.094
F	DRILLED HOLE DIA	NOM	.031	.037	.046	.046	.046	.062	.070	.070
R	RADIUS (8)	MAX	.013	.017	.021	.025	.028	.038	.047	.056
	TENSILE STRENGTH, LBS-MIN (8)		225	370	560	860	1,080	1,970	3,250	4,800

L LENGTH	TOLERANCE	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.*	DASH NO.*	DASH NO.*	DASH NO.*
.12		1	11	24	39				
.19		2	12	25	40	58			
.25		3	13	26	41	59			
.31		4	14	27	42	60	76		
.38	+.00 -.03	5	15	28	43	61	77	92	
.44		6	16	29	44	62	78	93	
.50		7	17	30	45	63	79	94	107
.62		8	18	31	46	64	80	95	108
.75		9	19	32	47	65	81	96	109
.88		10	20	33	48	66	82	97	110
1.00			21	34	49	67	83	98	111
1.25			22	35	50	68	84	99	112
1.50	+.00 -.06		23	36	51	69	85	100	113
1.75				37	52	70	86	101	114
2.00				38	53	71	87	102	115
2.25					54	72	88	103	116
2.50	+.00 -.09				55	73	89	104	117
2.75					56	74	90	105	118
3.00					57	75	91	106	119

(8) * Dash numbers 58 thru 119 are INACTIVE FOR NEW DESIGN AFTER 6 March 1974.

(8) FOR CHANGES SEE SHEETS 1 AND 2.

REVIEWER: AV, IS, AS, AT, MC, NE, OS, SH, WV, YD
USER:

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 9 FEB 1954 REVISED (A) 18 JUN 1962 (B) 6 MAR 1974

P.A. WC Other Cust 82	TITLE SCREW, MACHINE-DRILLED FILLISTER HEAD, SLOTTED, ALUMINUM ALLOY, UNC-2A	MILITARY STANDARD MS 35277
PROCUREMENT SPECIFICATION FF-S-92	SUPERSEDES: MS35361 in part; MS35366 in part	SHEET 1 OF 2

DD FORM 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:13Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5305

NOTES:

(B) 1. MATERIAL: Aluminum alloy, 2024, in accordance with QQ-A-200/3 or QQ-A-225/6. The minimum ultimate tensile strength shall be 62,000 PSI.
2. PROTECTIVE COATING: Anodized in accordance with MIL-A-8625, Type I or II, Class 1.
3. THREADS: The threads shall be in accordance with Screw-Thread Standards for Federal Services, Handbook H28.
4. DIMENSIONS: All dimensions in Table I are in inches. All dimensions in Table II are in millimetres.
5. PART NUMBER: The MS part number consists of the MS number, plus the dash number. Example: MS35277-1.
(B) 6. THREAD LENGTH: Full form threads shall extend to within 2 threads or less of head bearing surface for lengths thru 2.00 inches/50.80 millimetres. Longer lengths shall have a minimum full form thread length of 1.50 inches/38.10 millimetres.
7. The drilled hole shall be approximately at a right angle to the slot and may be permitted to break through the bottom of the slot. All burrs and sharp edges shall be removed.
8. Referenced documents shall be of the issue in effect on date of invitations for bid.
9. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

REVIEWER: AV, IS
USER: AS, AT, MC, ME, OS, SH, WY, YD

(B) TABLE II
METRIC TRANSLATION OF TABLE I

NOMINAL SIZE		2.18	2.84	3.51	4.17	4.83	6.35	7.94	9.52
THREAD PITCH		.45	.64	.79	.79	1.06	1.27	1.41	1.59
D BODY DIAMETER	MAX	2.18	2.84	3.51	4.17	4.83	6.35	7.94	9.52
	MIN	1.82	2.35	2.90	3.55	4.03	5.40	6.89	8.35
A HEAD DIAMETER	MAX	3.56	4.65	5.74	6.86	7.95	10.52	13.16	15.80
	MIN	3.15	4.22	5.28	6.35	7.42	9.88	12.45	14.99
H HEAD SIDE HEIGHT	MAX	1.57	2.01	2.44	2.87	3.30	4.32	5.36	6.43
	MIN	1.40	1.83	2.26	2.69	3.12	4.09	5.11	6.15
O TOTAL HEAD HEIGHT	MAX	2.11	2.72	3.35	3.96	4.57	6.02	7.49	9.02
	MIN	1.78	2.39	3.00	3.58	4.19	5.56	7.01	8.46
J SLOT WIDTH	MAX	.79	.99	1.22	1.37	1.52	1.90	2.13	2.39
	MIN	.58	.79	.99	1.14	1.27	1.63	1.83	2.06
T SLOT DEPTH	MAX	.76	.97	1.14	1.65	1.90	2.59	3.30	3.91
	MIN	.56	.76	.89	1.37	1.63	2.21	2.79	3.40
E DRILL LOCATION	NOM	.66	.89	1.09	1.09	1.09	1.57	1.98	2.39
F DRILLED HOLE DIA	NOM	.79	.94	1.17	1.17	1.17	1.57	1.78	1.78
R RADIUS	MAX	.33	.43	.53	.64	.71	.97	1.19	1.42

L LENGTH	TOLERANCE	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.*	DASH NO.*	DASH NO.*	DASH NO.*
3.05	+.00 -.76	1	11	24	39				
4.83		2	12	25	40	58			
6.35		3	13	26	41	59			
7.87		4	14	27	42	60	76		
9.65		5	15	28	43	61	77	92	
11.18		6	16	29	44	62	78	93	
12.70		7	17	30	45	63	79	94	107
15.75		8	18	31	46	64	80	95	108
19.05		9	19	32	47	65	81	96	109
22.35		10	20	33	48	66	82	97	110
25.40			21	34	49	67	83	98	111
31.75	+.00 -1.52		22	35	50	68	84	99	112
38.10			23	36	51	69	85	100	113
44.45				37	52	70	86	101	114
50.80				38	53	71	87	102	115
57.15	+.00 -2.29				54	72	88	103	116
63.50					55	73	89	104	117
69.85					56	74	90	105	118
76.20					57	75	91	106	119

* Dash numbers 58 thru 119 are INACTIVE FOR NEW DESIGN AFTER 6 March 1974.

APPROVED 9 FEB 1954 REVISED (A) 10 JUN 1982 (B) FOR CHANGES SEE SHEETS 1 AND 2.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. MC	TITLE	MILITARY STANDARD
Other Cust 82	SCREW, MACHINE-DRILLED FILLISTER HEAD, SLOTTED, ALUMINUM ALLOY, UNC-2A	MS 35277
PROCUREMENT SPECIFICATION FF-S-92	SUPERSEDES: MS35361 in part; MS35366 in part	SHEET 2 OF 2

DD FORM 672-1 (Coordinated)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:13Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. *Attach any pertinent* data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE: MS35277 Rev B, Screw, Machine-Drilled Fillister Head, Slotted, Aluminum Alloy, UNC-2A

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:13Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
Rock Island Arsenal
ATTN: SARRI-LE-SC
Rock Island, Illinois 61201

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:13Z
Check the source to verify that this is the current version before use.