
FED. SUP CLASS
4730

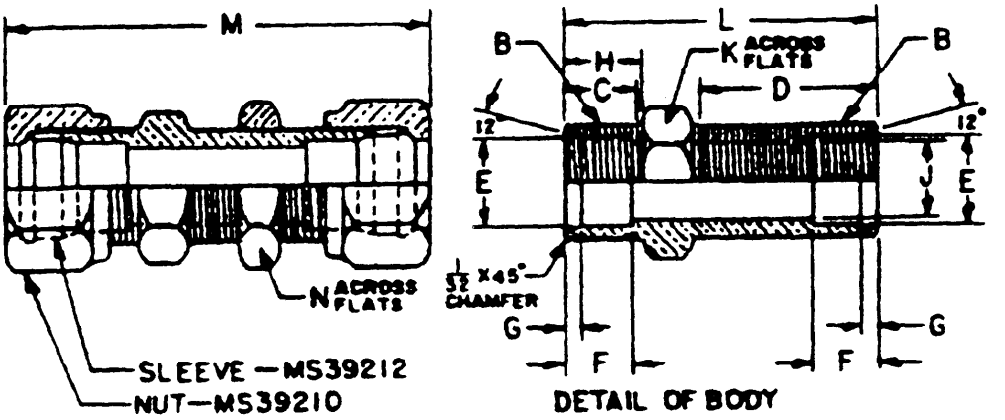

DASH NO.	TUBE O.D.	B	C THREAD LENGTH	D THREAD LENGTH	E	F	G	H	J	K	L	M	N
1	1/8	5/16-24UNF-2A	7/32	11/16	.135 .139	13/64	1/8	9/32	3/32	1/2	1-1/4	1-7/8	1/2
2	5/16	3/8-24UNF-2A	7/32	3/4	.196 .200	1/4	5/32	9/32	1/8	9/16	1-5/16	2	9/16
3	1/4	1/2-20UNF-2A	21/64	29/32	.261 .265	19/64	13/64	13/32	13/64	11/16	1-21/32	2-15/32	11/16
4	5/16	9/16-18UNF-2A	21/64	51/64	.324 .328	19/64	13/64	13/32	13/64	3/4	1-17/32	2- 9/32	13/16
5	3/8	5/8-18UNF-2A	23/64	1-23/64	.386 .390	19/64	13/64	7/16	9/32	13/16	2-1/8	3	13/16
6	1/2	3/4-16UNF-2A	11/32	1-11/32	.514 .518	5/16	13/64	7/16	27/64	15/16	2-1/8	3-3/16	15/16
7	5/8	15/16-16UN-2A	23/64	1-3/8	.641 .645	11/32	15/64	15/32	1/2	1-3/8	2-3/16	3-1/4	1-1/8
8	3/4	1-1/16-16UN-2A	23/64	1-13/32	.766 .770	11/32	15/64	15/32	21/32	1-1/4	2-1/4	3-7/16	1-1/4
9	7/8	1-3/16-16UN-2A	23/64	1-23/32	.891 .895	11/32	13/64	15/32	23/32	1-3/8	2-1/4	3-7/16	1-3/8
10	1	1-5/16-16UN-2A	25/64	1-7/16	1.016 1.020	13/32	13/64	15/32	7/8	1-1/2	2-5/16	3-1/2	1-1/2
11	1-1/4	1-5/8-16UN-2A	7/16	1-35/64	1.270 1.274	13/32	13/64	35/64	1-5/64	1-13/16	2-9/16	3-13/16	1-13/16
12	1-1/2	1-7/8-16UN-2A	15/32	1-23/32	1.520 1.524	31/64	13/64	34/64	1-11/32	2-1/16	2-7/8	4-1/4	2-1/16

MATERIAL: STEEL, IN ACCORDANCE WITH FEDERAL STANDARD NO. 66, AISI-C-1112, C-1113, C-1117, C-1118 OR C-1137.

FINISH: CADMIUM PLATED, SPECIFICATION QQ-P-416, TYPE II, CLASS 3.

TOLERANCES: UNLESS OTHERWISE SPECIFIED, DECIMALS ± .005, FRACTIONS ± 1/64, DEGREES ± 2°.

THREADS: THE THREADS SHALL BE IN ACCORDANCE WITH MIL-STD-H28/2.

DIMENSIONS: UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.

PART NUMBER: THE PART NUMBER CONSISTS OF MS NUMBER PLUS THE DASH NUMBER. EXAMPLE: MS39199-1. THE PART NUMBER COVERS THE COMPLETE ITEM (WITH NUTS AND SLEEVES).

NOTES: 1. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

2. THIS ILLUSTRATION IS FOR IDENTIFICATION AND IS NOT INTENDED TO RESTRICT DESIGNS OR SHAPES NOT DIMENSIONED.

Ⓔ **INACTIVE** FOR NEW DESIGN. USE FOR MAINTENANCE PURPOSES ONLY. FOR NEW DESIGN USE MS51812.

APPROVED 24 APR 62 REVISED (A) 29 DEC 67 (B) 10 OCT 74 (C) 3 FEB 75 (D) 13 MAY 77 (E) 26 FEB 82

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

P.A. ARMY-AT Other Cmds	TITLE NIPPLES, TUBE - SAFETY SLEEVE COMPRESSION TYPE, BULKHEAD MOUNTING	MILITARY STANDARD MS39199 (AT)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES	SHEET 1 OF 1

DD FORM 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 4730-A212

Source: https://assist.dla.mil -- Downloaded: 202610-23T17:48Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:48Z
Check the source to verify that this is the current version before use.

NOTICE
OF VALIDATION

MS391991E(AT)
NOTICE 1
14 September 1987

MILITARY SPECIFICATIONS

NIPPLES , TUBE-SAFETY SLEEVE
__ COMPRESSION TYPE, BULKHEAD MOUNTING

MS39199E(AT), dated 26 February 1982, has been reviewed and determined to be valid for maintenance purposes only.

Custodian:
Army-AT

Preparing activity:
Army-AT

AMSC N/A

FSC 4730

DISTRIBUTION STATEMENT A. Approved for public release; distribution Is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:48Z
Check the source to verify that this is the current version before use.

REINFORCEMENT PIECES

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:48Z
Check the source to verify that this is the current version before use.