

FED. SUP CLASS
2330

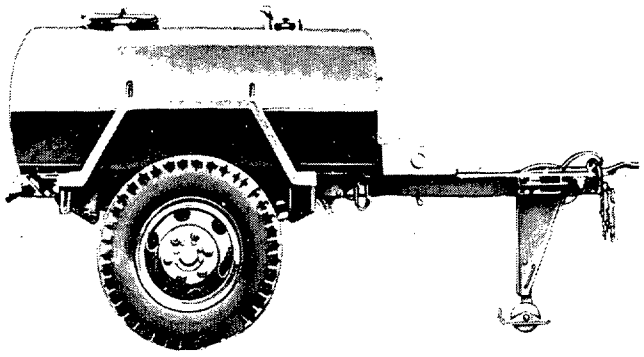


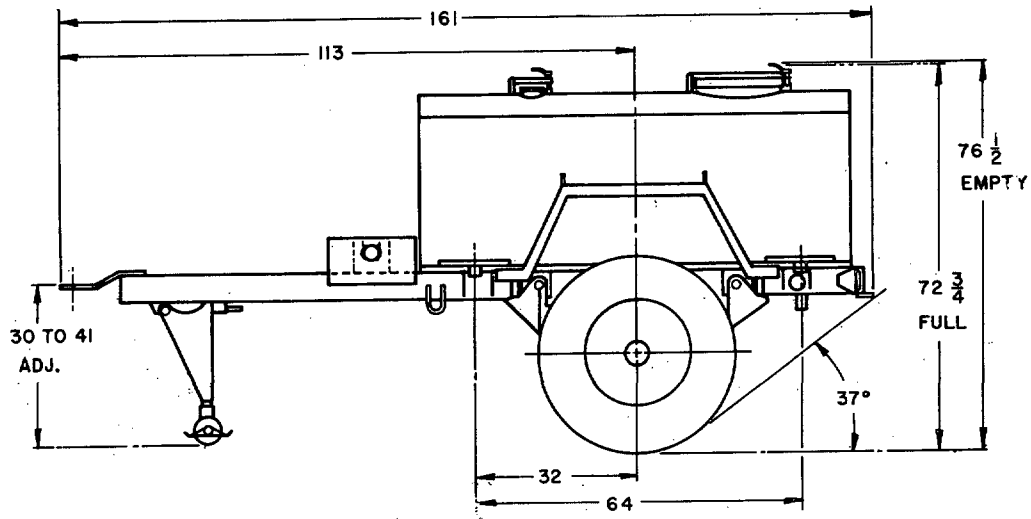


Ⓐ

CANCELLED AFTER 24 APRIL 1974

SUPERSEDED BY MS52108

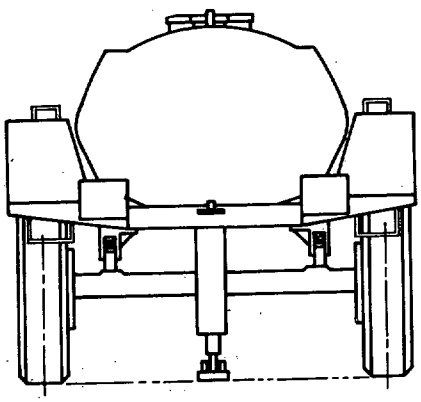

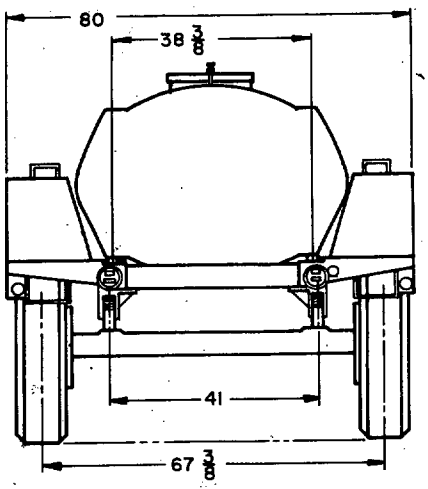

DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.

MS PART NO.	ENGINEERING PARTS LIST
MS500024-1	8750500

P.A. MO (ATAC)
Other Cust
NAVY-MC
AF-84

TITLE

TRAILER, TANK, WATER, 1-1/2 TON, 2 WHEEL, M149

MILITARY STANDARD

MS500024

PROCUREMENT SPECIFICATION: MIL-T-45316

SUPERSEDES:

SHEET 1 OF 2

REVIEW ACTIVITIES: ARMY-MD; NAVY-MS;
USER ACTIVITIES: NAVY-YD, AF-11

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 10 DEC 65 REVISED Ⓐ 24 APRIL 1974

Document Provided by: https://assist.dla.mil -- Downloaded: 2026-10-23T20:45Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2330

VEHICLE CHARACTERISTICS

PRIME MOVER: TRUCK, CARGO, 2-1/2 TON, 6X6

BASIC CHASSIS: M492 PART NO. 8750514

CURB WEIGHT FULLY EQUIPPED: 2500 LBS.

PAYLOAD:

CROSS COUNTRY:	3335
HIGHWAY:	3335 LBS.

GROSS WEIGHT:

CROSS COUNTRY:	5835
HIGHWAY:	5835 LBS.

WEIGHT DISTRIBUTION:

	NO LOAD	CROSS COUNTRY	HIGHWAY
LUNETTE EYE:	240	260	260
AXLE:	2260	5575	5575
LANDING GEAR:	330	380	380
AXLE:	2170 LBS.	5455 LBS.	5455 LBS.

(REFERENCED WEIGHTS ARE FOR INFORMATION ONLY.)

TANK ASSY: PART NO. 7034967

GENERAL:

TRAILER, TANK, WATER, 400 GALLON, 2 WHEEL, M149, TRANSPORTS POTABLE WATER ON HIGHWAY AND CROSS COUNTRY TERRAINS. THE WATER TANK IS MADE OF TWO WALLS OF FIBERGLASS REINFORCED POLYESTER RESIN PLASTIC SEPARATED BY INSULATION THAT HAS A DENSITY OF 7 LBS. PER CUBIC FT. AND BONDED TO BOTH WALLS. IT IS EQUIPPED WITH DISPENSING EQUIPMENT CONSISTING OF FOUR BRONZE FAUCETS AND BRASS PIPING. SHUT-OFF VALVE IS PROVIDED TO PERMIT COMPLETE DRAINAGE FROM THE EXTERIOR PLUMBING.

FORDING DEPTH: 30 INCHES

LUNETTE: COUPLER MS 51339-2

LANDING GEAR: PART NO. 7032127

ELECTRICAL SYSTEM: INST'L. DWG NO. 7055111

POTENTIAL: 24 VOLTS
STOPLIGHT, TAILLIGHT: (2) MS 51329-1
STOPLIGHT, BLACKOUT: (1) MS 51302-1

FRAME: ASSEMBLY PART NO. 10944279

AXLE: ASSEMBLY PART NO. 8719916

SPRINGS: (2) PART NO. 8389626
SIZE: 2-1/2 x 48

SHOCK ABSORBERS: (2) 8716992

WHEELS: (2) MS 53044-5
SIZE: 7.5 x 20

TIRES: 9.00 x 20, 8 PLY, MS 35388-16
TREAD DESIGN: NDCC
TUBE: MS 35392-13

BRAKES: PARKING
INST'L. DWG. NO. 10929853
ACTUATION: AIR/HYDRAULIC

MAXIMUM TOWING SPEED:

CROSS COUNTRY:	30 MPH
HIGHWAY:	50 MPH

TIE DOWNS: NO. (4)
LOCATION: 2 FRONT CORNERS
2 REAR CORNERS

(FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN).

(REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID).

THIS VEHICLE SHALL BE IN ACCORDANCE WITH DRAWINGS IN REFERENCED ENGINEERING PARTS LIST, COPIES OF WHICH MAY BE OBTAINED FROM:

U. S. ARMY TANK-AUTOMOTIVE CENTER
ATTN: STANDARDIZATION BRANCH
WARREN, MICHIGAN 48090.

APPROVED 10 DEC 65 REVISED (A) FOR CHANGES SEE SHEET 1

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. MO (ATAC) Other Cust NAVY-MC AF-84	TITLE TRAILER, TANK, WATER, 1-1/2 TON, 2 WHEEL, M149	MILITARY STANDARD MS500024
PROCUREMENT SPECIFICATION MIL-T-45316	SUPERSEDES:	SHEET 2

DD FORM 1 SEP 67 672-1 (Continued) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:45Z
Check the source to verify that this is the current version before use.