

FED SUP CLASS
5340



TURNBUCKLE ASSEMBLY

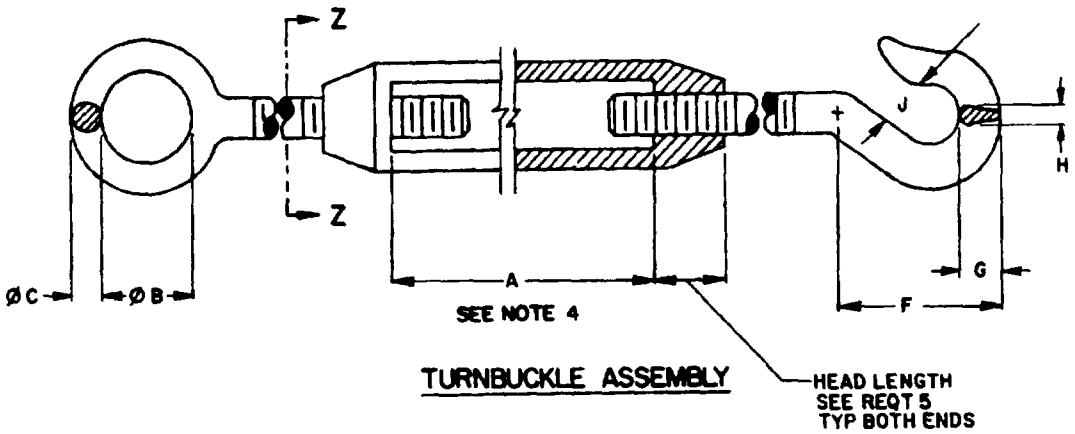

END PULL, OPTIONAL EYE CONFIGURATION

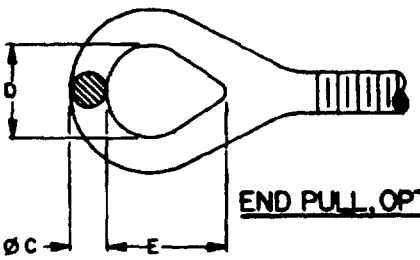

SECTION Z-Z

TABLE I. DASH NUMBERS AND DIMENSIONS

DASH NUMBER	NOMINAL THREAD SIZE	A MIN	EYE				HOOK			
			ØB MIN	ØC MIN	D MIN	E MIN	F MIN	G MIN	H MIN	J MIN
1	.250-20	4	.500	.218	.344	.687	1.000	.343	.187	.437
2	.3125-18	4.5	.625	.281	.437	.812	1.250	.437	.250	.500
3	.375-16	6	.750	.344	.531	.937	1.562	.437	.344	.562
4 5 6	.500-13	6 9 12	1.000	.437	.718	1.187	2.000	.625	.437	.625
7 8 9 10	.625-11	6 9 12 18	1.250	.500	.875	1.375	2.437	.750	.531	.812
11 12 13 14 15	.750-10	6 9 12 18 24	1.500	.625	1.000	1.625	2.937	.937	.625	.968
16 17 18	.875-9	12 18 24	1.750	.750	1.250	1.875	3.437	1.000	.750	1.125
19 20 21 22	1.000-8	12 18 24 36	2.000	.875	1.437	2.250	3.875	1.187	.812	1.250

APPROVED 11 FEB 1983 REVISED

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

USER ACTIVITIES:
ARMY-ME
NAVY-AS, MC, OS, YD

REVIEWER ACTIVITIES:
ARMY-CR
AIR FORCE-82
DLA-IS

P.A. ARMY-AR Other Cust NAVY-SH AIR FORCE-99	INTERNATIONAL INTEREST	TITLE TURNBUCKLE, ROUND BODY, HOOK AND EYE (TYPE I, FORM I, CLASS 6)	MILITARY STANDARD MS51565
PROCUREMENT SPECIFICATION FF-T-791	SUPERSEDES		PAGE 1 OF 3

AMSC N/A

DD FORM 1 MAY 73 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5340-1805

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:07Z
Check the source to verify that this is the current version before use.

FED SUP CLASS 5340

TABLE I DASH NUMBERS AND DIMENSIONS - CONTINUED

DASH NUMBER	NOMINAL THREAD SIZE	A MIN	EYE				HOOK			
			ØB MIN	ØC MIN	D MIN	L MIN	F MIN	G MIN	H MIN	J MIN
23 24 25 26	1 250-7	12 18 24 36	2 125	1 062	1 687	2 562	4 937	1 437	1 000	1 500
27 28 29 30 31	1.500-6	12 18 24 36 48	2.250	1 250	2.125	3 250	5.875	1 750	1.187	1 875
32 33 34 35	1.750-5	18 24 36 48	2 500	1 437	2.375	3.750	6 937	2 125	1 437	2 375
36 37 38	2.000-4.5	24 36 48	3.000	1.625	2.687	4.375	8.000	2 562	1.687	3.000
39 40 41	2.250-4 5	24 36 48	3.250	1 812	2 937	5.187	9.062	3.062	2.000	3 750
42 43 44	2 500-4	24 36 48	3.500	2.000	3 125	6.000	10 125	3.625	2 312	4 625

REQUIREMENTS:

1. MATERIAL: TURNBUCKLE BODY AND END PULLS SHALL BE MANUFACTURED FROM STEEL OF A COMPOSITION CAPABLE OF WITHSTANDING THE SPECIFIED BREAKING STRENGTH IN THE PROCUREMENT SPECIFICATION.

2. FABRICATION METHOD: THE TURNBUCKLE BODY AND END PULLS SHALL BE HOT FORGED

3. FINISH:

   RUST INHIBITOR - TURNBUCKLE BODY AND END PULLS SHALL BE TREATED WITH RUST INHIBITOR IN ACCORDANCE WITH MIL-C-85054 OR EQUIVALENT.

   ZINC COATING - TURNBUCKLE BODY AND END PULLS SHALL BE ZINC COATED AS SPECIFIED IN PROCUREMENT SPECIFICATION, ASTM B633, TYPE II, FE/ZN 13.

4. THREADS ONE END PULL AND THE CORRESPONDING HEAD BODY SHALL HERVE RIGHT HAND THREAD AND THE OTHER LEFT HAND. THE THREAD SHALL BE MACHINED AFTER FABRICATION OF END PULL AND THE HEAD BODY.

5. LENGTH OF HEAD: THE LENGTH OF THE HEAD OF THE TURNBUCKLE BODY SHALL BE NOT LESS THAN 1 1/2 TIMES THE NOMINAL THREAD SIZE FOR SIZES UP TO 1.250, AND 1 1/4 TIMES FOR SIZES GREATER THAN 1.250 NOMINAL THREAD SIZE

6. BREAKING STRENGTH: THE BREAKING STRENGTH OF THE TURNBUCKLE SHALL BE NOT LESS THAN THE VALUE SPECIFIED IN THE PROCUREMENT SPECIFICATION FOR TYPE I, FORM 1, WITH HOOK AND EYE END PULLS

7 BENDING STRENGTH: THE BENDING STRENGTH SHALL BE AS SPECIFIED IN THE PROCUREMENT SPECIFICATION.

8 LENGTH OF THREAD THE LENGTH OF THE THREAD ON THE TWO END PULLS SHALL BE GREAT ENOUGH SO THAT THE ENDS OF THE END PULLS CAN BE BROUGHT INTO CONTACT WITH EACH OTHER AT THE MIDDLE OF THE BODY LENGTH

9 PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER, FOLLOWED BY A DASH NUMBER FROM TABLE I AND THE FINISH CODE BELOW:

FINISH CODE:

F - RUST INHIBITOR TREATMENT
Z - ZINC COATED

EXAMPLE MS51565-7Z

- FINISH CODE
- DASH NUMBER
- BASIC MS NUMBER

MS51565-7Z INDICATES TURNBUCKLE, ROUND BODY, HOOK AND EYE END PULLS; 625-11 THREAD, 6-INCH CLEAR OPENING BETWEEN HEADS, ZINC COATED

APPROVED 11 FEB 1988 REVISED

USER ACTIVITIES: ARMY-ME NAVY-AS,MC,OS,YD

REVIEWER ACTIVITIES: ARMY-CR AIR FORCE-82 DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

PREPARING ACTIVITY: ARMY-AR Other Cust NAVY-SH AIR FORCE-99	INTERNATIONAL INTEREST	TITLE: TURNBUCKLE, ROUND BODY, HOOK AND EYE (TYPE I, FORM I, CLASS 6)	MILITARY STANDARD MS51565
PROCUREMENT SPECIFICATION: FF-T-791	SUPERSEDES:		PAGE 2 OF 3

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5340-1805

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:07Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5340

NOTES:

1. ALL DIMENSIONS ARE IN INCHES. TOLERANCES SHALL BE IN ACCORDANCE WITH STANDARD MANUFACTURING PRACTICES FOR TURNBUCKLES.
2. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
3. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.
4. DIMENSION "A" IS THE TAKE UP LENGTH OR CLEAR OPENING OF THE BODY.

USER ACTIVITIES:
ARMY-ME
NAVY-AS, MC, OS, YD

REVIEWER ACTIVITIES:
ARMY-CR
AIR FORCE-82
DLA-IS

APPROVED 11 FEB 1966 REVISED

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for replacement use shall be made from this document, when applicable.

P.A. ARMY-AR Other Cust NAVY-SH AIR FORCE-99	GOVERNMENT INTEREST	TITLE TURNBUCKLE, ROUND BODY, HOOK AND EYE (TYPE I, FORM I, CLASS 6)	MILITARY STANDARD MS51565
PROCUREMENT SPECIFICATION FF-T-791	SUPERSEDES:		PAGE 3 OF 3

DD FORM 1 MAY 73 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5340-1805

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:07Z
Check the source to verify that this is the current version before use.