

FED. SUP CLASS
2350

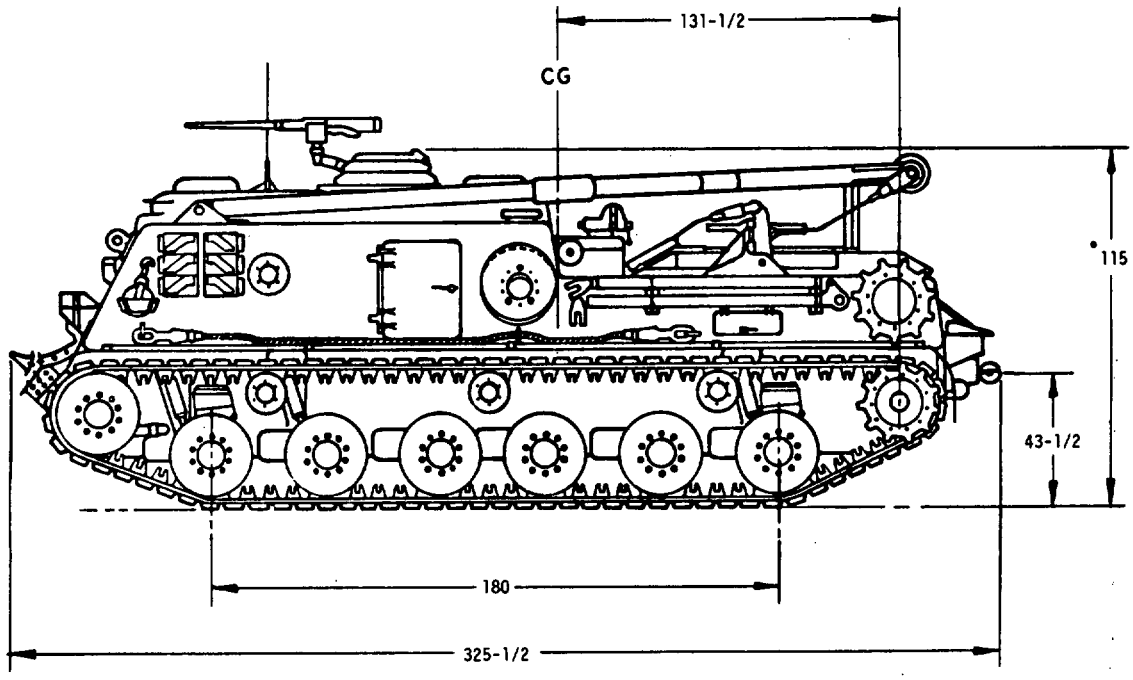

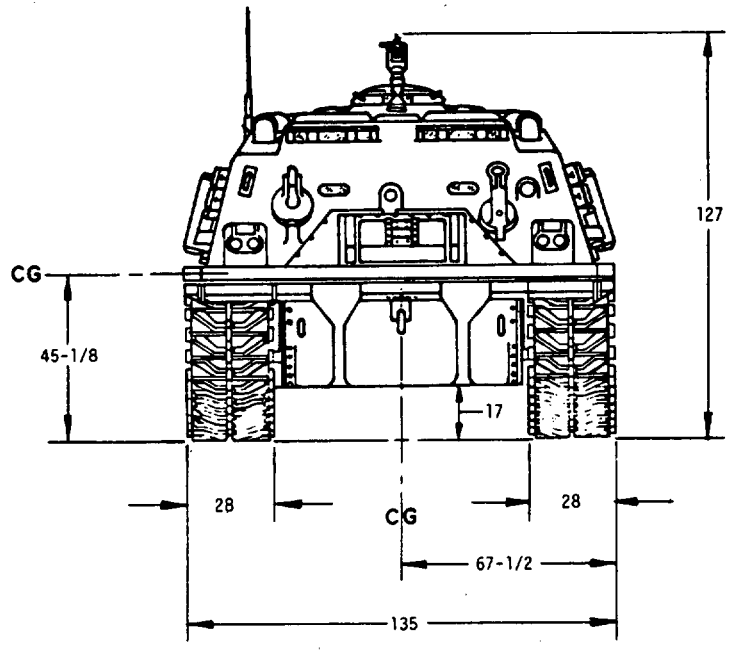

MS PART NO.	ENGINEERING DRAWING	DESCRIPTION
MS52135-1	8736950	WITH WINCH

Ⓑ ENTIRE STANDARD REVISED

APPROVED 27 DEC 76 REVISED Ⓑ 3 JUL 85

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE: RECOVERY VEHICLE, FULL-TRACKED: MEDIUM, M88A1	MILITARY STANDARD MS52135(AT)
PROCUREMENT SPECIFICATION MIL-R-62195	SUPERSEDES:		SHEET 1 OF 2

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23118:202
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2350

VEHICLE CHARACTERISTICS

WEIGHT:
COMBAT LOADED, 112,000 LBS
4 MAN CREW
LESS CREW, STOWAGE AND FUEL 110,000 LBS
GROUND PRESSURE 10.9 LBS/SQ IN

VISION AND SIGHTING EQUIPMENT: (DRIVER'S)
7 PERISCOPE, VISION M17 7043549
1 VIEWER, PASSIVE NIGHT
AN-VVS-2(V)1A SM-D-771480-1

ARMAMENT:
MACHINE GUN, 50 CAL, M2, HB 7265636
10 LAUNCHER, LAW 2
SUB-MACHINE GUN, 45 CAL, M3A1 6721771
2 RIFLE, 7.62MM, M14 OR 5.56MM, M16

AMMUNITION:
50 CAL 1500 ROUNDS
45 CAL 360 ROUNDS
7.62MM OR 5.56MM 300 ROUNDS
HAND GRENADES 8

RUNNING GEAR:
SUSPENSION, TYPE TORSION BAR
12 DUAL WHEELS, SIZE 26
TRACK, T107 RUBBER CHEVRON, DOUBLE PIN
NO OF TRACK SHOES 84/SIDE
PITCH 7-3/4, WIDTH 28
TIRES, SOLID RUBBER 6 X 26 24 REQD

ELECTRICAL SYSTEM: INST'N 11671787
NOMINAL VOLTAGE, 24 VOLTS
GENERATOR, MAIN 300 AMPS 8717421
GENERATOR, AUX 150 AMPS
6 BATTERIES, 6TN, 12 VOLT MS35000

GENERAL:
THE M88A1 MEDIUM FULL-TRACKED VEHICLE IS INTENDED PRIMARILY FOR RECOVERING TANKS AND OTHER MECHANIZED EQUIPMENT, ESPECIALLY UNDER FIRE FROM FIELD OF BATTLE, BY TOWING OR BY COMBINED LIFTING AND TOWING. THE VEHICLE IS EQUIPPED WITH A TOWING WINCH HAVING A 1-1/4 IN DIA CABLE, 200 FEET IN LENGTH, CAPABLE OF A MAX LINE PULL AND SPEED OF 90,000 LBS AT 29 FEET PER MINUTE. ALSO A HOISTING WINCH WITH A 5/8 IN DIA CABLE, 200 FEET IN LENGTH, WITH A MAX LINE PULL AND LIFTING SPEED OF 50,000 LBS AT 9 F. P. M. THE VEHICLE ACCOMMADATES A FOUR MAN CREW CONSISTING OF A COMMANDER, DRIVER, MECHANIC, AND A RIGGER.

ENGINE: (DIESEL)
12 CYL, 90°, AIR-COOLED,
SUPER CHARGED
DISPLACEMENT 1,790 CU IN
BORE 5.750 STROKE 5.750
GOVERNED SPEED 2400 RPM
COMPRESSION RATIO 16:1
FUEL CAPACITY 400 GAL'S
MAX GROSS HORSPOWER 750@ 2400 RPM
MAX NET HORSEPOWER 642@ 2400 RPM
MAX GROSS TORQUE 1,720 LB FT@ 2000 RPM
MAX NET TORQUE 1,630 LB FT@ 1850 RPM
COOLING SYSTEM, AIR, 20,000 CFM@ 2400 RPM
ENGINE OIL CAPACITY 78 QTS

TRANSMISSION:
3 SPEEDS FORWARD, 1 REVERSE
OIL CAPACITY 108 QTS
REFILL 72 QTS

MAIN WINCH & SPADE: (INST'N) 11672158
WINCH CABLE 1-1/4 DIA X 200 FT

HOIST WINCH: (INST'N) 11672159
WINCH CABLE 5/8 DIA X 200 FT

BOOM: (INST'N) 8764519

COMMUNICATIONS:
RADIO AND INTERPHONE
AN/VCR 44,46 OR 64 WITH
INTERPHONE AN/VIC 1 (4 CONTROLS)
SUPPRESSOR MX7778A

FIRE EXTINGUISHERS:
FIXED, EIGHT 10 LB CO_2 7714476
PORTABLE, TWO 5 LB CO_2 7714780

PERFORMANCE:
MAX DRAWBAR PULL 90,000 LBS
GROSS HORSEPOWER TO WEIGHT RATIO 13.4 HP/TON
MAX SPEED 27 MPH
MAX GRADE 60%
MAX TRENCH 103 IN
MAX VERTICAL WALL 42 IN
CRUISING RANGE 300 MILES
FORDING KIT 11672032
MAX FORDING DEPTH 102 W/KIT
56 WO/KIT

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES OF WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48397-5000.

(B) ENTIRE STANDARD REVISED

MS PART NO.	ENGINEERING DRAWING	DESCRIPTION
MS52135-1	8736950	WITH WINCH

APPROVED 27 DEC 76
REVISED (B) 3 JUL 85

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE RECOVERY VEHICLE, FULL-TRACKED: MEDIUM, M88A1	MILITARY STANDARD MS52135(AT)
PROCUREMENT SPECIFICATION MIL-R-62195	SUPERSEDES:		SHEET 2 OF 2

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION
PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:20Z
Check the source to verify that this is the current version before use.