


FED. SUP CLASS
2350

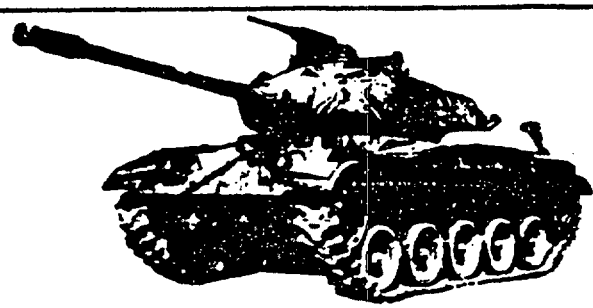

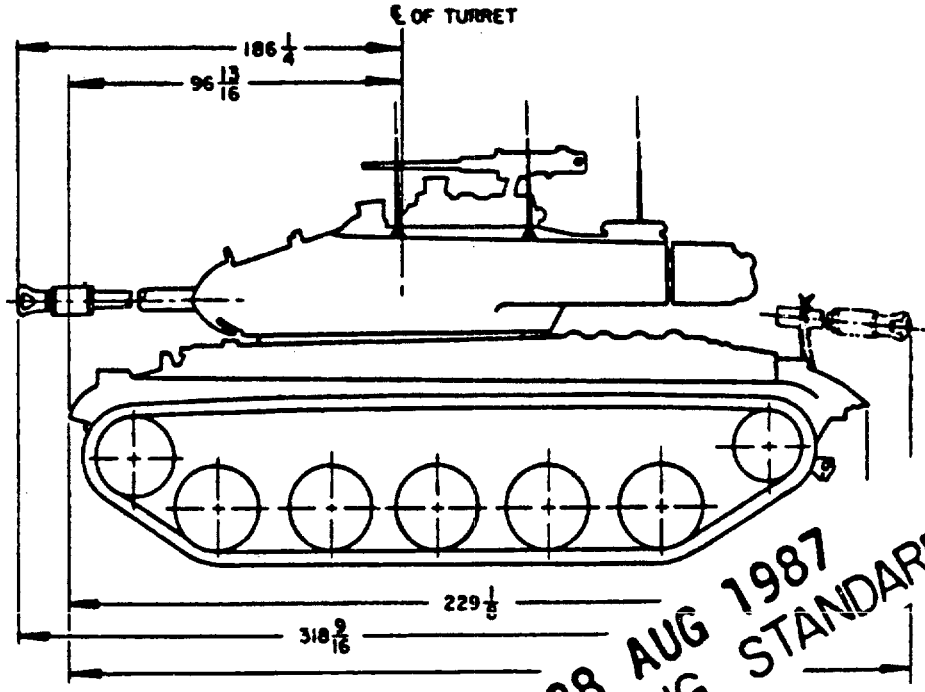

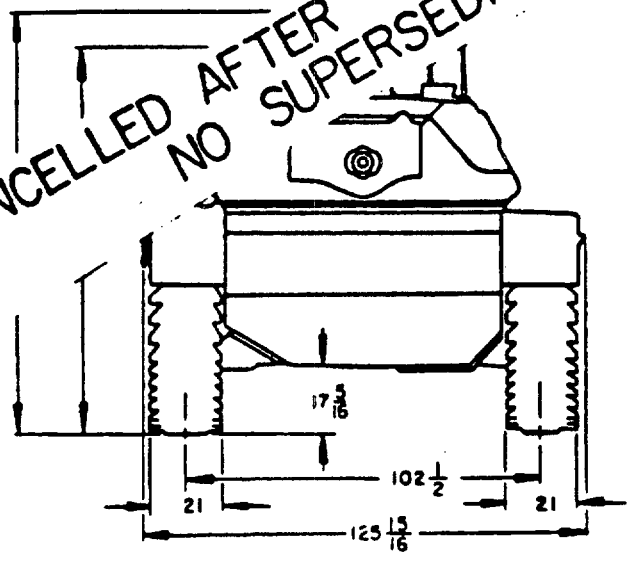

Ⓐ CANCELLED AFTER 28 AUG 1987
NO SUPERSEDING STANDARD.

NOTE:
ALL DIMENSIONS SHOWN ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.

APPROVED 25 JULY 1963 REVISED Ⓐ 28 Aug 1987

MS PART NO.	DRAWING NO.
MS 53056 -1	F8736131

P.A MO.
Other Cust

TITLE
TANK, COMBAT, FULL TRACKED— 76MM GUN, M41A2

MILITARY STANDARD
MS 53056 (MO)
SHEET 1 OF 2

PROCUREMENT SPECIFICATION
MIL-T-10001

SUPERSEDES

This standard has been approved by the MOBILITY COMMAND Department of the ARMY and is mandatory for use by the activity. All other military activities are required to employ this standard where suitable.

DD FORM 1426 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

2350-A385

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:20Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
2350

VEHICLE CHARACTERISTICS

GENERAL

WEIGHT (COMBAT LOADED) APPROX. 51,000 LBS.
CREW 4
WEIGHT (LESS CREW, STOWAGE AND FUEL) 44,691 LBS.
CENTER OF GRAVITY 45.275 IN. ABOVE GROUND 87.517 IN. FROM CENTER LINE OF SPROCKETS
UNIT GROUND PRESSURE 9.7 LBS/SQ. INCH
TURRET RING 73 IN. DIAMETER (INSIDE)

VISION AND SIGHTING EQUIPMENT

PERISCOPE (VISION) DRIVER'S	TYPE M17	QTY. 4
PERISCOPE (VISION) LOADER'S	TYPE M13	QTY. 1
SIGHT, PERISCOPE COMMANDER'S	TYPE M20A1	QTY. 1
SIGHT, PERISCOPE GUNNER'S	TYPE M20A1	QTY. 1
SIGHT, TELESCOPE	TYPE M97	QTY. 1
QUADRANT, ELEVATION	TYPE M9	QTY. 1
QUADRANT, GUNNER'S	TYPE M1	QTY. 1

ARMAMENT

PRIMARY GUN, 76 MM, M32 (T91E3), IN MOUNT M76A1
RECOIL MECH. TYPE CONCENTRIC
TRAVERSE, RIGHT 360° LEFT 360° RATE 6 RPM
POWER, TYPE HYD. ELECTRIC MANUAL TYPE GEAR TRAIN
ELEVATION +19° 45' DEPRESSION -9° 45'
RATE 240° PER MIN.
STABILIZER SYSTEM, NONE LOADING, MANUAL

SECONDARY ARMAMENT

1. 1 MG, CAL. 50 HB, M2E1 COAXIAL W/76 MM GUN
TRAVERSE, 360° ELEVATION +19° -9° 45'
OR
1 MG, CAL. 30 M1919A4E1 COAXIAL W/76 MM GU
TRAVERSE, 360° ELEVATION +19° -9° 4
2. 1 MG, CAL 50 HB M2 FLEX. TURRET ROOF MT., TRAVERSE, 360° ELEVATION +6
OTHER
1 SMG, CAL. .45, M3A1, CARBI

AMMUNITION

57 RDS. 76 MM 600 RD
2175 RDS. CAL. 50 COAX
4900 RDS, CAL. 30 CO
OTHER: 8 GRENADE

RUNNING GEAR

SUSPENSION,
NO. OF WHEE WHEEL SIZE 25½ IN.
TRACK, TYPE ETACHABLE RUBBER PADS,
CENTER GU IN
NO. SHOES/TRA PITCH 6 IN. WIDTH 21 IN.
TIRES: NO. 20 TYPE SOLID RUBBER
SIZE 25 1/2 x 4 1/2 IN.

ELECTRICAL SYSTEM

NOMINAL VOLTAGE 24 VOLTS
GENERATOR, MAIN, AMPERES 150 PART NO. 8724633
GENERATOR, AUX'L AMPERES 300 PART NO. 7402334
BATTERY, MS 35000-4 QTY. 4, TYPE 6 TN; 12 V, 100 AMP. HRS.
IGNITION SYSTEM (BATTERY) MAGNETO, SCINTILLA QTY. 2
MAGNETO, MS 51333 COIL, MS 51355-1

POWER PACKAGE

ENGINE

TYPE, 6 CYLINDER, HORIZONTAL OPPOSED, AIR-COOLED, FUEL INJECTION, MS 51314-1
DISPLACEMENT 895 CU. IN. BORE 5.75 IN.
STROKE 5.75 IN.
GOVERNED SPEED 2800 RPM COMPRESSION RATIO 5.5:1
FUEL, GASOLINE RATING, 80 OCTANE CAPACITY 140 GAL. (APPROX.)

MAX. GROSS HORSEPOWER	500	@ 2800 RPM
MAX. NET HORSEPOWER	446	@ 2400 RPM
MAX. GROSS TORQUE	955 LB. FT.	@ 2400 RPM
MAX. NET TORQUE	890 LB. FT.	@ 2200 RPM

MAIN COOLING SYSTEM, AIR ENG. OIL CAP. 44 QTS.
OIL COOLING SYSTEM, ENGINE MOUNTED COOLER AIR COOLED WITH ENGINE DRIVEN FAN

POWER TRAIN

TYPE, CROSS DRIVE TRANSMISSIO ET NO. 7527947
HYDRAULIC CONVERTER SINGLE LTIPHASE
STALL MULTIPLICATION
OVERALL USEABLE RATIO M 3.9
DIRECT 1:1 RE
STEERING RATE 6.P , PIVOT
TO INFINITY
STEERING CO
BRAKES MI , MECHANICAL
FOO
OIL MOUNTED COOLER AIR
EN FAN

RATIO 4.25 TO 1 FT./REV. 6
CH DIA. 23.422 NO. OF TEETH 12

ATIONS

SET AN/GRC-3 OR 7 OR 6 LOCATION TURRET BUSTLE
RADIO SET AN/GRC-3 OR 7 AND AN/GRC-3 LOCATION (AN/ARC IN TURRET STOWAGE BOX)
INTERPHONE MODEL, PART OF RADIO SET OR AN/UIC
NO. OF OUTLETS 4
EXTERNAL INTERPHONE EXTENSION KIT-MODEL AN/VIA-1

FIRE EXTINGUISHER

PART NO. 7714476 FIXED TWO-10 LB. CO_2
PART NO. 7714780 PORTABLE ONE 5 LB. CO_2

PERFORMANCE

GROSS HORSEPOWER TO WEIGHT RATIO 19.3 HP/TON
MAX. TRACTIVE EFFORT 44,000 LBS TE/W 85.9%
MAX. SPEED 45 MPH MAX. GRADE 60%
MAX. TRENCH CROSSING WIDTH 72 IN. MAX. VERTICAL WALL 28 IN.
CRUISING RANGE 110 MILES W/KIT 280 MILES
MAX. FORDING DEPTH 48 IN. W/KIT TOP OF TURRET

THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED DRAWING NO. 8736131 COPY OF WHICH MAY BE OBTAINED FROM ARMY TANK AUTOMOTIVE CENTER, DETROIT ARSENAL, CENTER LINE, MICHIGAN, ATTN: STANDARDIZATION BRANCH.

A CANCELLED AFTER 28 AUG 1987
NO SUPERSEDING STANDARD

APPROVED 25 JULY 1963 REVISED (A) 28 Aug 1987

This standard has been approved by the MORALITY COMMAND Department of the ARMY and is mandatory for use by that activity. All other military activities are required to employ this standard when suitable

P.A MO.	TITLE	MILITARY STANDARD
Other Cust	TANK, COMBAT, FULL TRACKED— 76MM GUN, M41A2	MS53056 (MO)
PROCUREMENT SPECIFICATION MIL-T-10401	SUPERSEDES	SHEET 2

DD FORM 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:20Z
Check the source to verify that this is the current version before use.