FED SUP CLASS
5306

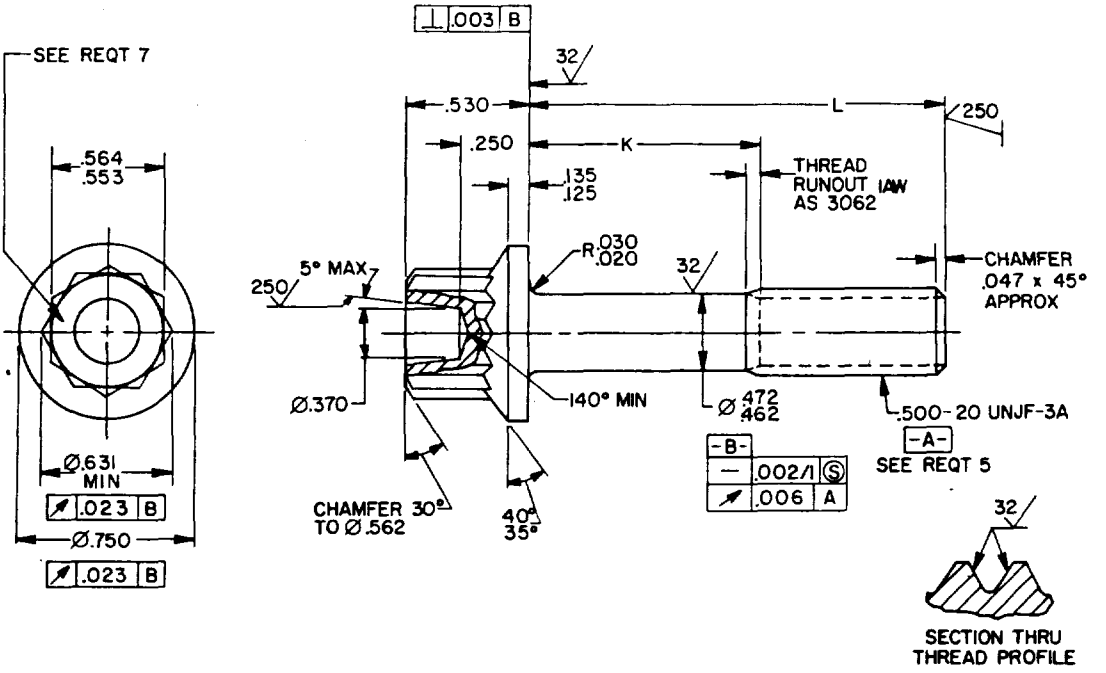



TABLE I. DASH NUMBERS AND DIMENSIONS

| DASH NO. | L | K | APPROX WEIGHT LB/100 |
|---|---|---|---|
| -04 | .812 | .105- .125 | 7.83 |
| -05 | .875 | .105- .125 | 8.12 |
| -06 | .938 | .105- .125 | 8.41 |
| -07 | 1.000 | .105- .125 | 8.70 |
| -08 | 1.062 | .105- .125 | 8.99 |
| -09 | 1.125 | .105- .125 | 9.28 |
| -10 | 1.188 | .105- .125 | 9.57 |
| -11 | 1.250 | .105- .125 | 9.86 |
| -12 | 1.312 | .105- .125 | 10.15 |
| -13 | 1.375 | .125- .145 | 10.45 |
| -14 | 1.438 | .128- .188 | 10.74 |
| -15 | 1.500 | .190- .250 | 11.04 |
| -16 | 1.562 | .252- .312 | 11.33 |
| -17 | 1.625 | .315- .375 | 11.63 |
| -18 | 1.688 | .378- .438 | 11.92 |
| -19 | 1.750 | .440- .500 | 12.22 |
| -20 | 1.875 | .565- .625 | 12.81 |
| -21 | 2.000 | .690- .750 | 13.41 |
| -22 | 2.125 | .815- .875 | 14.00 |
| -23 | 2.250 | .940-1.000 | 14.61 |
| -24 | 2.375 | 1.065-1.125 | 15.21 |
| -25 | 2.500 | 1.190-1.250 | 15.82 |
| -26 | 2.625 | 1.315-1.375 | 16.42 |
| -27 | 2.750 | 1.440-1.500 | 17.01 |
| -28 | 2.875 | 1.565-1.625 | 17.61 |
| -29 | 3.000 | 1.690-1.750 | 18.22 |
| -30 | 3.125 | 1.815-1.875 | 18.83 |
| -31 | 3.250 | 1.940-2.000 | 19.43 |
| -32 | 3.375 | 2.065-2 125 | 20.04 |
| -33 | 3.500 | 2.190-2.250 | 20.65 |
| -34 | 3.625 | 2.315-2.375 | 21.26 |
| -35 | 3.750 | 2.440-2.500 | 21.86 |
| -36 | 3.875 | 2.565-2.625 | 22.47 |
| -37 | 4.000 | 2.690-2.750 | 23.07 |
| -38 | 4.125 | 2.815-2.875 | 23.68 |
| -39 | 4.250 | 2.940-3.000 | 24.29 |
| -40 | 4.375 | 3.065-3.125 | 24.89 |
| -41 | 4.500 | 3.190-3.250 | 25.50 |
| -42 | 4.625 | 3.315-3.375 | 26.11 |
| -43 | 4.750 | 3.440-3.500 | 26.71 |
| -44 | 4.875 | 3.565-3.625 | 27.32 |
| -45 | 5.000 | 3.690-3.750 | 27.92 |
| -46 | 5.125 | 3.815-3.875 | 28.53 |
| -47 | 5.250 | 3.940-4.000 | 29.13 |
| -48 | 5.375 | 4.065-4.125 | 29.74 |
| -49 | 5.500 | 4.190-4.250 | 30.35 |
| -50 | 5.625 | 4.315-4.375 | 30.95 |
| -51 | 5.750 | 4.440-4.500 | 31.56 |
| -52 | 5.875 | 4.565-4.625 | 32.16 |
| -53 | 6.000 | 4.690-4.750 | 32.77 |

Ⓐ ENTIRE STANDARD REVISED

APPROVED 10 DEC 63 REVISED Ⓐ 27 MAY 88

| P.A. NAVY - AS Other Cust | INTERNATIONAL INTEREST | TITLE BOLT, MACHINE-STEEL, DIFFUSED NICKEL-CADMIUM PLATED, DOUBLE HEXAGON EXTENDED WASHER HEAD, .500-20 UNJF-3A | MILITARY STANDARD MS9213 |
|---|---|---|---|
| PROCUREMENT SPECIFICATION AMS 7459 | SUPERSEDES | | PAGE 1 OF 2 |

DD FORM 672-1 (LIMITED COORDINATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5306-N166

USER ACTIVITIES:

REVIEWER ACTIVITIES: DLA - IS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.


AMSC N/A

Source: https://assist.dla.mil - Downloaded: 2026-10-23T13:13Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. MATERIAL: STEEL IN ACCORDANCE WITH AMS 6304 (UNS K14675).
2. HARDNESS: ROCKWELL C42-46.
3. FINISH: DIFFUSED NICKEL-CADMIUM PLATE IN ACCORDANCE WITH AMS 2416. DIMENSIONS SPECIFIED ARE AFTER PLATING. CONTACT POINTS PERMISSIBLE. PD MAY BE REDUCED .0012 MAX BEFORE PLATING.
4. MAGNETIC PARTICLE INSPECTION: MAGNETIC PARTICLE INSPECTION IN ACCORDANCE WITH AMS 2640 BEFORE PLATING.
5. THREADS: THREADS IN ACCORDANCE WITH MIL-S-8879. INCOMPLETE THREADS NOT TO ENTER FILLET.
6. DIMENSIONING AND TOLERANCING: DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14.5M.
7. MARKING: MARK PART NUMBER AND MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH AS 478, CLASS A.
8. EDGES: BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
9. SURFACE TEXTURE: SURFACE TEXTURE IN ACCORDANCE WITH ANSI/ASME B46.1. UNLESS OTHERWISE SPECIFIED, SURFACE TO BE 125 MICROINCHES EXCEPT UPSET HEAD.
10. TOLERANCES: UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE FOR LINEAR DIMENSIONS ±.010, ANGULAR DIMENSION ±5°.
11. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I.

EXAMPLE: MS9213-04




MS9213-04 INDICATES - BOLT, MACHINE - STEEL AMS 6304, DIFFUSED NICKEL-CADMIUM PLATED, DOUBLE HEXAGON EXTENDED WASHER HEAD, .500-20 UNJF-3A x .812 LONG.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. DO NOT USE UNASSIGNED PART NUMBERS.
3. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
4. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.
5. THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE SAE AEROSPACE PROPULSION DIVISION.
6. AS AND AMS ARE SAE PUBLICATIONS.

APPROVED 10 DEC 63 REVISED (A) FOR CHANGES SEE PAGES 1 AND 2

USER ACTIVITIES:
REVIEWER ACTIVITIES: DLA - IS
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

| P.A. NAVY - AS Other Cust | INTERNATIONAL INTEREST | TITLE BOLT, MACHINE-STEEL, DIFFUSED NICKEL-CADMIUM PLATED, DOUBLE HEXAGON EXTENDED WASHER HEAD, .500-20 UNJF-3A | MILITARY STANDARD MS9213 |
|---|---|---|---|
| PROCUREMENT SPECIFICATION AMS 7459 | SUPERSEDES | | PAGE 2 OF 2 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:13Z
Check to verify that this is the current version before use.