INCH-POUND

MS9315D
30 July 2020
SUPERSEDING
MS9315C
16 February 2010

DETAIL SPECIFICATION SHEET

CAP ASSEMBLY, TUBE - SAE-AMS5646,
SILVER PLATED NUT

This specification is approved for use by all Departments and Agencies
of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet.

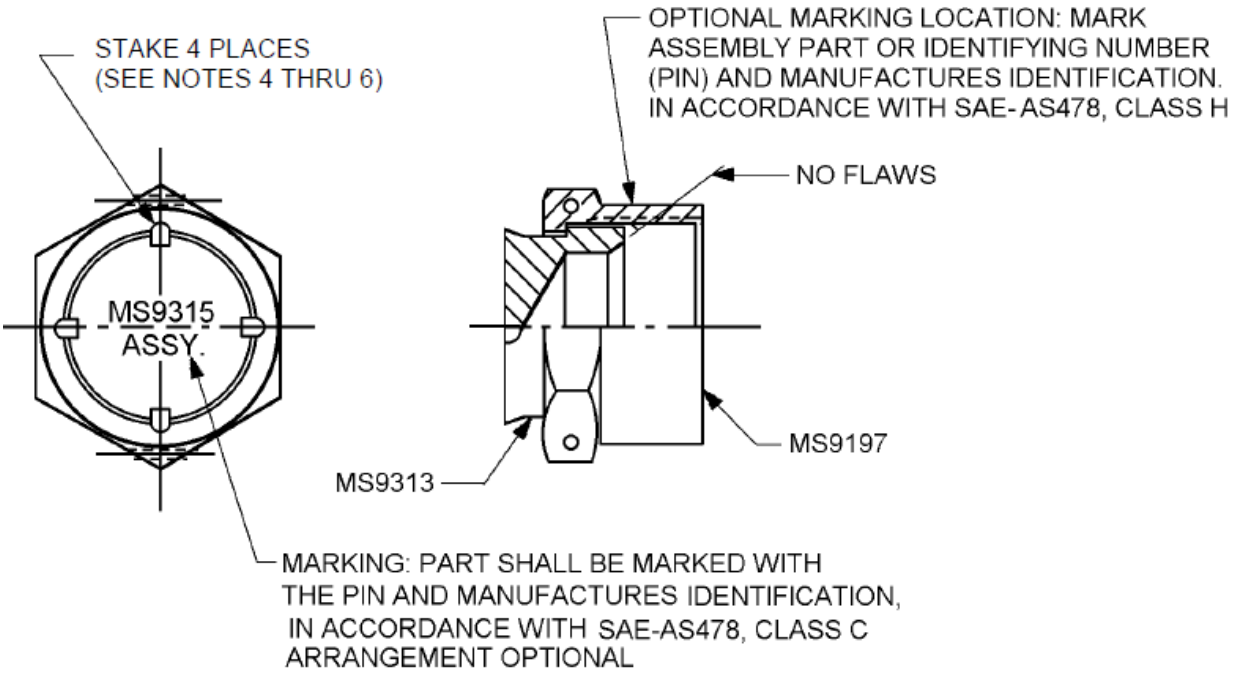


FIGURE 1. Cap assembly, tube.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:15Z
Check the source to verify that this is the current version before use.

Dash number	Tube OD (reference) inch (mm)	Nut	Cap	Approx weight lb/100 (kg/100)
-02	.125 (3.18)	MS9197-02	MS9313-02	1.58 (0.7)
-03	.188 (4.78)	MS9197-03	MS9313-03	2.11 (1.0)
-04	.250 (6.35)	MS9197-04	MS9313-04	2.83 (1.3)
-05	.313 (7.95)	MS9197-05	MS9313-05	4.04 (1.8)
-06	.375 (9.53)	MS9197-06	MS9313-06	4.59 (2.1)
-07	.438 (11.13)	MS9197-07	MS9313-07	5.60 (2.5)
-08	.500 (12.70)	MS9197-08	MS9313-08	7.95 (3.6)
-09	.562 (14.27)	MS9197-09	MS9313-09	9.13 (4.1)
-10	.625 (15.88)	MS9197-10	MS9313-10	10.67 (4.8)
-11	.688 (17.48)	MS9197-11	MS9313-11	13.53 (6.1)
-12	.750 (19.05)	MS9197-12	MS9313-12	16.30 (7.4)
-14	.875 (22.23)	MS9197-14	MS9313-14	20.25 (9.2)
-16	1.000 (25.40)	MS9197-16	MS9313-16	23.56 (10.7)
-18	1.125 (28.58)	MS9197-18	MS9313-18	33.74 (15.3)
-20	1.250 (31.75)	MS9197-20	MS9313-20	37.02 (16.8)
-24	1.500 (38.10)	MS9197-24	MS9313-24	51.51 (23.4)
-28	1.750 (44.45)	MS9197-28	MS9313-28	76.61 (34.7)
-32	2.000 (50.80)	MS9197-32	MS9313-32	91.65 (41.6)
-40	2.500 (63.50)	MS9197-40	MS9313-40	118.37 (53.7)
-48	3.000 (76.20)	MS9197-48	MS9313-48	153.98 (69.8)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Assembly shall be free of all burrs and slivers.
4. After staking cap shall be movable, spin freely, and permanently secured to the nut to prevent assembly from coming apart.
5. Do not support cap on seat during staking or marking PIN.
6. Caps shall be free from defects (cracks, etc.) as a result from staking.
7. For design features purposes, this standard takes precedence over documents referenced herein.

FIGURE 1. Cap assembly, tube - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:15Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

Material: Steel, corrosion and heat-resistant in accordance with SAE-AMS5646.

PIN:

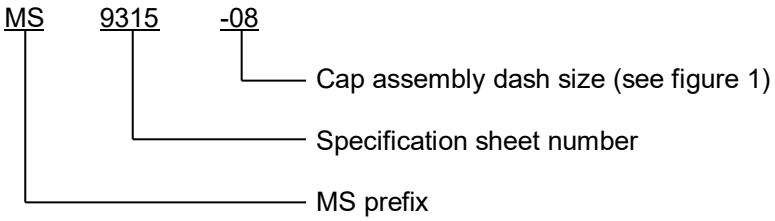

PIN Example: MS9315-08 identifies a cap assembly for a tube OD .500 inches, CRES.

Do not use unassigned PIN's.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. This document references the following:

MS9313
MS9197
SAE-AS478
SAE-AMS5646

CONCLUDING MATERIAL

Custodians:
Navy - AS
Air Force - 71
DLA - CC

Preparing activity:
DLA - CC

(Project 4730-2020-073)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:15Z
Check the source to verify that this is the current version before use.