
MS9690

FED. SUP CLASS 5306

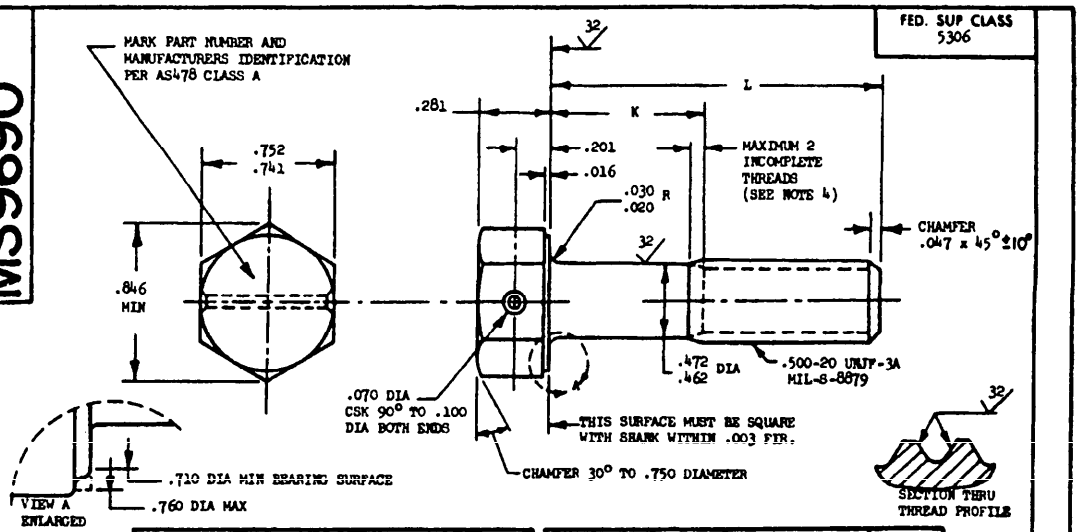

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9690-03	.750	.105- .125	7.47
MS9690-04	.812	.105- .125	7.77
MS9690-05	.875	.105- .125	8.07
MS9690-06	.938	.105- .125	8.37
MS9690-07	1.000	.105- .125	8.67
MS9690-08	1.062	.105- .125	8.98
MS9690-09	1.125	.105- .125	9.28
MS9690-10	1.188	.105- .125	9.58
MS9690-11	1.250	.105- .125	9.88
MS9690-12	1.312	.105- .125	10.19
MS9690-13	1.375	.105- .125	10.49
MS9690-14	1.438	.128- .188	10.79
MS9690-15	1.500	.190- .250	11.09
MS9690-16	1.562	.252- .312	11.39
MS9690-17	1.625	.315- .375	11.70
MS9690-18	1.688	.378- .438	12.00
MS9690-19	1.750	.440- .500	12.30
MS9690-20	1.812	.502- .562	12.60
MS9690-21	1.875	.565- .625	12.90
MS9690-22	1.938	.628- .688	13.20
MS9690-23	2.000	.690- .750	13.51
MS9690-24	2.125	.815- .875	14.11
MS9690-25	2.250	.940-1.000	14.72
MS9690-26	2.375	1.065-1.125	15.32
MS9690-27	2.500	1.190-1.250	15.93
MS9690-28	2.625	1.315-1.375	16.53
MS9690-29	2.750	1.440-1.500	17.13
MS9690-30	2.875	1.565-1.625	17.74

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9690-31	3.000	1.690-1.750	18.34
MS9690-32	3.125	1.815-1.875	18.95
MS9690-33	3.250	1.940-2.000	19.55
MS9690-34	3.375	2.065-2.125	20.16
MS9690-35	3.500	2.190-2.250	20.76
MS9690-36	3.625	2.315-2.375	21.36
MS9690-37	3.750	2.440-2.500	21.97
MS9690-38	3.875	2.565-2.625	22.57
MS9690-39	4.000	2.690-2.750	23.18
MS9690-40	4.125	2.815-2.875	23.78
MS9690-41	4.250	2.940-3.000	24.38
MS9690-42	4.375	3.065-3.125	24.99
MS9690-43	4.500	3.190-3.250	25.59
MS9690-44	4.625	3.315-3.375	26.20
MS9690-45	4.750	3.440-3.500	26.80
MS9690-46	4.875	3.565-3.625	27.41
MS9690-47	5.000	3.690-3.750	28.01
MS9690-48	5.125	3.815-3.875	28.61
MS9690-49	5.250	3.940-4.000	29.22
MS9690-50	5.375	4.065-4.125	29.82
MS9690-51	5.500	4.190-4.250	30.43
MS9690-52	5.625	4.315-4.375	31.03
MS9690-53	5.750	4.440-4.500	31.64
MS9690-54	5.875	4.565-4.625	32.24
MS9690-55	6.000	4.690-4.750	32.84

1. SHANK SHALL BE STRAIGHT WITHIN .002 TOTAL PER INCH OF BOLT LENGTH.
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .023 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL: STEEL AMS 6304.
6. HARDNESS: ROCKWELL C42-46.
7. FINISH: DIFFUSED NICKEL CADMIUM PLATE PER AMS 2416. DIMENSIONS SPECIFIED ARE AFTER PLATING. CONTACT POINTS PERMISSIBLE.
8. MANUFACTURING SPECIFICATION: AMS 7459.
9. MAGNETIC PARTICLE INSPECTION PER AMS 2640 BEFORE PLATING.
10. SURFACE TEXTURE: USAS B46.1-1962. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD.
11. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
12. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ± .010, ANGULAR DIMENSIONS ± 5°.
13. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIVISION.

APPROVED 8 Jul 71 REVISED

P.A. Air Force-11 Other Cust Navy - AS	INTERNATIONAL INTEREST ASCC AIR STD 17/2	TITLE BOLT, MACHINE - HEXAGON HEAD, DRILLED, 1 HOLE, PD SHANK, STEEL AMS 6304, DIFFUSED NICKEL CADMIUM PLATE, .500-20 UNJF-3A	MILITARY STANDARD MS9690
PROCUREMENT SPECIFICATION AMS7459	SUPERSEDES:		SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

This standard has been approved by the Department of Air Force and the Navy (AS) and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:22Z
Check the source to verify that this is the current version before use.