INCH-POUND
MS18204F
w/AMENDMENT 3
28 May 2025
SUPERSEDING
MS18204F
w/AMENDMENT 2
1 July 2014

DETAIL SPECIFICATION SHEET

SHELL, ELECTRICAL, CONNECTOR, RECEPTACLE, RECTANGULAR, POLARIZING

Reinstated after 10 July 2009 and may be used for new and existing designs and acquisitions.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-28748.


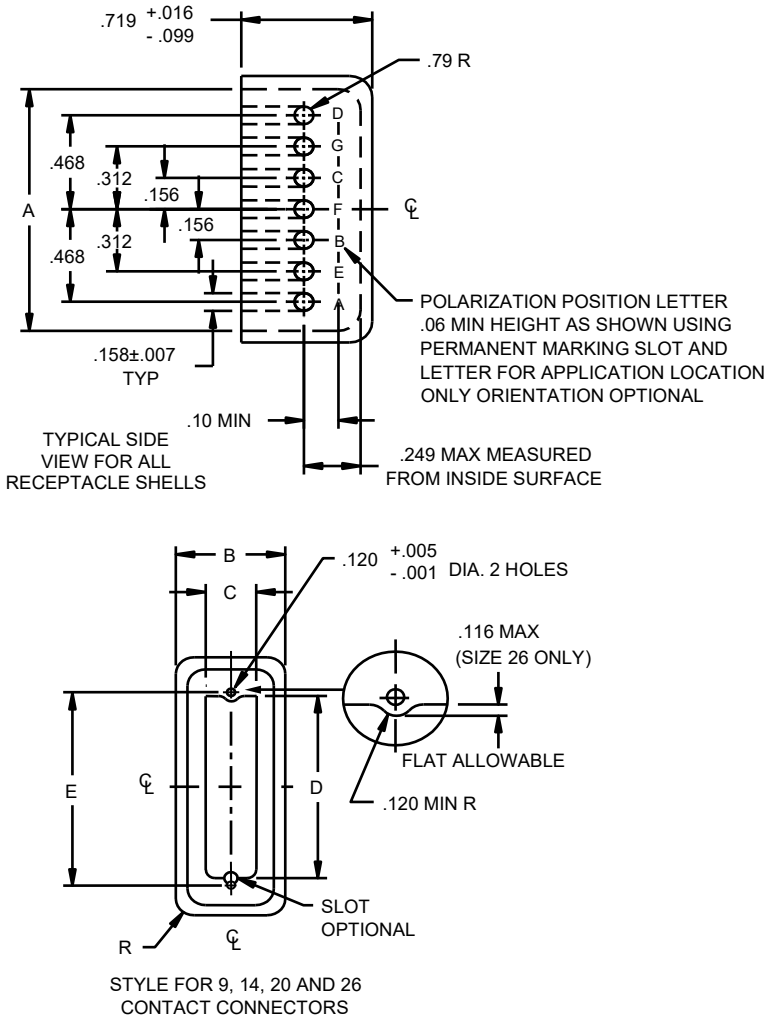


FIGURE 1. Receptacle shell, polarizing.

AMSC N/A
FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:17Z
Check the source to verify that this is the current version before use.

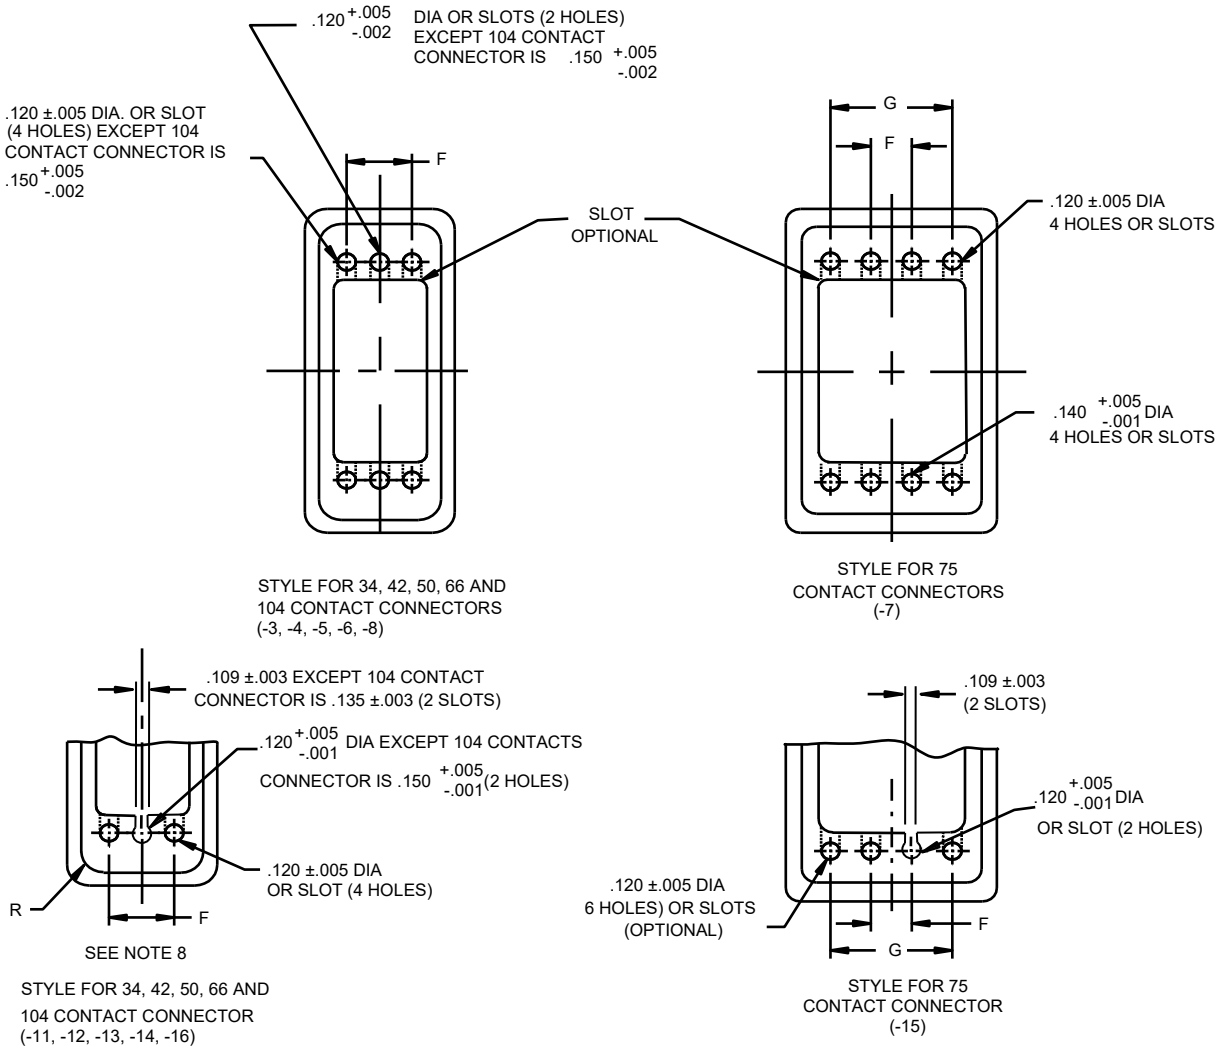

Inches	mm	Inches	mm
.001	0.03	.120	3.05
.002	0.05	.135	3.43
.003	0.08	.140	3.56
.005	0.13	.150	3.81
.016	0.41	.156	3.96
.021	0.53	.158	4.01
.060	1.52	.249	6.32
.099	2.51	.312	7.92
.109	2.77	.468	11.89
.116	2.95	.719	18.26

Receptacle shell MS18204, polarizing

FIGURE 1. Receptacle shell, polarizing – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:17Z
Check the source to verify that this is the current version before use.

Receptacle shell with polarization designator	Connector size (number of contacts)	A min	B min	C min	D min	E ±.005 (0.13 mm)	F ±.005 (0.13 mm)	G ±.005 (0.13 mm)	R
MS18204-9( )	9	1.448 (36.78)	.512 (13.00)	.375 (9.53)	.864 (21.95)	1.000 (25.40)	---	---	.141 (3.58)
MS18204-1( )	14	1.388 (35.26)	.575 (14.61)	.440 (11.18)	.800 (20.32)	.938 (23.83)	---	---	.141 (3.58)
MS18204-17( )	18	1.450 (36.83)	.696 (17.68)	.565 (14.35)	.880 (22.35)	1.00 (25.40)	---	---	.141 (3.58)
MS18204-2( )	20	1.702 (43.23)	.575 (14.61)	.440 (11.18)	1.097 (27.86)	1.250 (31.75)	---	---	.141 (3.58)
MS18204-10( )	26	1.763 (44.78)	.696 (17.68)	.565 (14.35)	1.182 (30.02)	1.312 (33.32)	---	---	.141 (3.58)
MS18204-3( )	34	2.138 (54.31)	.888 (22.56)	.745 (18.92)	1.400 (35.56)	1.688 (42.88)	.468 (11.89)	---	.141 (3.58)
MS18204-4( )	42	2.450 (62.23)	.888 (22.56)	.745 (18.92)	1.700 (43.18)	2.000 (50.80)	.468 (11.89)	---	.141 (3.58)
MS18204-5( )	50	2.856 (72.54)	1.015 (25.78)	.745 (18.92)	2.026 (51.46)	2.281 (57.94)	.468 (11.89)	---	.188 (4.78) (see note 4)
MS18204-6( )	66	2.420 (61.47)	1.264 (32.11)	1.115 (28.32)	1.696 (43.08)	1.969 (50.01	.500 (12.70)	---	.375 (9.53)
MS18204-7( )	75	2.855 (72.52)	1.370 (34.80)	1.104 (28.04)	2.026 (51.46)	2.281 (57.94)	.234 (5.94)	.766 (19.46)	.203 (5.16)
MS18204-8( )	104	2.900 (73.66)	1.680 (42.67)	1.476 (37.49)	2.073 (52.65)	2.375 (60.33)	.875 (22.23)	---	.422 (10.72)
MS18204-11( ) see note 9	34	2.138 (54.31)	.888 (22.56)	.745 (18.92)	1.400 (35.56)	1.688 (42.88)	.468 (11.89)	---	.141 (3.58)
MS18204-12( ) see note 9	42	2.450 (62.23)	.888 (22.56)	.745 (18.92)	1.700 (43.18)	2.000 (50.80)	.468 (11.89)	---	.141 (3.58)
MS18204-13( ) see note 9	50	2.856 (72.54)	1.015 (25.78)	.745 (18.92)	2.026 (51.46)	2.281 (57.94)	.468 (11.89)	---	.188 (4.78) (see note 4)
MS18204-14( ) see note 9	66	2.420 (61.47)	1.264 (32.11)	1.115 (28.32)	1.696 (43.08)	1.969 (50.01)	.500 (12.70)	---	.375 (9.53)
MS18204-15( ) see note 9	75	2.855 (72.52)	1.370 (34.80)	1.104 (28.04)	2.026 (51.46)	2.281 (57.94)	.234 (5.94)	.766 (19.46)	.203 (5.16)
MS18204-16( ) see note 9	104	2.900 (73.66)	1.680 (42.67)	1.476 (37.49)	2.073 (52.65)	2.375 (60.33)	.875 (22.23)	---	.422 (10.72)

Polarization designators ( ) indicate location of polarization slot designator A through G (see note 8).

FIGURE 1. Receptacle shell polarizing - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:17Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are ±.016 inch (0.41 mm).
4. Tolerance +.020 inch (0.51 mm) -.016 inch (0.41 mm).
5. Material aluminum alloy in accordance with SAE AMS4015, temper O, ASTM B209/B209M, temper H12, or Alloy 6061, temper T6, .040 inch (1.02 mm) thick.
6. Finish anodize in accordance with MIL-PRF-8625, type I or type II.
7. Each slot may vary ±.005 inch (0.13 mm) from centerline.
8. PIN examples:
   a. Polarization required, specify as MS18204-# (A through G). Example: MS18204-5D.
   b. Polarization not required, specify as MS18204-#. Example: MS18204-5.
9. Receptacle shell designators MS18204-11, -12, -13, -14, -15, and -16 are not used with one-piece jackscrew shields of MS24133.

FIGURE 1. Receptacle shell polarizing - Continued.

Qualification: Qualified sources for MIL-DTL-28748/1 through MIL-DTL-28748/6 that meet the qualification testing requirements in MIL-DTL-28748 require no further testing for the hardware.

Qualification of hardware only: the hardware shall be installed in a qualified connector and shall be subjected to the tests below in accordance with MIL-DTL-28748. Sample size, if qualifying all hardware configurations, shall be two connector pairs.

Visual and mechanical inspection
Vibration
Shock
Salt spray

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-28748, this document references the following:

MIL-PRF-8625
MIL-DTL-28748/1
MIL-DTL-28748/2
MIL-DTL-28748/3
MIL-DTL-28748/4
MIL-DTL-28748/5
MIL-DTL-28748/6
MS24133
ASTM B209/B209M
SAE AMS4015

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:17Z
Check the source to verify that this is the current version before use.

MS18204F
w/AMENDMENT 3

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2025-036)

Review activities:
Army - AM, AR, CR4
Navy - MC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:17Z
Check the source to verify that this is the current version before use.