INCH-POUND
MS25214H
4 December 2020
SUPERSEDING
MS25214G
13 April 2010

DETAIL SPECIFICATION SHEET

GUARD, SWITCH, 3 POSITION

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the switch described herein shall consist of this specification sheet and MIL-DTL-7703.


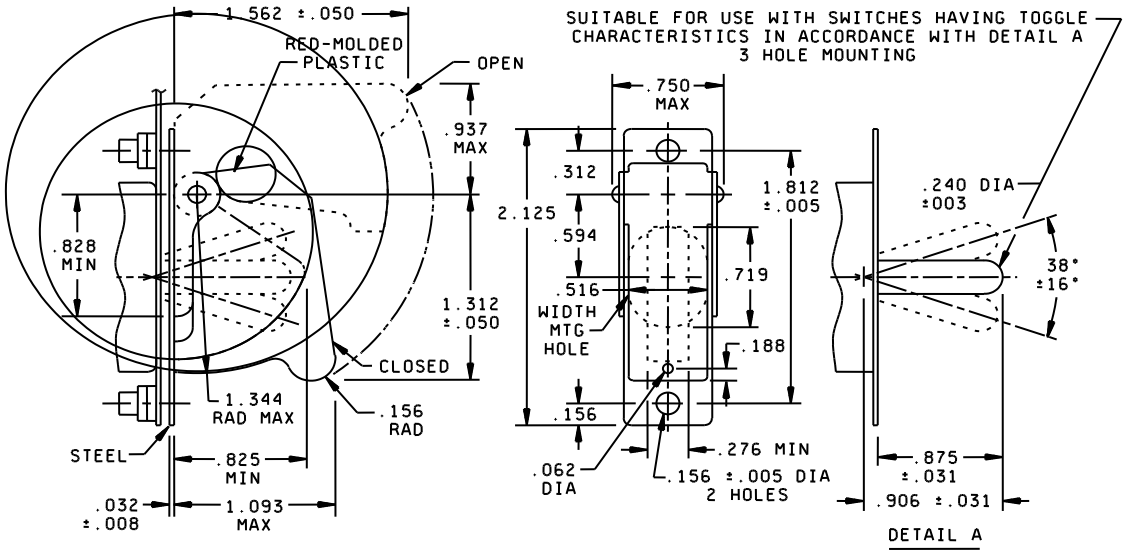


FIGURE 1. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:05Z
Check the source to verify that this is the current version before use.

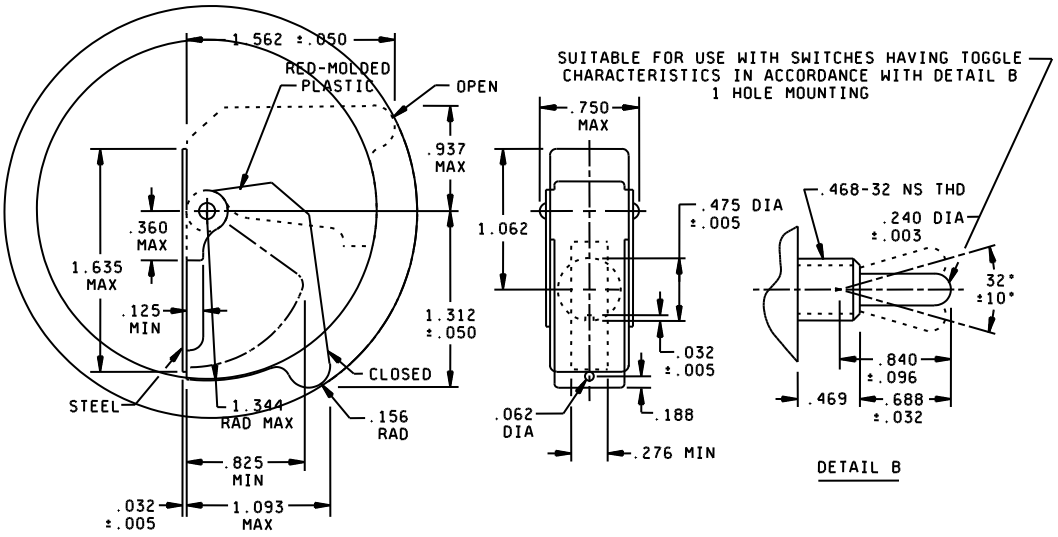

Inches	mm	Inches	mm	Inches	mm
.003	.08	.240	6.10	.828	21.03
.005	.13	.248	6.30	.840	21.34
.008	.20	.276	7.01	.875	22.22
.031	.79	.312	7.92	.906	23.01
.032	.81	.360	9.14	.937	23.80
.050	1.27	.469	11.91	1.062	26.97
.062	1.57	.516	13.11	1.093	27.76
.081	2.06	.594	15.09	1.312	33.32
.096	2.44	.688	17.47	1.344	34.14
.125	3.18	.719	18.26	1.562	39.67
.156	3.96	.750	19.05	1.635	41.53
.188	4.77	.825	20.95	1.812	46.02
				2.125	53.98

FIGURE 1. Dimensions and configuration Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:05Z
Check the source to verify that this is the current version before use.

DASH NO.	OPEN FORCE	TYPE	PANEL THICKNESS (REF)	REMARKS
-1 1/	1.0 to 2.5 LBS	3- HOLE MOUNTING	.050 TO .081	
-2		1- HOLE MOUNTING	.050 To .248	
-3				IDENTICAL TO -2, EXCEPT KEYWAY IS ROTATED 180°

1/ Inactive for new design, use for replacement only.

FIGURE 1. Dimensions and configuration – Continued.

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ± .016 on decimals.
3. Material: Plastic, molded, color 11136 of SAE-AMS-STD-595. Steel, commercial, shall be smooth and free from burrs.
4. Finish: Zinc plate, ASTM-B633 , type III, or cadmium plate, SAE-AMS-QQ-P-416, type III, with optional supplementary treatment per MIL-C-8514 or TT-C-490, black enamel, lusterless, color 37038 of SAE-AMS-STD-595 or semi gloss, color 27938 SAE-AMS-STD-595 or equivalent.
5. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

REQUIREMENTS

Opening the guard shall not move the switch contacts.

The guard shall remain in either open or closed position.

Closing the guard shall move the switch lever to the center position either from the up or down position.

Referenced documents shall be of the issue in effect on date of invitations for bid.

Referenced documents

MIL-DTL-7703
MIL-C-8514
ASTM-B633
TT-C-490
SAE-AMS-QQ-P-416
SAE-AMS-STD-595

The margins of this specification are marked with vertical lines to indicate where modifications from this revision were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodians:
Army – CR
Navy – AS
Air Force – 85
DLA – CC

Preparing activity
DLA – CC

(Project 5930-2020-054)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:05Z
Check the source to verify that this is the current version before use.